

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856653

Luminaire Tested: **LD6C60D010 EU6609027 6LBWLI**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P856653  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205209)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD6C60D010 EU6609027 6LBWLI  
Description: 6 INCH 6000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS  
AND 6LBW TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6336.0 lumens  
Efficiency: N/A  
Efficacy: 88.0 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 72  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P856653

CATALOG NUMBER: LD6C60D010 EU6609027 6LBWLI

### Luminous Intensity Polar Plot

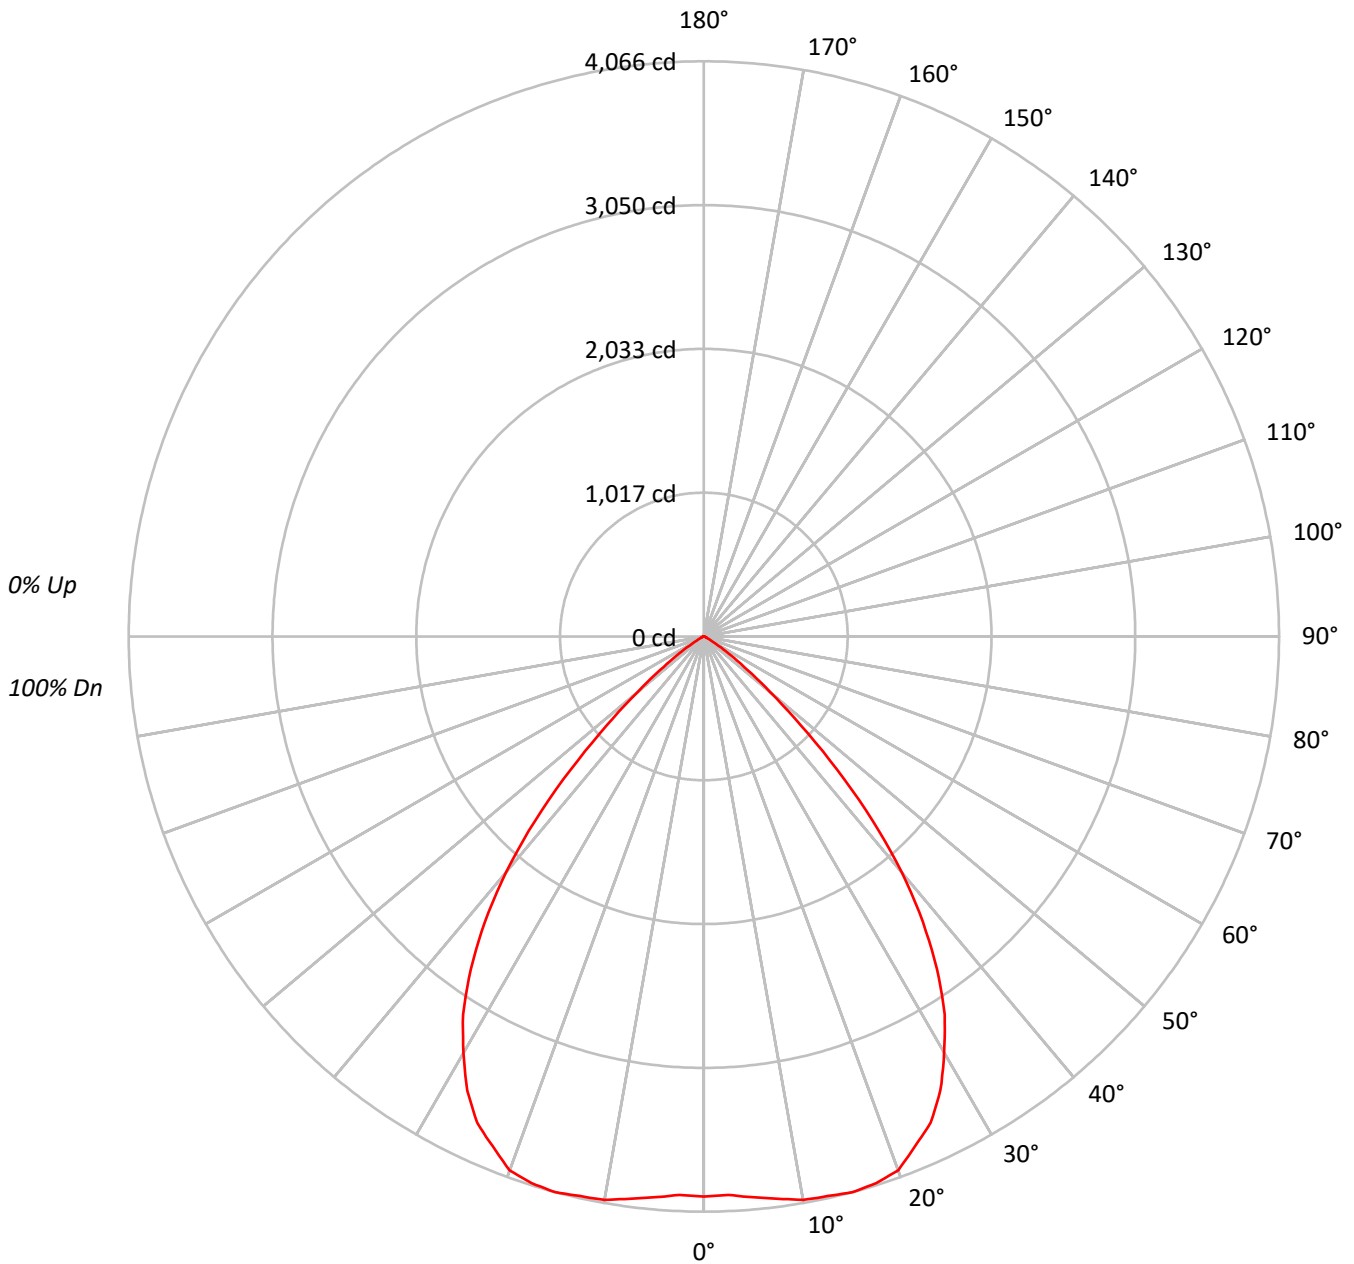



TEST NUMBER: P856653

CATALOG NUMBER: LD6C60D010 EU6609027 6LBWLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83	83	83	83
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76	76	76	76
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69	69	69	69
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63	63	63	63
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57	57	57	57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52	52	52	52
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48	48	48	48
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44	44	44	44
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41	41	41	41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	216995
5°	219001
10°	225129
15°	230762
20°	234264
25°	229423
30°	215096
35°	192310
40°	155763
45°	103042
50°	52084
55°	21973
60°	7083
65°	2776
70°	2324
75°	1525
80°	0
85°	0



TEST NUMBER: P856653

CATALOG NUMBER: LD6C60D010 EU6609027 6LBWLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	381.9	6.0
10°-20°	1147.7	18.1
20°-30°	1730.1	27.3
30°-40°	1770.9	27.9
40°-50°	1031.7	16.3
50°-60°	237.1	3.7
60°-70°	29.1	0.5
70°-80°	7.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3259.7	51.4
0°-40°	5030.6	79.4
0°-60°	6299.3	99.4
0°-90°	6336.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6336.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3958	
5°	3980	382
15°	4066	1148
25°	3793	1730
35°	2874	1771
45°	1329	1032
55°	230	237
65°	21	29
75°	7	8
85°	0	0
90°	0	



TEST NUMBER: P856653

CATALOG NUMBER: LD6C60D010 EU6609027 6LBWLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3958.3
2.5°	3951.0
5°	3979.7
7.5°	4008.4
10°	4044.3
12.5°	4051.5
15°	4066.0
17.5°	4051.5
20°	4015.6
22.5°	3900.7
25°	3792.9
27.5°	3620.6
30°	3398.0
32.5°	3168.1
35°	2873.6
37.5°	2542.9
40°	2176.6
42.5°	1767.2
45°	1329.1
47.5°	926.6
50°	610.7
52.5°	388.0
55°	229.9
57.5°	122.2
60°	64.6
62.5°	35.9
65°	21.4
67.5°	21.4
70°	14.5
72.5°	7.2
75°	7.2
77.5°	7.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)