

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P583007

Luminaire Tested: **LX6C70D010 EU6709050 6LBHYLI**

Issue Date: 8/31/2023

Test Information

Test Method: LM-79-08
Report Number: P583007
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2301-896-1)
Test Lab: INNOVATION CENTER
Issue Date: 8/31/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C70D010 EU6709050 6LBHYLI
Description: 6 INCH 7000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 6LCHYP TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4894.0 lumens
Efficiency: N/A
Efficacy: 62.7 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.52
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 78
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P583007

CATALOG NUMBER: LX6C70D010 EU6709050 6LBHYLI

Luminous Intensity Polar Plot

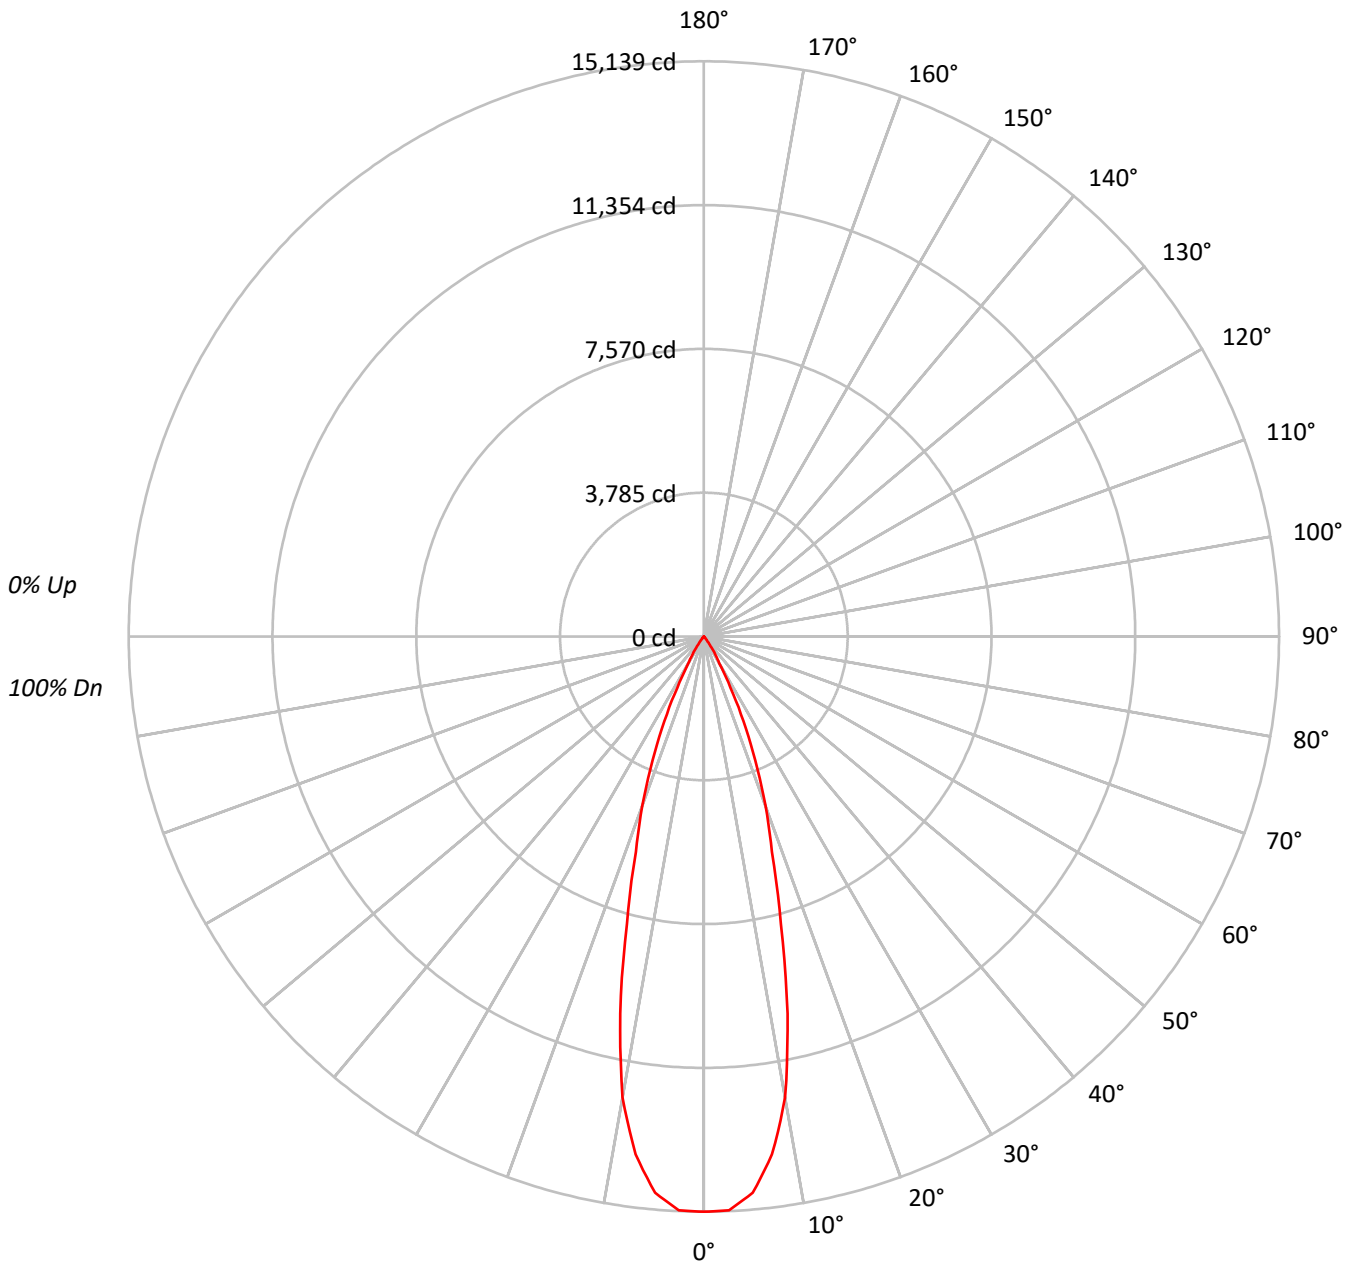



TEST NUMBER: P583007

CATALOG NUMBER: LX6C70D010 EU6709050 6LBHYLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85			
5	100	94	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79			
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	76			
8	91	83	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	74			
9	88	81	76	73	87	80	76	73	79	76	73	79	75	73	78	75	72	71			
10	85	78	74	71	84	78	73	71	77	73	70	76	73	70	76	72	70	69			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	829944
5°	808990
10°	685876
15°	444554
20°	276075
25°	148593
30°	51071
35°	20572
40°	5496
45°	2450
50°	964
55°	430
60°	252
65°	298
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P583007

CATALOG NUMBER: LX6C70D010 EU6709050 6LBHYLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1326.0	27.1
10°-20°	2186.9	44.7
20°-30°	1133.9	23.2
30°-40°	214.7	4.4
40°-50°	27.1	0.6
50°-60°	4.0	0.1
60°-70°	1.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4646.8	94.9
0°-40°	4861.5	99.3
0°-60°	4892.6	100.0
0°-90°	4894.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4894.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15139	
5°	14701	###
15°	7833	2187
25°	2457	1134
35°	307	215
45°	32	27
55°	4	4
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P583007

CATALOG NUMBER: LX6C70D010 EU6709050 6LBHYLI

CANDELA DISTRIBUTION (FULL):

0°	
0°	15139.4
2.5°	15114.6
5°	14701.0
7.5°	13751.8
10°	12321.3
12.5°	10167.5
15°	7833.0
17.5°	5948.2
20°	4732.3
22.5°	3527.8
25°	2456.6
27.5°	1509.7
30°	806.8
32.5°	544.6
35°	307.4
37.5°	133.3
40°	76.8
42.5°	49.7
45°	31.6
47.5°	18.1
50°	11.3
52.5°	4.5
55°	4.5
57.5°	2.3
60°	2.3
62.5°	2.3
65°	2.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)