

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684568

Luminaire Tested: **LX6C75D010 EX6C759030 6LBMDH**

Issue Date: 2/15/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P684568  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-21)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C75D010 EX6C759030 6LBMDH  
Description: 6 INCH 7500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 6LRMD45 TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6090.0 lumens  
Efficiency: N/A  
Efficacy: 74.7 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.8  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 81.5  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P684568

CATALOG NUMBER: LX6C75D010 EX6C759030 6LBMDH

### Luminous Intensity Polar Plot

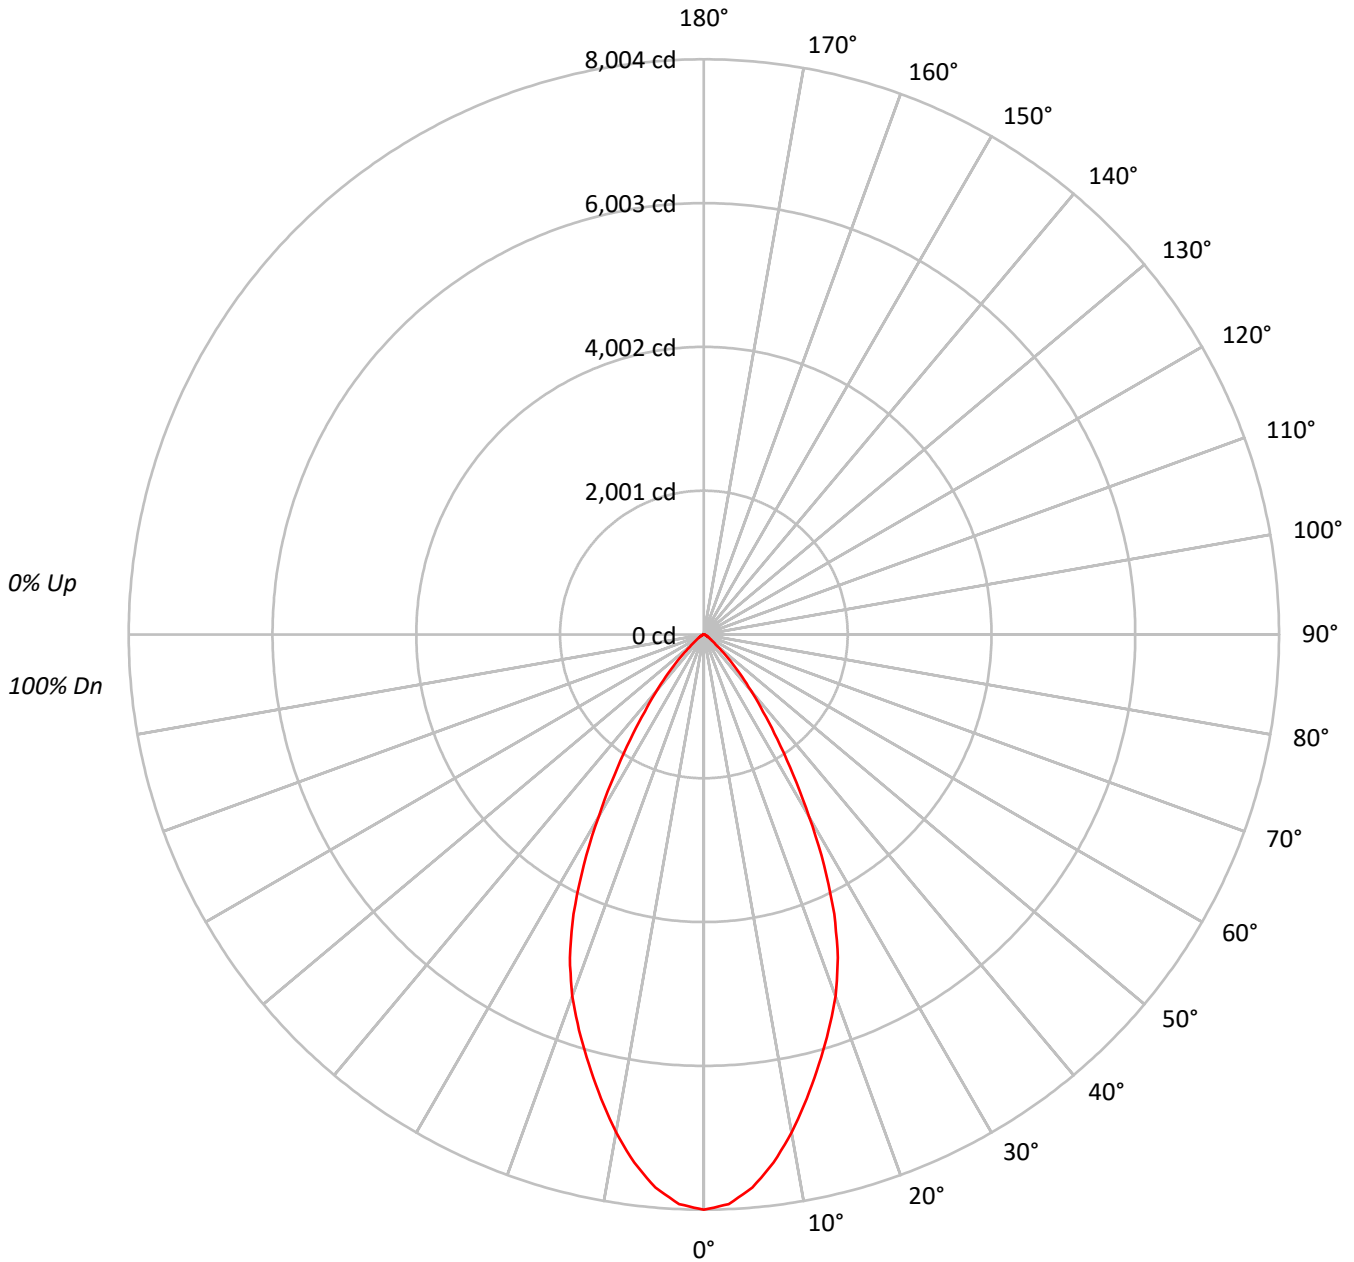



TEST NUMBER: P684568

CATALOG NUMBER: LX6C75D010 EX6C759030 6LBMDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	80	86	82	79	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	438803
5°	425225
10°	391559
15°	351200
20°	312484
25°	259497
30°	185396
35°	119170
40°	72622
45°	40369
50°	17884
55°	10360
60°	6820
65°	4838
70°	3414
75°	2626
80°	1673
85°	1132



TEST NUMBER: P684568

CATALOG NUMBER: LX6C75D010 EX6C759030 6LBMDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	715.3	11.7
10°-20°	1731.3	28.4
20°-30°	1925.4	31.6
30°-40°	1140.8	18.7
40°-50°	417.9	6.9
50°-60°	105.0	1.7
60°-70°	38.3	0.6
70°-80°	13.3	0.2
80°-90°	2.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4371.9	71.8
0°-40°	5512.7	90.5
0°-60°	6035.7	99.1
0°-90°	6090.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6090.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8004	
5°	7727	715
15°	6188	1731
25°	4290	1925
35°	1781	1141
45°	521	418
55°	108	105
65°	37	38
75°	12	13
85°	2	3
90°	0	



TEST NUMBER: P684568

CATALOG NUMBER: LX6C75D010 EX6C759030 6LBMDH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8004.4
2.5°	7933.3
5°	7727.2
7.5°	7414.4
10°	7034.1
12.5°	6614.7
15°	6188.1
17.5°	5774.1
20°	5356.4
22.5°	4871.3
25°	4290.1
27.5°	3621.9
30°	2928.8
32.5°	2308.6
35°	1780.7
37.5°	1352.4
40°	1014.8
42.5°	739.3
45°	520.7
47.5°	330.6
50°	209.7
52.5°	147.5
55°	108.4
57.5°	81.8
60°	62.2
62.5°	48.0
65°	37.3
67.5°	28.4
70°	21.3
72.5°	16.0
75°	12.4
77.5°	8.9
80°	5.3
82.5°	3.6
85°	1.8
87.5°	1.8
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)