

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684576

Luminaire Tested: **LX6C75D010 EX6C759035 6LBMH**

Issue Date: 2/15/2022

**Test Information**

Test Method: LM-79-08  
Report Number: P684576  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/15/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX6C75D010 EX6C759035 6LBMH  
Description: 6 INCH 7500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS  
AND 6LBM TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6242.0 lumens  
Efficiency: N/A  
Efficacy: 76.6 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 81.5  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P684576

CATALOG NUMBER: LX6C75D010 EX6C759035 6LBMH

### Luminous Intensity Polar Plot

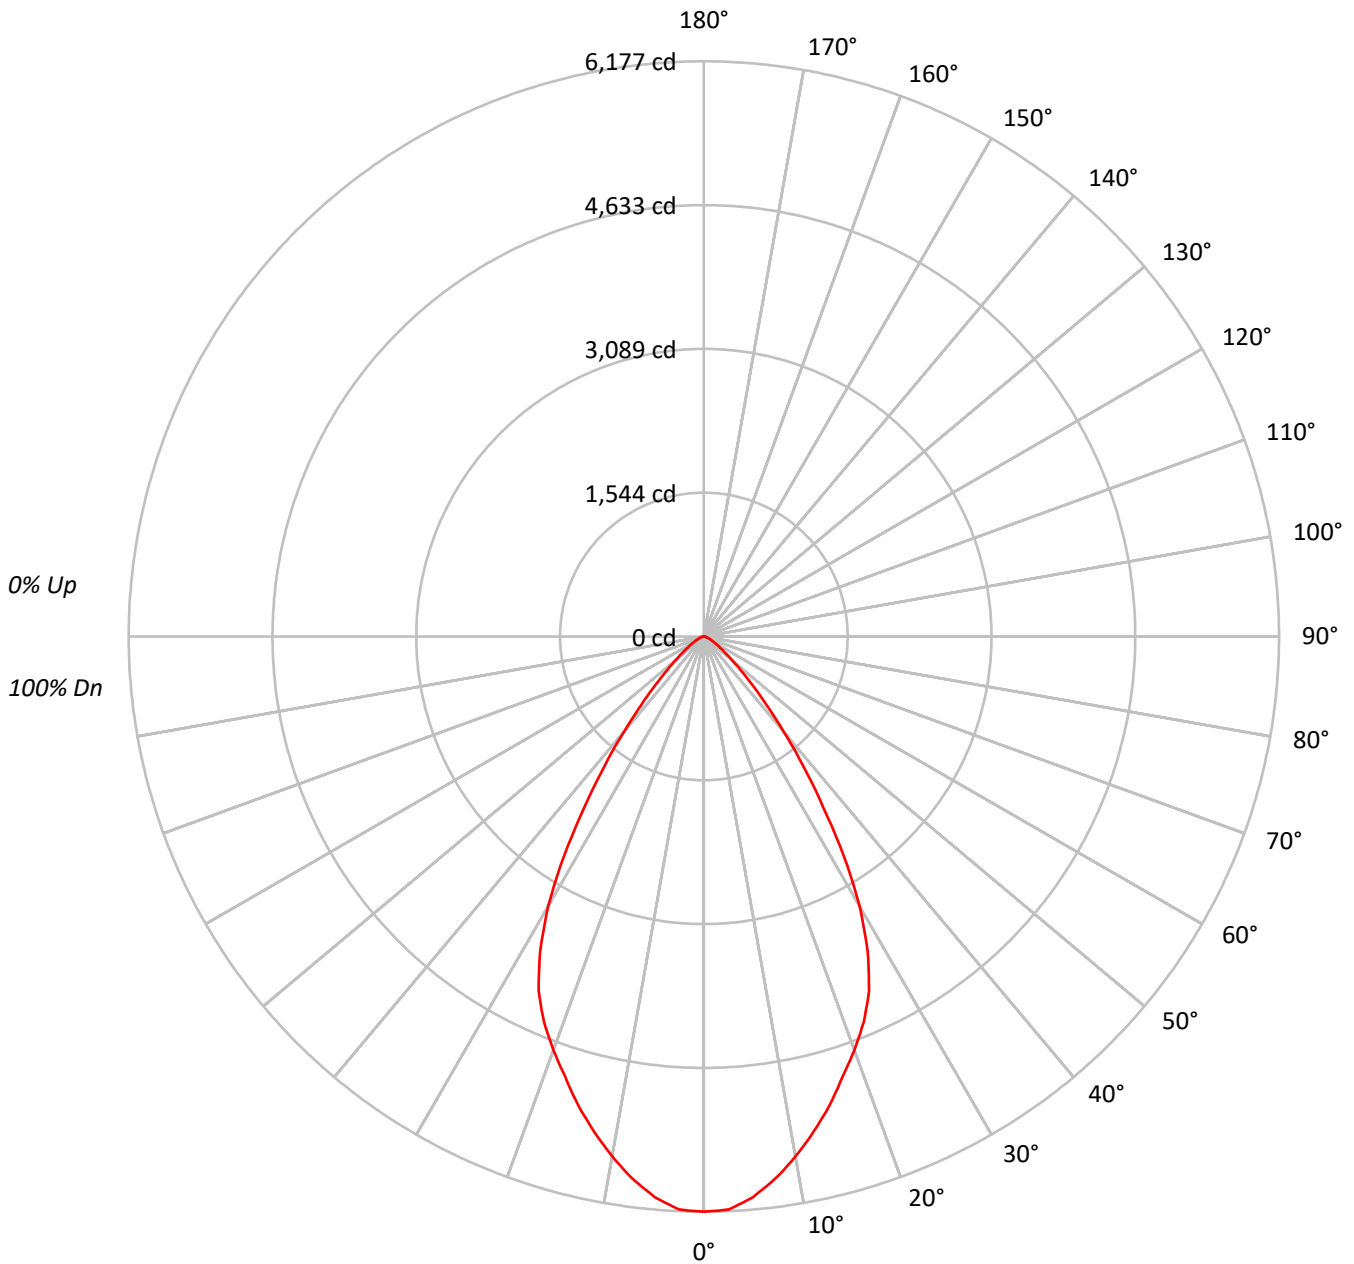



TEST NUMBER: P684576

CATALOG NUMBER: LX6C75D010 EX6C759035 6LBMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92			92																
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	88	84	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72			72																
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61			61																
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57																
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53			53																
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49			49																
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	338646
5°	332582
10°	315592
15°	295944
20°	275614
25°	253950
30°	211596
35°	149138
40°	95050
45°	56680
50°	33457
55°	21285
60°	14659
65°	10403
70°	7165
75°	5655
80°	2778
85°	0



TEST NUMBER: P684576

CATALOG NUMBER: LX6C75D010 EX6C759035 6LBMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	564.8	9.0
10°-20°	1461.2	23.4
20°-30°	1893.3	30.3
30°-40°	1405.6	22.5
40°-50°	593.4	9.5
50°-60°	210.7	3.4
60°-70°	81.3	1.3
70°-80°	28.1	0.5
80°-90°	3.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3919.3	62.8
0°-40°	5324.9	85.3
0°-60°	6128.9	98.2
0°-90°	6242.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6242.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6177	
5°	6044	565
15°	5214	1461
25°	4198	1893
35°	2228	1406
45°	731	593
55°	223	211
65°	80	81
75°	27	28
85°	0	4
90°	0	



TEST NUMBER: P684576

CATALOG NUMBER: LX6C75D010 EX6C759035 6LBMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6177.4
2.5°	6159.5
5°	6043.7
7.5°	5874.1
10°	5669.4
12.5°	5446.3
15°	5214.5
17.5°	4956.2
20°	4724.4
22.5°	4483.7
25°	4198.4
27.5°	3806.1
30°	3342.7
32.5°	2798.8
35°	2228.5
37.5°	1747.2
40°	1328.2
42.5°	989.3
45°	731.1
47.5°	534.8
50°	392.3
52.5°	294.1
55°	222.7
57.5°	169.2
60°	133.7
62.5°	98.2
65°	80.2
67.5°	62.3
70°	44.7
72.5°	35.5
75°	26.7
77.5°	17.9
80°	8.8
82.5°	8.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)