

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P685227

Luminaire Tested: **LX6C08D010 EX6089040 6LBMLI**

Issue Date: 2/15/2022

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



Test Information

Test Method: LM-79-08
Report Number: P685227
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C08D010 EX6089040 6LBMLI
Description: 6 INCH 800 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS AND 6LBM TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Luminaire Equipment: Sample No. Condition Description

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 817.1 lumens
Efficiency: N/A
Efficacy: 82.5 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P685227

CATALOG NUMBER: LX6C08D010 EX6089040 6LBMLI

Luminous Intensity Polar Plot

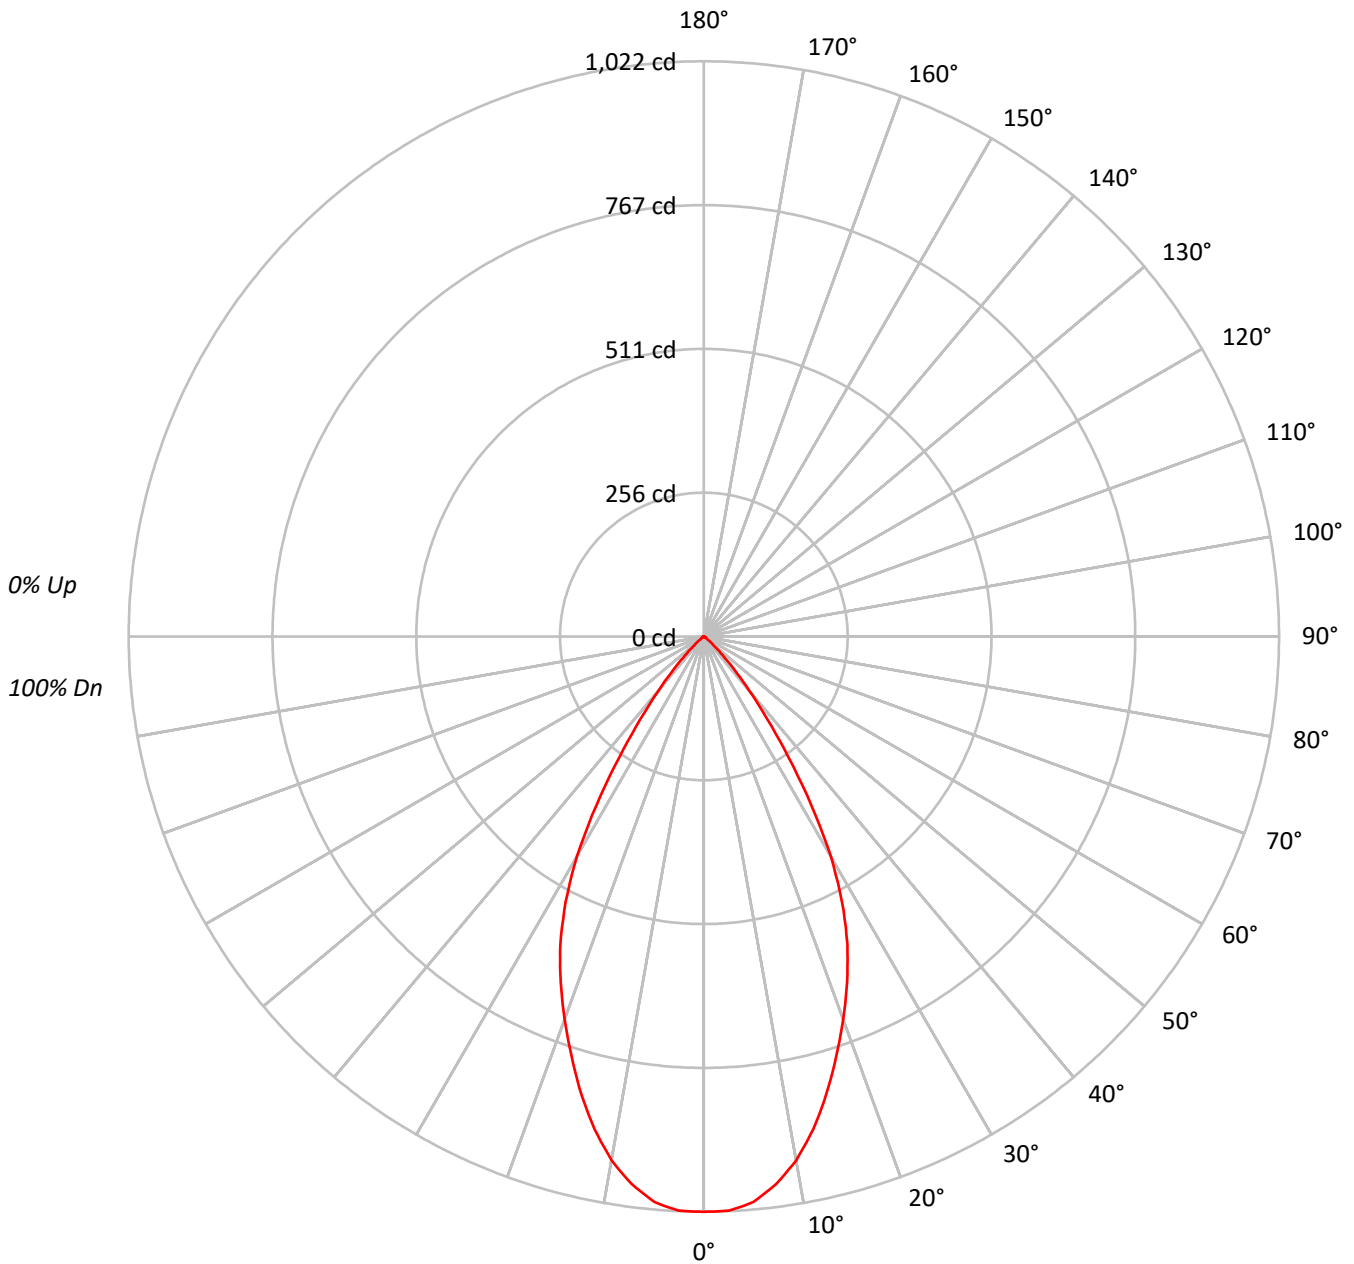



TEST NUMBER: P685227

CATALOG NUMBER: LX6C08D010 EX6089040 6LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	56048
5°	55519
10°	52610
15°	47764
20°	42208
25°	36486
30°	28523
35°	17494
40°	8981
45°	3566
50°	1160
55°	401
60°	340
65°	272
70°	176
75°	233
80°	0
85°	0



TEST NUMBER: P685227

CATALOG NUMBER: LX6C08D010 EX6089040 6LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.2	11.5
10°-20°	234.5	28.7
20°-30°	272.6	33.4
30°-40°	166.9	20.4
40°-50°	41.4	5.1
50°-60°	4.8	0.6
60°-70°	1.8	0.2
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	601.3	73.6
0°-40°	768.2	94.0
0°-60°	814.5	99.7
0°-90°	817.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	817.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1022	
5°	1009	94
15°	842	235
25°	603	273
35°	261	167
45°	46	41
55°	4	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P685227

CATALOG NUMBER: LX6C08D010 EX6089040 6LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1022.4
2.5°	1021.4
5°	1008.9
7.5°	981.7
10°	945.1
12.5°	897.0
15°	841.6
17.5°	782.0
20°	723.5
22.5°	664.9
25°	603.2
27.5°	532.1
30°	450.6
32.5°	355.4
35°	261.4
37.5°	184.0
40°	125.5
42.5°	78.4
45°	46.0
47.5°	26.1
50°	13.6
52.5°	6.3
55°	4.2
57.5°	3.1
60°	3.1
62.5°	2.1
65°	2.1
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)