

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P684649

Luminaire Tested: **LX6C80D010 EX6C809030 6LBSH**

Issue Date: 2/15/2022

Test Information

Test Method: LM-79-08
Report Number: P684649
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P204188)
Test Lab: INNOVATION CENTER
Issue Date: 2/15/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C80D010 EX6C809030 6LBSH
Description: 6 INCH 8000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 6LBS TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9473.0 lumens
Efficiency: N/A
Efficacy: 105.8 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 89.5
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P684649

CATALOG NUMBER: LX6C80D010 EX6C809030 6LBSH

Luminous Intensity Polar Plot

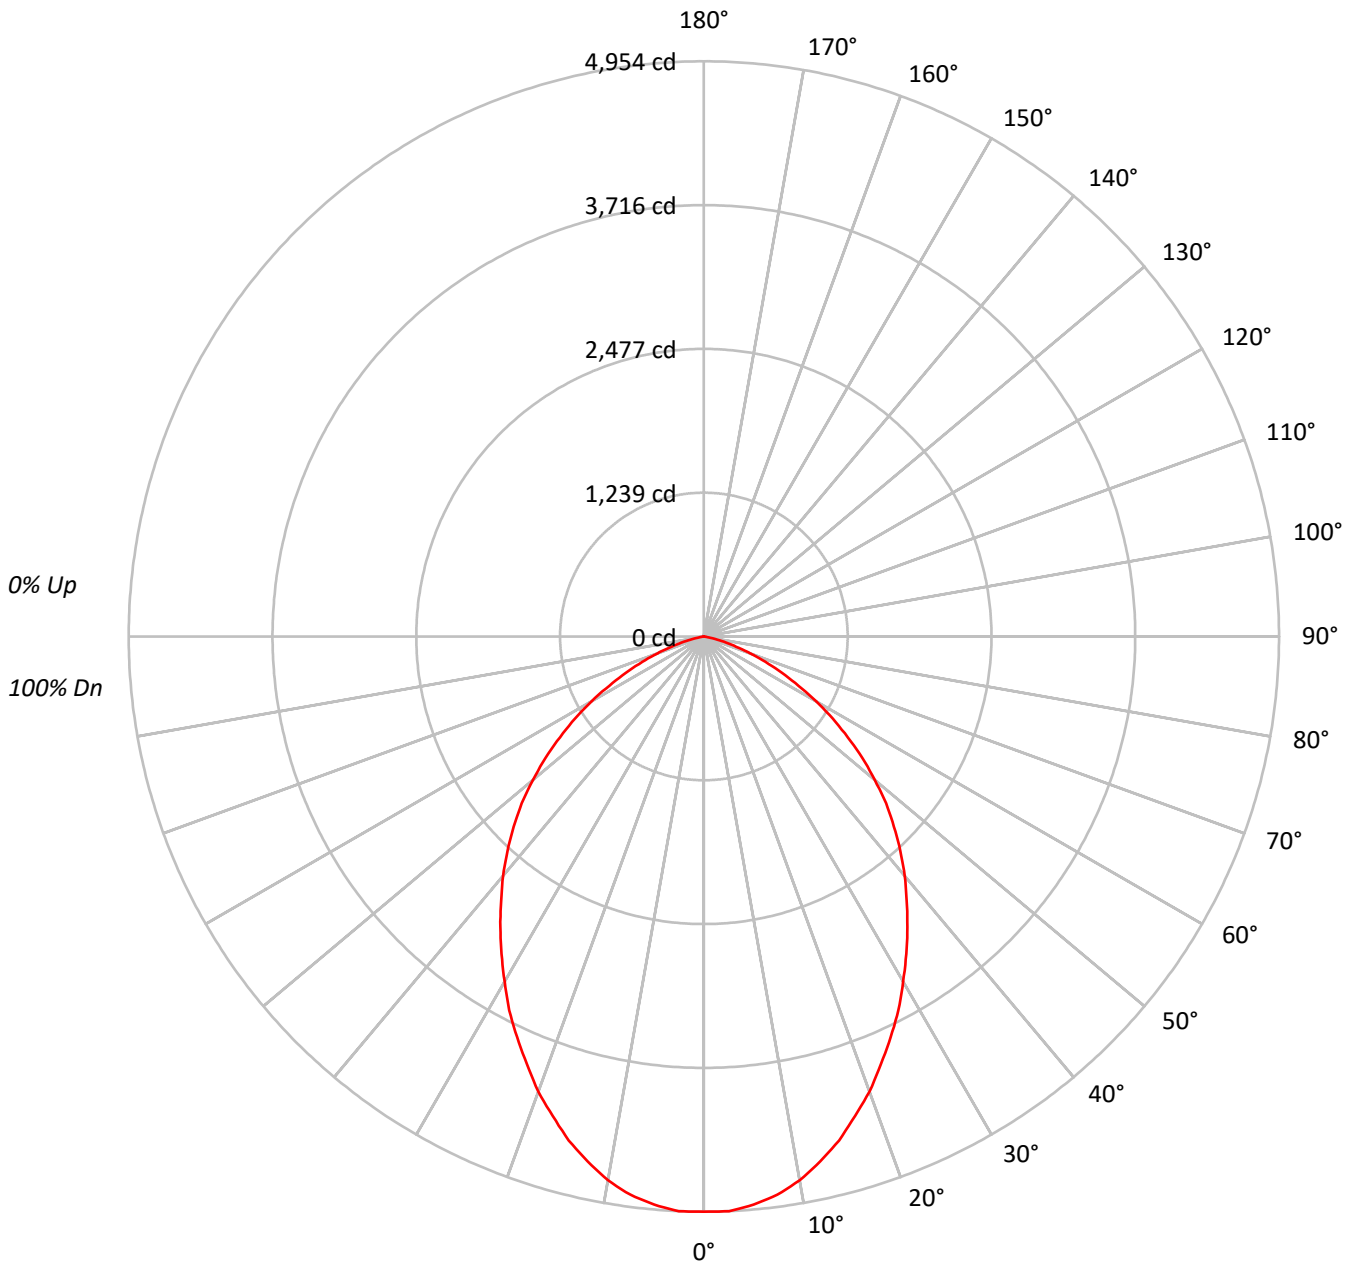



TEST NUMBER: P684649

CATALOG NUMBER: LX6C80D010 EX6C809030 6LBSH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	271601
5°	270333
10°	264752
15°	255126
20°	243394
25°	230275
30°	217211
35°	204524
40°	192575
45°	179515
50°	163679
55°	144559
60°	122359
65°	96067
70°	68553
75°	37554
80°	6598
85°	0



TEST NUMBER: P684649

CATALOG NUMBER: LX6C80D010 EX6C809030 6LBSH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	464.1	4.9
10°-20°	1261.3	13.3
20°-30°	1751.7	18.5
30°-40°	1911.5	20.2
40°-50°	1783.1	18.8
50°-60°	1353.5	14.3
60°-70°	741.1	7.8
70°-80°	203.9	2.2
80°-90°	2.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3477.0	36.7
0°-40°	5388.5	56.9
0°-60°	8525.1	90.0
0°-90°	9473.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9473.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4954	
5°	4912	464
15°	4495	1261
25°	3807	1752
35°	3056	1911
45°	2316	1783
55°	1512	1353
65°	741	741
75°	177	204
85°	0	3
90°	0	



TEST NUMBER: P684649

CATALOG NUMBER: LX6C80D010 EX6C809030 6LBSH

CANDELA DISTRIBUTION (FULL):

	0°
0°	4954.4
2.5°	4954.4
5°	4912.5
7.5°	4849.9
10°	4756.1
12.5°	4631.0
15°	4495.3
17.5°	4328.5
20°	4172.1
22.5°	3984.3
25°	3807.0
27.5°	3629.7
30°	3431.4
32.5°	3243.7
35°	3056.1
37.5°	2868.3
40°	2691.0
42.5°	2503.3
45°	2315.5
47.5°	2127.7
50°	1919.2
52.5°	1721.0
55°	1512.5
57.5°	1314.2
60°	1116.0
62.5°	918.0
65°	740.6
67.5°	573.6
70°	427.7
72.5°	292.0
75°	177.3
77.5°	83.5
80°	20.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)