

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P136005

Luminaire Tested: **LD6A10D010TE ERW6A10930 6LW1LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P136005  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P23358)  
Test Lab: INNOVATION CENTER P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6A10D010TE ERW6A10930 6LW1LI  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM  
Light Source: (1) HIGH LUMEN LED 3000K  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1131.0 lumens  
Efficiency: N/A  
Efficacy: 80.8 lumens/watt  
Spacing Criteria (0/90/45): 1.22 / 1.22 / 1.12  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 14  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P136005

CATALOG NUMBER: LD6A10D010TE ERW6A10930 6LW1LI

### Luminous Intensity Polar Plot

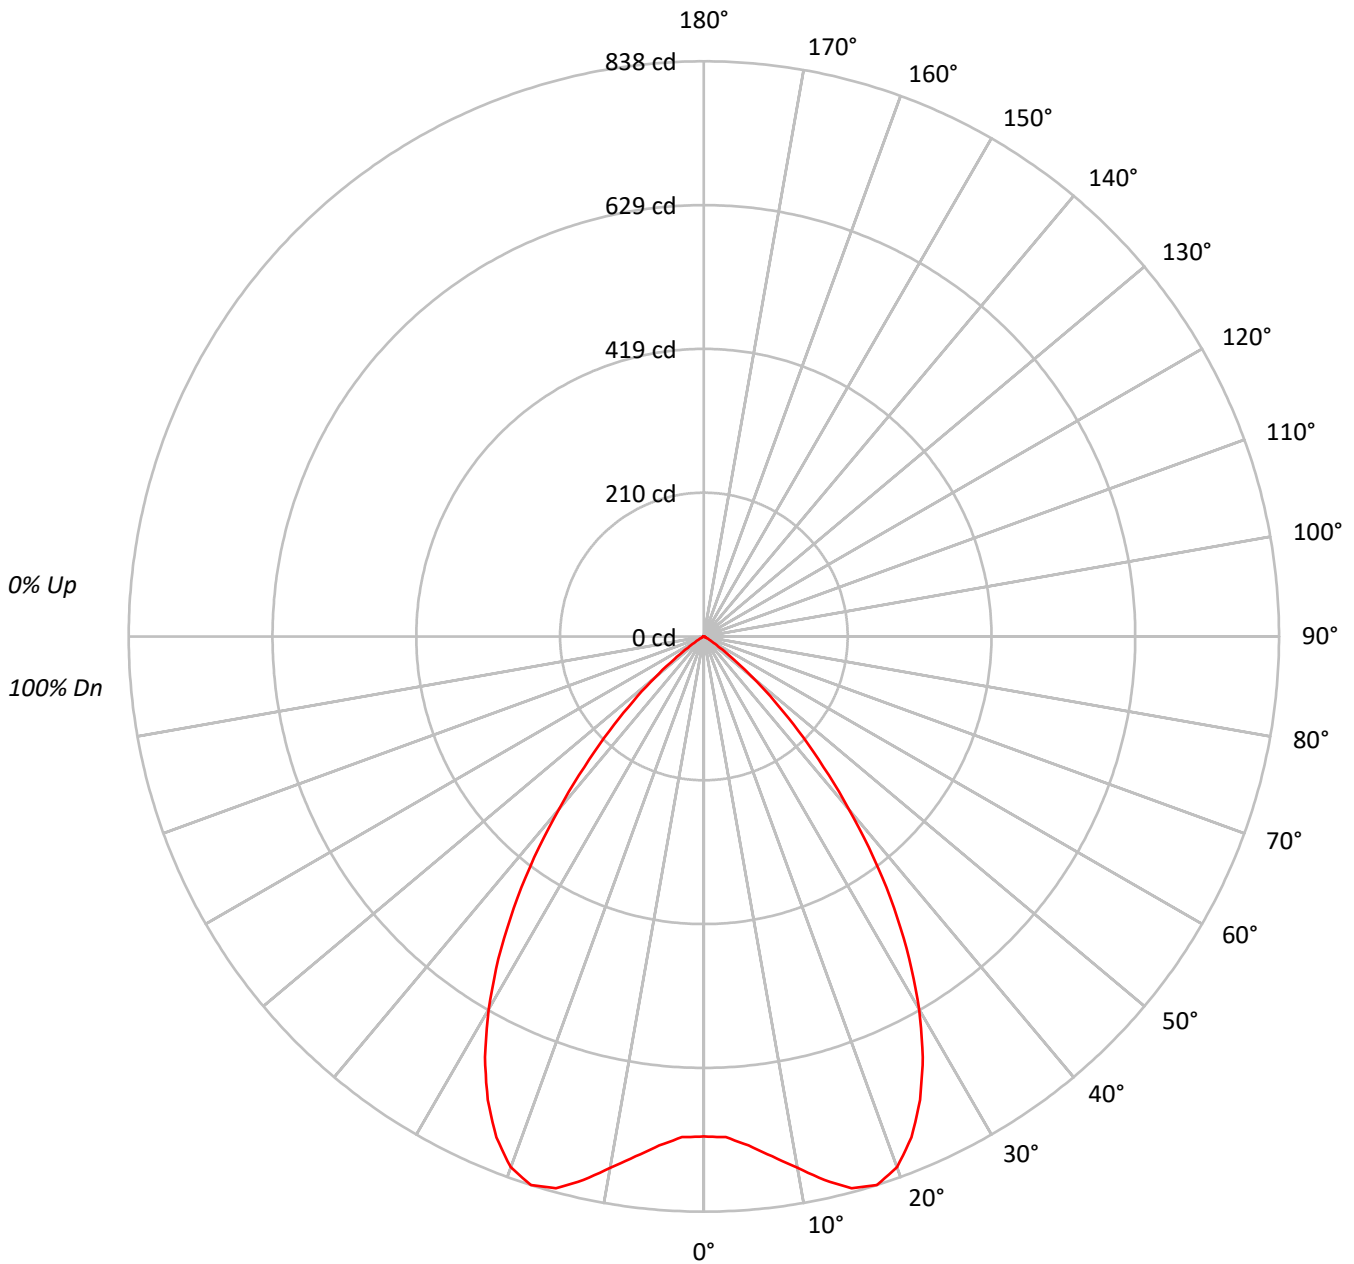



TEST NUMBER: P136005

CATALOG NUMBER: LD6A10D010TE ERW6A10930 6LW1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65	65	65	65
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	68	62	57	77	68	61	57	66	61	57	65	60	56	64	59	56	54	54	54	54
8	74	64	57	53	73	63	57	52	62	56	52	61	56	52	60	55	52	50	50	50	50
9	70	60	53	49	69	59	53	48	58	52	48	57	52	48	56	51	48	46	46	46	46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	44	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	47521
5°	48738
10°	52064
15°	56215
20°	57125
25°	53629
30°	47234
35°	38476
40°	27934
45°	17927
50°	9419
55°	3219
60°	926
65°	247
70°	153
75°	202
80°	0
85°	0



TEST NUMBER: P136005

CATALOG NUMBER: LD6A10D010TE ERW6A10930 6LW1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	72.4	6.4
10°-20°	233.5	20.6
20°-30°	338.7	30.0
30°-40°	298.4	26.4
40°-50°	152.8	13.5
50°-60°	32.2	2.8
60°-70°	2.5	0.2
70°-80°	0.5	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	644.6	57.0
0°-40°	943.0	83.4
0°-60°	1128.0	99.7
0°-90°	1131.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1131.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	728	
5°	744	72
15°	832	233
25°	745	339
35°	483	298
45°	194	153
55°	28	32
65°	2	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P136005

CATALOG NUMBER: LD6A10D010TE ERW6A10930 6LW1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	728.4
2.5°	730.0
5°	744.2
7.5°	763.9
10°	785.9
12.5°	811.1
15°	832.3
17.5°	837.8
20°	822.8
22.5°	789.8
25°	745.0
27.5°	690.7
30°	627.0
32.5°	557.0
35°	483.1
37.5°	405.9
40°	328.0
42.5°	258.0
45°	194.3
47.5°	139.3
50°	92.8
52.5°	54.3
55°	28.3
57.5°	14.1
60°	7.1
62.5°	3.1
65°	1.6
67.5°	1.6
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)