

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P135197

Luminaire Tested: **LD6A15D010TE ERN6A15930 6LN1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P135197
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P23370)
Test Lab: INNOVATION CENTER P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6A15D010TE ERN6A15930 6LN1H
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
Light Source: (1) HIGH LUMEN LED 3000K
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1209.3 lumens
Efficiency: N/A
Efficacy: 53.5 lumens/watt
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.84
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 22.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P135197

CATALOG NUMBER: LD6A15D010TE ERN6A15930 6LN1H

Luminous Intensity Polar Plot

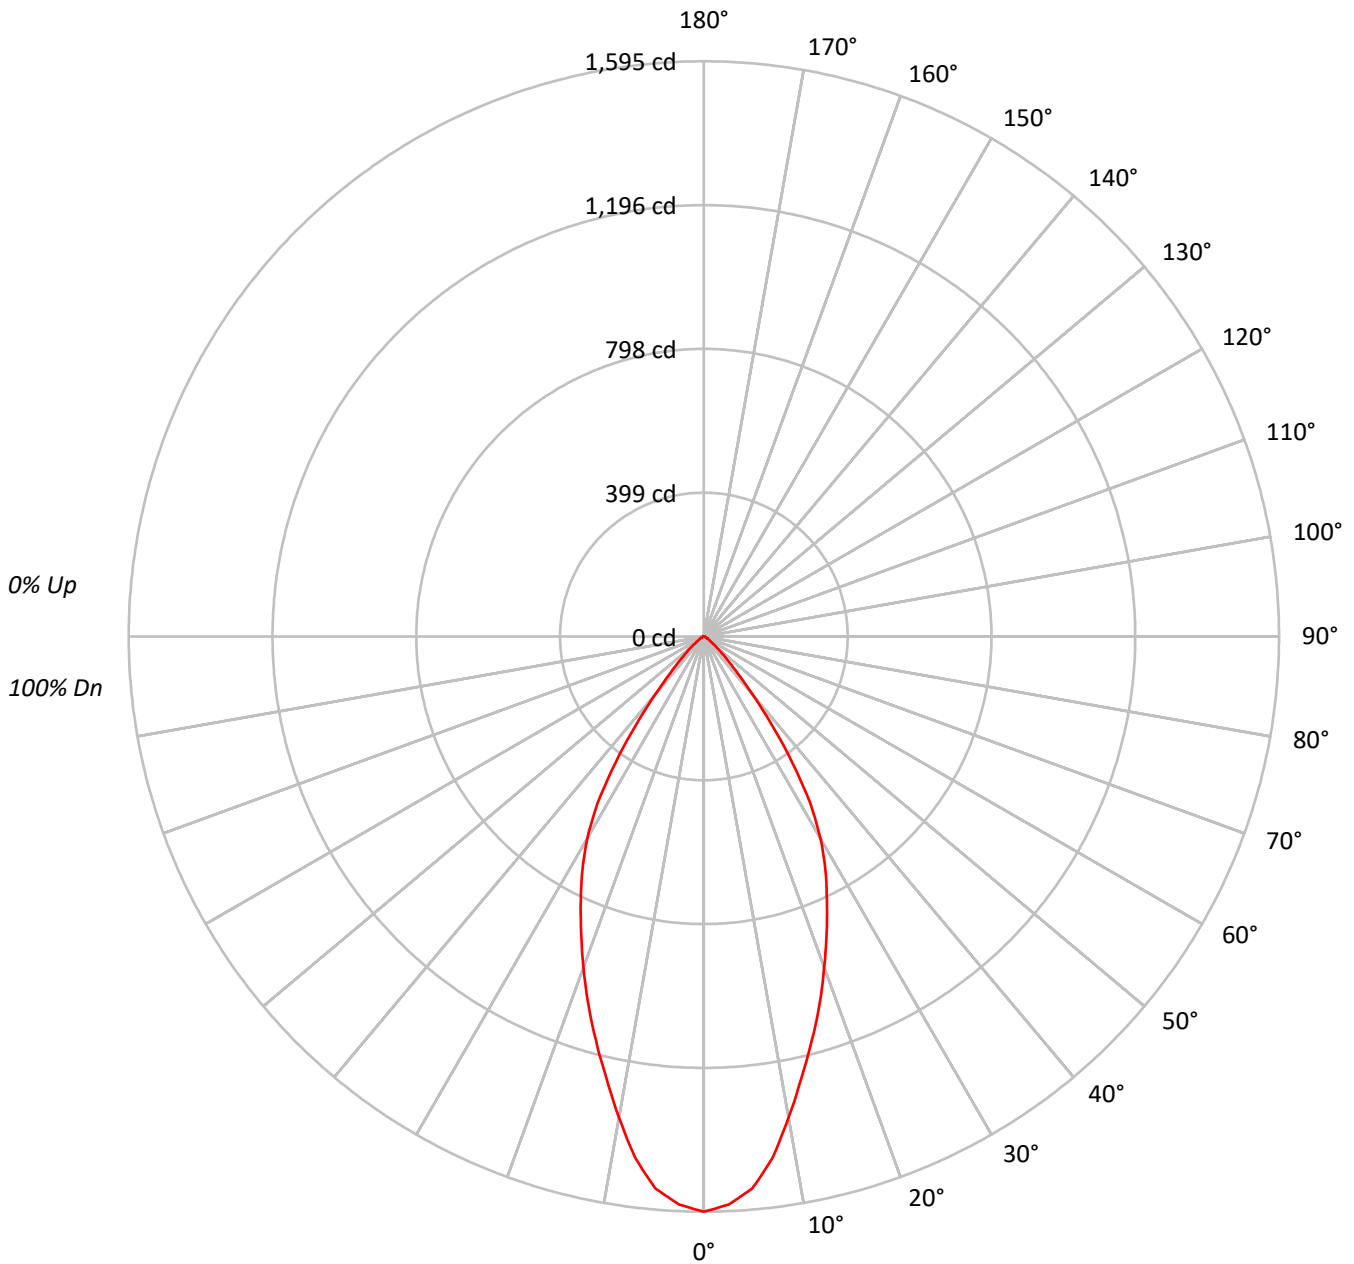



TEST NUMBER: P135197

CATALOG NUMBER: LD6A15D010TE ERN6A15930 6LN1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70			
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65			
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	66	60	56	74	65	59	56	64	59	55	63	59	55	62	58	55	54			
10	72	62	56	52	71	62	56	52	61	56	52	60	55	52	59	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	104059
5°	100658
10°	89738
15°	78220
20°	67734
25°	58114
30°	48786
35°	34231
40°	17825
45°	8479
50°	4446
55°	2411
60°	1657
65°	1096
70°	801
75°	731
80°	526
85°	0



TEST NUMBER: P135197

CATALOG NUMBER: LD6A15D010TE ERN6A15930 6LN1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.7	11.6
10°-20°	323.6	26.8
20°-30°	370.3	30.6
30°-40°	263.8	21.8
40°-50°	79.8	6.6
50°-60°	20.7	1.7
60°-70°	7.7	0.6
70°-80°	2.6	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	834.6	69.0
0°-40°	1098.4	90.8
0°-60°	1198.8	99.1
0°-90°	1209.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1209.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1595	
5°	1537	141
15°	1158	324
25°	807	370
35°	430	264
45°	92	80
55°	21	21
65°	7	8
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P135197

CATALOG NUMBER: LD6A15D010TE ERN6A15930 6LN1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	1595.0
2.5°	1576.6
5°	1537.0
7.5°	1457.9
10°	1354.6
12.5°	1251.4
15°	1158.1
17.5°	1067.5
20°	975.6
22.5°	889.4
25°	807.3
27.5°	729.6
30°	647.6
32.5°	548.6
35°	429.8
37.5°	308.3
40°	209.3
42.5°	138.6
45°	91.9
47.5°	63.6
50°	43.8
52.5°	28.3
55°	21.2
57.5°	15.6
60°	12.7
62.5°	9.9
65°	7.1
67.5°	5.6
70°	4.2
72.5°	2.9
75°	2.9
77.5°	1.4
80°	1.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)