

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P133528

Luminaire Tested: **LD6A30D010TE ERN6A30827 6LN1LI**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P133528
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P23397)
Test Lab: INNOVATION CENTER P2
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD6A30D010TE ERN6A30827 6LN1LI
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
NARROW DISTRIBUTION WITH SPECULAR CLEAR TRIM
Light Source: (1) HIGH LUMEN LED 2700K
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2683.0 lumens
Efficiency: N/A
Efficacy: 59.1 lumens/watt
Spacing Criteria (0/90/45): 0.41 / 0.41 / 0.49
Luminous Opening: Circular (Dia: 0.46' x H: 0')
CIE Type: Direct


Input Watts (W): 45.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P133528

CATALOG NUMBER: LD6A30D010TE ERN6A30827 6LN1LI

Luminous Intensity Polar Plot

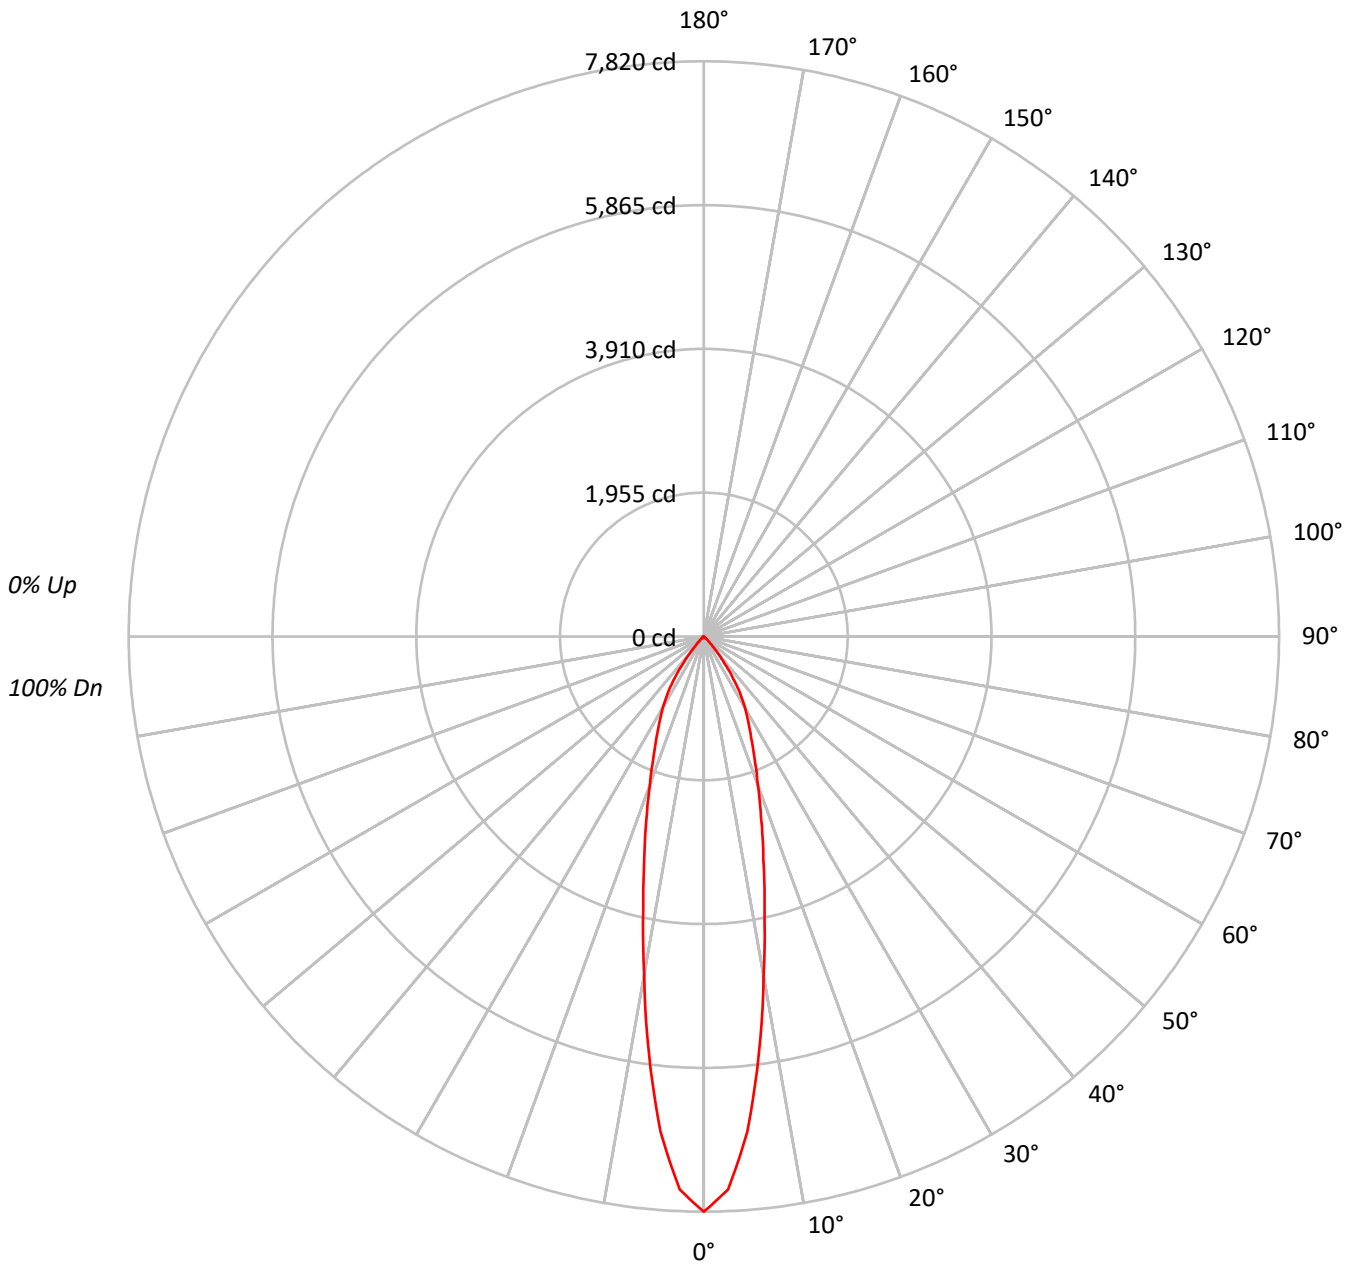



TEST NUMBER: P133528

CATALOG NUMBER: LD6A30D010TE ERN6A30827 6LN1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95			
2	109	105	102	99	107	103	100	97	100	98	95	97	95	93	95	93	91	90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	87	85			
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76			
6	92	85	79	76	91	84	79	75	82	78	75	81	77	74	80	77	74	73			
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	70	69			
8	85	77	72	68	84	76	71	68	75	71	68	74	70	68	74	70	67	66			
9	82	74	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63			
10	79	70	65	62	78	70	65	62	69	65	62	69	65	62	68	64	62	60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	510169
5°	442816
10°	309851
15°	211116
20°	148901
25°	109655
30°	84117
35°	55034
40°	23897
45°	7639
50°	2294
55°	637
60°	496
65°	293
70°	362
75°	0
80°	0
85°	0



TEST NUMBER: P133528

CATALOG NUMBER: LD6A30D010TE ERN6A30827 6LN1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	577.2	21.5
10°-20°	880.3	32.8
20°-30°	710.1	26.5
30°-40°	425.0	15.8
40°-50°	81.4	3.0
50°-60°	6.6	0.2
60°-70°	2.1	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2167.6	80.8
0°-40°	2592.6	96.6
0°-60°	2680.7	99.9
0°-90°	2683.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2683.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7820	
5°	6762	577
15°	3126	880
25°	1523	710
35°	691	425
45°	83	81
55°	6	7
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P133528

CATALOG NUMBER: LD6A30D010TE ERN6A30827 6LN1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	7819.8
2.5°	7528.0
5°	6761.6
7.5°	5724.1
10°	4677.2
12.5°	3801.7
15°	3125.7
17.5°	2590.9
20°	2144.7
22.5°	1798.2
25°	1523.3
27.5°	1303.0
30°	1116.6
32.5°	918.9
35°	691.0
37.5°	465.1
40°	280.6
42.5°	156.3
45°	82.8
47.5°	43.3
50°	22.6
52.5°	7.5
55°	5.6
57.5°	3.8
60°	3.8
62.5°	1.9
65°	1.9
67.5°	1.9
70°	1.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)