

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P135373

Luminaire Tested: **LD6A30D010TE ERM6A30930 6LM1LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P135373  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P23398)  
Test Lab: INNOVATION CENTER P2  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD6A30D010TE ERM6A30930 6LM1LI  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM  
Light Source: (1) HIGH LUMEN LED 3000K  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2682.4 lumens  
Efficiency: N/A  
Efficacy: 59.1 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.8  
Luminous Opening: Circular (Dia: 0.46' x H: 0')  
CIE Type: Direct


Input Watts (W): 45.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P135373

CATALOG NUMBER: LD6A30D010TE ERM6A30930 6LM1LI

### Luminous Intensity Polar Plot

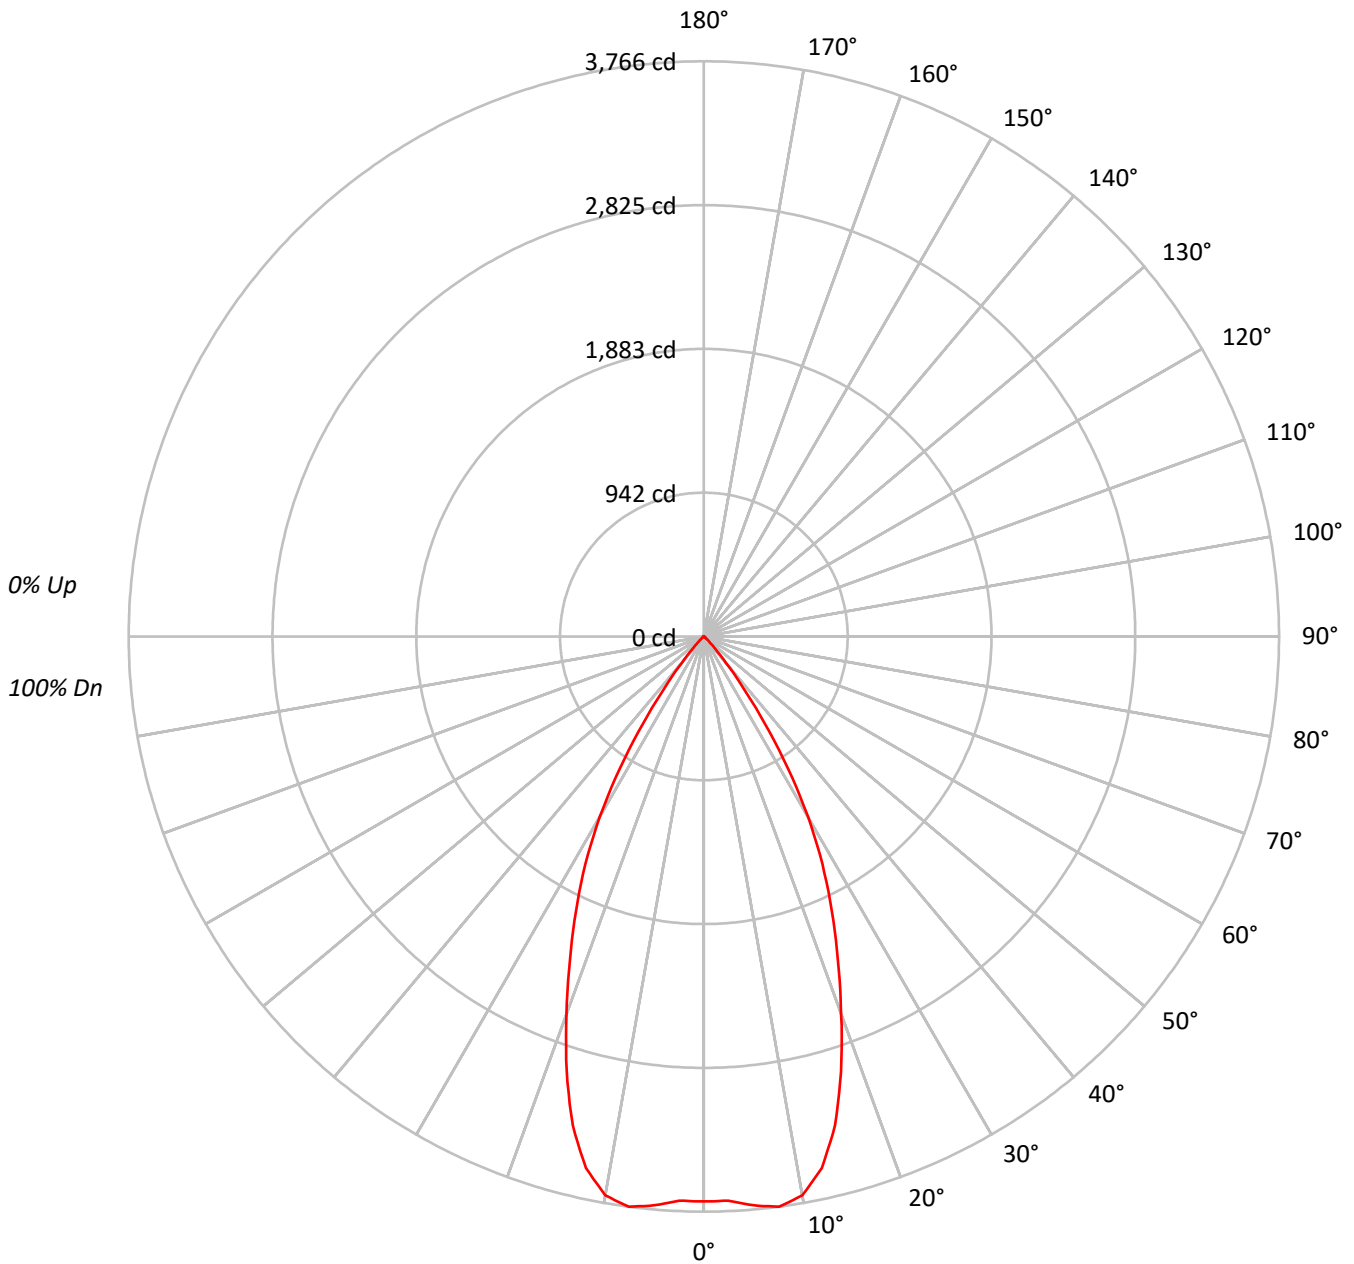



TEST NUMBER: P135373

CATALOG NUMBER: LD6A30D010TE ERM6A30930 6LM1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94			
2	109	104	101	98	107	103	99	96	99	97	94	97	94	92	94	92	90	89			
3	104	98	93	90	102	97	93	89	94	91	88	92	89	86	90	87	85	84			
4	99	92	87	83	98	91	87	83	89	85	82	87	84	81	85	82	80	79			
5	95	87	82	78	93	86	81	77	84	80	77	83	79	76	81	78	75	74			
6	91	82	77	73	89	82	76	73	80	76	72	79	75	72	78	74	71	70			
7	87	78	72	69	85	77	72	68	76	71	68	75	71	68	74	70	67	66			
8	83	74	69	65	82	73	68	65	72	68	64	71	67	64	70	67	64	63			
9	79	70	65	61	78	70	65	61	69	64	61	68	64	61	67	63	61	59			
10	76	67	62	58	75	67	61	58	66	61	58	65	61	58	64	60	57	56			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	241332
5°	244853
10°	246134
15°	223942
20°	182477
25°	142581
30°	102740
35°	54883
40°	19103
45°	5176
50°	1654
55°	819
60°	483
65°	278
70°	343
75°	454
80°	0
85°	0



TEST NUMBER: P135373

CATALOG NUMBER: LD6A30D010TE ERM6A30930 6LM1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	356.8	13.3
10°-20°	908.1	33.9
20°-30°	902.7	33.7
30°-40°	444.4	16.6
40°-50°	59.7	2.2
50°-60°	7.0	0.3
60°-70°	2.5	0.1
70°-80°	1.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2167.6	80.8
0°-40°	2612.0	97.4
0°-60°	2678.7	99.9
0°-90°	2682.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2682.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3699	
5°	3739	357
15°	3316	908
25°	1981	903
35°	689	444
45°	56	60
55°	7	7
65°	2	2
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P135373

CATALOG NUMBER: LD6A30D010TE ERM6A30930 6LM1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3699.1
2.5°	3697.3
5°	3738.8
7.5°	3766.0
10°	3715.4
12.5°	3565.2
15°	3315.6
17.5°	2988.2
20°	2628.3
22.5°	2290.0
25°	1980.7
27.5°	1680.4
30°	1363.8
32.5°	1023.8
35°	689.1
37.5°	414.2
40°	224.3
42.5°	115.8
45°	56.1
47.5°	27.1
50°	16.3
52.5°	9.0
55°	7.2
57.5°	5.4
60°	3.7
62.5°	3.7
65°	1.8
67.5°	1.8
70°	1.8
72.5°	1.8
75°	1.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)