

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P#

Luminaire Tested: **LX6C10D010 EX6C109035 6LBSQH**

Issue Date: 2/16/2022



Test Information

Test Method: LM-79-08
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203254)
Test Lab: INNOVATION CENTER
Issue Date: 2/16/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX6C10D010 EX6C109035 6LBSQH
Description: 6 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 6LBSQ TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 641.0 lumens
Efficiency: N/A
Efficacy: 65.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Rectangular (W 0.5' x L: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P#
CATALOG NUMBER: LX6C10D010 EX6C109035 6LBSQH

Luminous Intensity Polar Plot

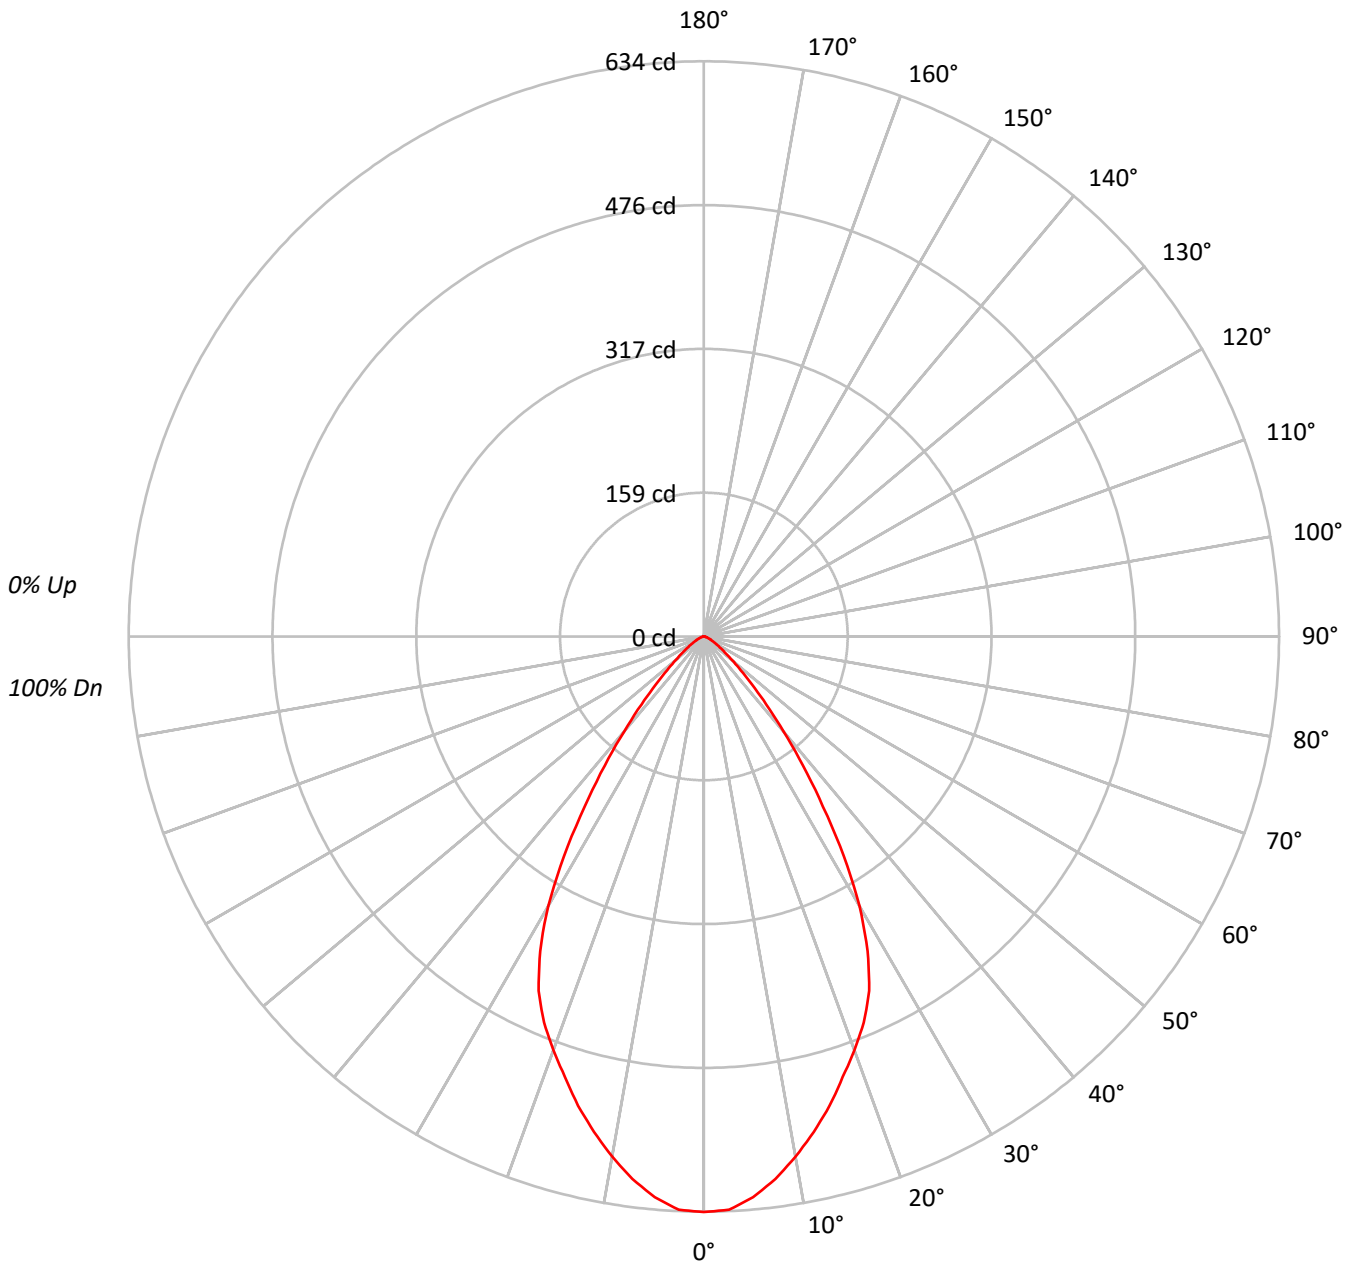



TEST NUMBER: P#

CATALOG NUMBER: LX6C10D010 EX6C109035 6LBSQH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | 100 |
| 1 | 113 | 110 | 107 | 105 | 111 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 99 | 97 | 97 | 95 | 94 | 92 | | | 92 |
| 2 | 107 | 102 | 97 | 93 | 105 | 100 | 96 | 92 | 97 | 93 | 90 | 94 | 91 | 88 | 91 | 89 | 87 | 85 | | | 85 |
| 3 | 101 | 94 | 88 | 84 | 99 | 92 | 88 | 84 | 90 | 86 | 82 | 87 | 84 | 81 | 85 | 82 | 80 | 78 | | | 78 |
| 4 | 95 | 87 | 81 | 76 | 93 | 86 | 80 | 76 | 84 | 79 | 75 | 82 | 78 | 74 | 80 | 76 | 73 | 72 | | | 72 |
| 5 | 90 | 81 | 75 | 70 | 88 | 80 | 74 | 70 | 78 | 73 | 69 | 76 | 72 | 68 | 75 | 71 | 68 | 66 | | | 66 |
| 6 | 85 | 75 | 69 | 64 | 83 | 75 | 69 | 64 | 73 | 68 | 64 | 72 | 67 | 63 | 70 | 66 | 63 | 61 | | | 61 |
| 7 | 80 | 70 | 64 | 59 | 79 | 70 | 64 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 66 | 62 | 58 | 57 | | | 57 |
| 8 | 76 | 66 | 60 | 55 | 75 | 65 | 59 | 55 | 64 | 59 | 55 | 63 | 58 | 55 | 62 | 58 | 54 | 53 | | | 53 |
| 9 | 72 | 62 | 56 | 51 | 71 | 61 | 55 | 51 | 60 | 55 | 51 | 60 | 55 | 51 | 59 | 54 | 51 | 49 | | | 49 |
| 10 | 69 | 58 | 52 | 48 | 68 | 58 | 52 | 48 | 57 | 52 | 48 | 56 | 51 | 48 | 55 | 51 | 48 | 46 | | | 46 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 27315 |
| 5° | 26822 |
| 10° | 25454 |
| 15° | 23870 |
| 20° | 22231 |
| 25° | 20480 |
| 30° | 17068 |
| 35° | 12026 |
| 40° | 7666 |
| 45° | 4573 |
| 50° | 2699 |
| 55° | 1719 |
| 60° | 1180 |
| 65° | 835 |
| 70° | 579 |
| 75° | 449 |
| 80° | 223 |
| 85° | 0 |



TEST NUMBER: P#

CATALOG NUMBER: LX6C10D010 EX6C109035 6LBSQH

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 58.0 | 9.0 |
| 10°-20° | 150.1 | 23.4 |
| 20°-30° | 194.4 | 30.3 |
| 30°-40° | 144.3 | 22.5 |
| 40°-50° | 60.9 | 9.5 |
| 50°-60° | 21.6 | 3.4 |
| 60°-70° | 8.3 | 1.3 |
| 70°-80° | 2.9 | 0.4 |
| 80°-90° | 0.4 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 402.5 | 62.8 |
| 0°-40° | 546.8 | 85.3 |
| 0°-60° | 629.4 | 98.2 |
| 0°-90° | 641.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 641.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 634 | |
| 5° | 621 | 58 |
| 15° | 536 | 150 |
| 25° | 431 | 194 |
| 35° | 229 | 144 |
| 45° | 75 | 61 |
| 55° | 23 | 22 |
| 65° | 8 | 8 |
| 75° | 3 | 3 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P#

CATALOG NUMBER: LX6C10D010 EX6C109035 6LBSQH

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 634.4 |
| 2.5° | 632.5 |
| 5° | 620.6 |
| 7.5° | 603.2 |
| 10° | 582.2 |
| 12.5° | 559.3 |
| 15° | 535.5 |
| 17.5° | 509.0 |
| 20° | 485.2 |
| 22.5° | 460.4 |
| 25° | 431.1 |
| 27.5° | 390.9 |
| 30° | 343.3 |
| 32.5° | 287.4 |
| 35° | 228.8 |
| 37.5° | 179.4 |
| 40° | 136.4 |
| 42.5° | 101.6 |
| 45° | 75.1 |
| 47.5° | 54.9 |
| 50° | 40.3 |
| 52.5° | 30.2 |
| 55° | 22.9 |
| 57.5° | 17.4 |
| 60° | 13.7 |
| 62.5° | 10.1 |
| 65° | 8.2 |
| 67.5° | 6.4 |
| 70° | 4.6 |
| 72.5° | 3.6 |
| 75° | 2.7 |
| 77.5° | 1.8 |
| 80° | 0.9 |
| 82.5° | 0.9 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)