

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785363

Luminaire Tested: LERS6D02D010-EC6DR150210IC9027-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P785363  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D02D010-EC6DR150210IC9027-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 354.5 lumens  
Efficiency: N/A  
Efficacy: 69.5 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct


Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P785363  
CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9027-6LBS1MW

### Luminous Intensity Polar Plot

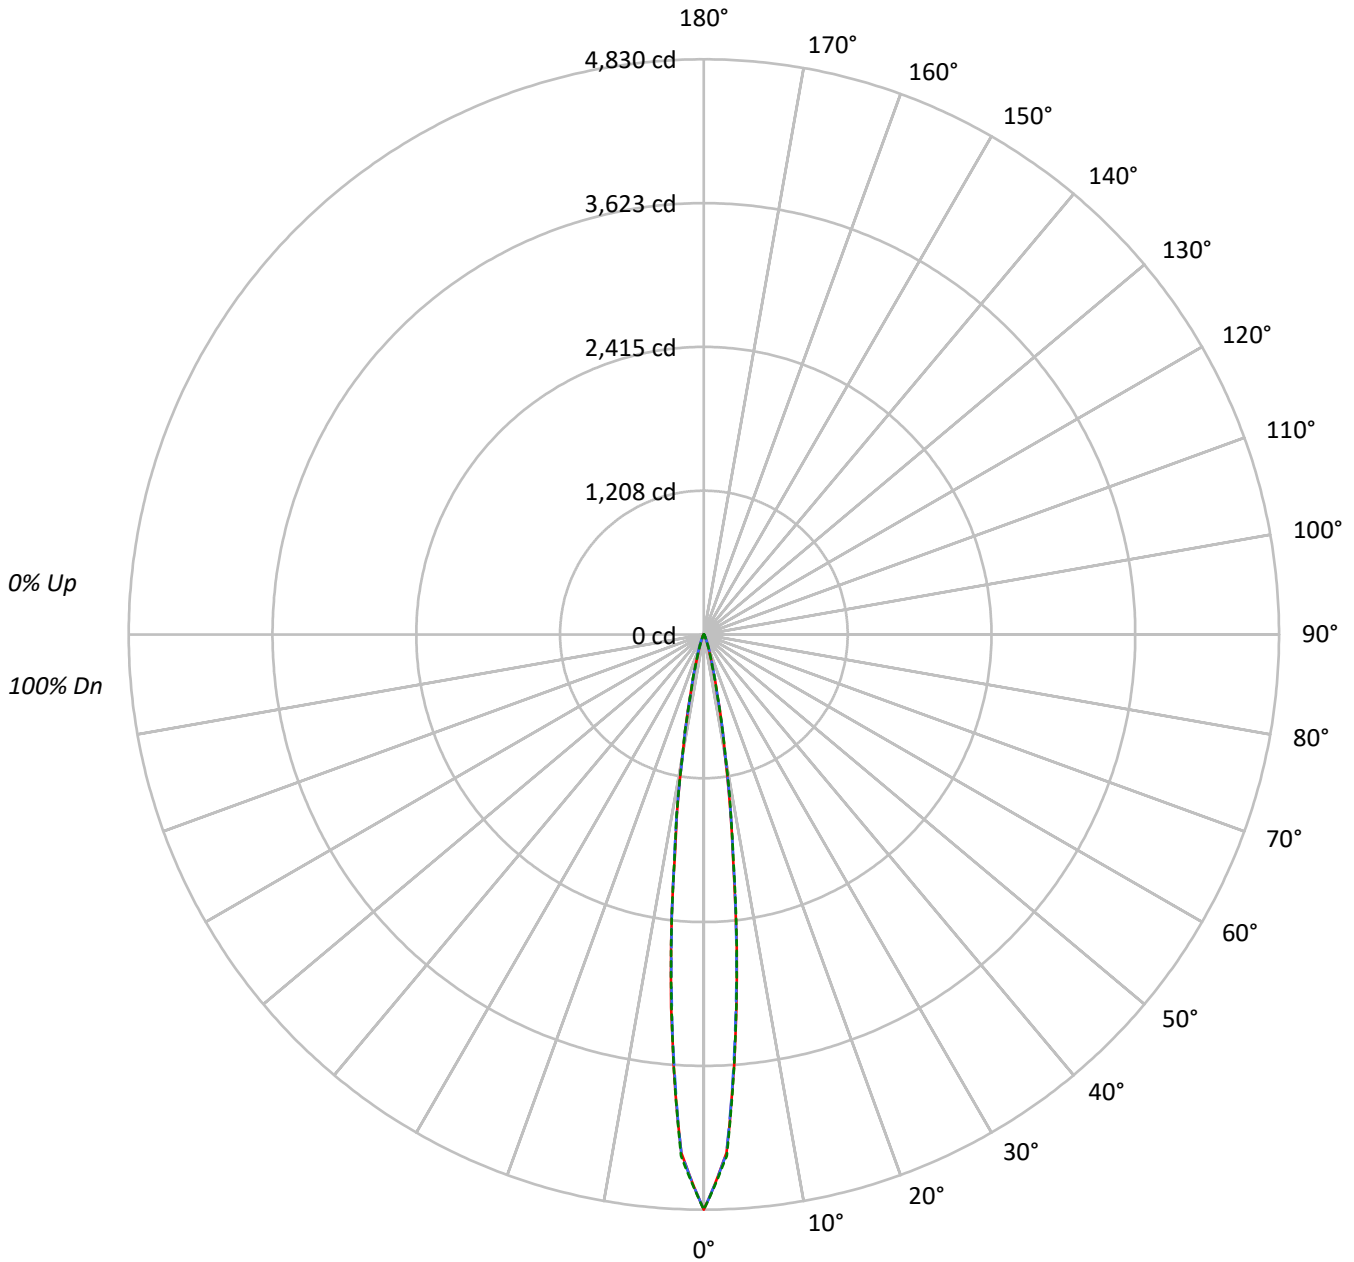



TEST NUMBER: P785363

CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9027-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	99	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	99	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	94	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	543494	543494	543494
5°	319379	315243	317743
10°	95323	95986	97460
15°	23712	24172	23425
20°	7094	8215	7241
25°	2501	3186	2532
30°	921	1213	936
35°	458	523	443
40°	291	320	291
45°	217	231	217
50°	174	174	174
55°	139	139	139
60°	112	112	112
65°	86	86	86
70°	73	73	73
75°	45	45	60
80°	32	32	32
85°	17	17	17

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 231 cd/sqm



TEST NUMBER: P785363

CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9027-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	229.9	64.9
10°-20°	94.6	26.7
20°-30°	18.8	5.3
30°-40°	4.7	1.3
40°-50°	2.5	0.7
50°-60°	1.8	0.5
60°-70°	1.3	0.4
70°-80°	0.7	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	343.3	96.8
0°-40°	348.0	98.2
0°-60°	352.3	99.4
0°-90°	354.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	354.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4830	4830	4830	4830	4830	
5°	3143	3110	3102	3123	3126	229
15°	273	278	278	273	270	94
25°	32	36	41	36	32	17
35°	6	7	7	7	6	4
45°	3	3	3	3	3	2
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P785363

CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9027-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4830.2	4830.2	4830.2	4830.2	4830.2
2.5°	4357.0	4360.7	4362.1	4366.4	4382.4
5°	3142.6	3110.3	3101.9	3123.4	3126.5
7.5°	1861.6	1868.1	1892.0	1897.4	1878.1
10°	1021.6	1030.0	1028.7	1036.1	1044.5
12.5°	522.4	515.9	513.9	522.2	510.6
15°	273.0	278.1	278.3	273.4	269.7
17.5°	146.8	152.7	162.6	154.6	142.3
20°	86.7	92.0	100.4	93.9	88.5
22.5°	53.6	57.9	63.8	58.7	54.4
25°	32.1	36.4	40.9	36.2	32.5
27.5°	19.0	22.7	25.6	22.5	18.8
30°	12.3	14.3	16.2	14.1	12.5
32.5°	8.6	9.4	10.2	9.4	8.6
35°	6.3	6.7	7.2	6.7	6.1
37.5°	4.9	5.3	5.5	5.1	4.7
40°	4.1	4.3	4.5	4.3	4.1
42.5°	3.5	3.7	3.7	3.7	3.5
45°	3.1	3.1	3.3	3.1	3.1
47.5°	2.7	2.7	2.9	2.7	2.7
50°	2.5	2.5	2.5	2.5	2.5
52.5°	2.2	2.2	2.2	2.2	2.2
55°	2.0	2.0	2.0	2.0	2.0
57.5°	1.8	1.8	1.8	1.8	1.8
60°	1.6	1.6	1.6	1.6	1.6
62.5°	1.4	1.4	1.4	1.4	1.4
65°	1.2	1.2	1.2	1.2	1.2
67.5°	1.2	1.2	1.2	1.2	1.2
70°	1.0	1.0	1.0	1.0	1.0
72.5°	0.8	0.8	0.8	0.8	0.8
75°	0.6	0.6	0.6	0.6	0.8
77.5°	0.6	0.6	0.6	0.6	0.6
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)