

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785371

Luminaire Tested: LERS6D02D010-EC6DR150210IC9035-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P785371  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D02D010-EC6DR150210IC9035-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 386.4 lumens  
Efficiency: N/A  
Efficacy: 75.8 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P785371

CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9035-6LBS1MW

### Luminous Intensity Polar Plot

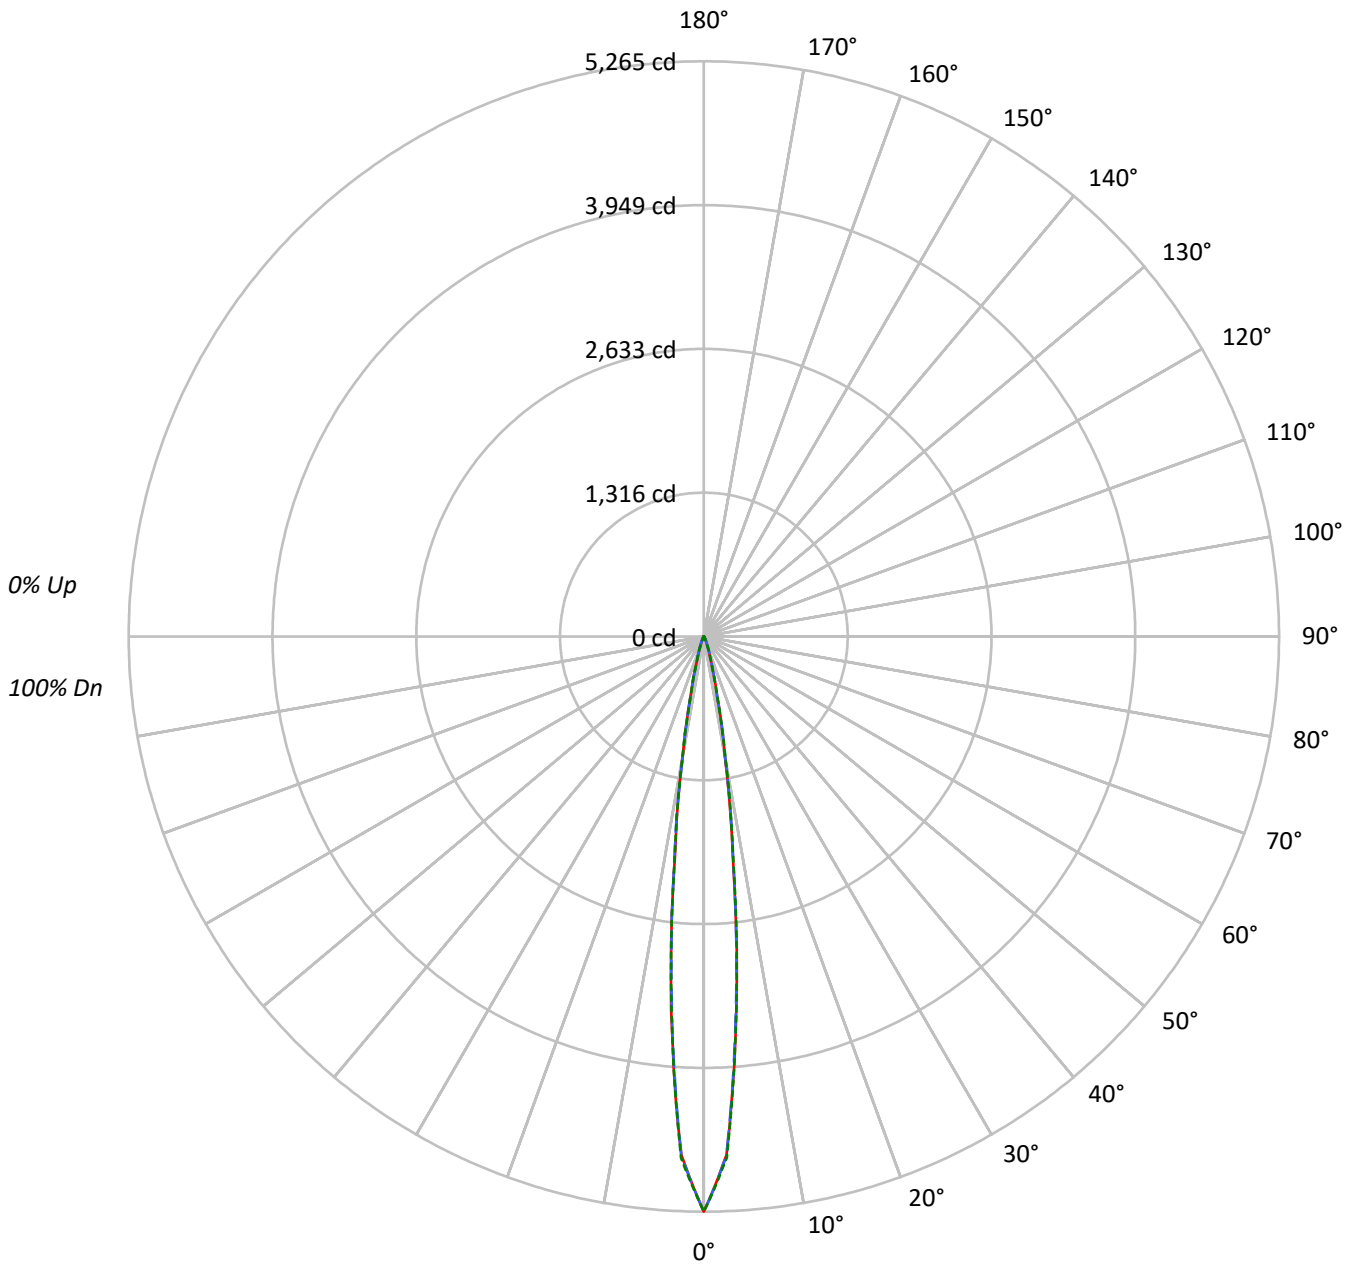



TEST NUMBER: P785371

CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9035-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	99	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	99	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	592429	592429	592429
5°	348140	343638	346351
10°	103907	104635	106231
15°	25849	26352	25536
20°	7732	8951	7896
25°	2727	3474	2758
30°	1003	1318	1018
35°	501	566	487
40°	320	348	320
45°	231	252	231
50°	188	188	188
55°	153	153	153
60°	126	126	126
65°	93	93	93
70°	80	80	80
75°	53	53	68
80°	32	32	32
85°	17	17	17

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 252 cd/sqm



TEST NUMBER: P785371

CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9035-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	250.6	64.9
10°-20°	103.1	26.7
20°-30°	20.5	5.3
30°-40°	5.1	1.3
40°-50°	2.7	0.7
50°-60°	2.0	0.5
60°-70°	1.4	0.4
70°-80°	0.8	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	374.2	96.8
0°-40°	379.3	98.2
0°-60°	384.0	99.4
0°-90°	386.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	386.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	5265	5265	5265	5265	5265	
5°	3426	3390	3381	3405	3408	250
15°	298	303	303	298	294	102
25°	35	40	45	40	35	18
35°	7	7	8	7	7	5
45°	3	3	4	3	3	3
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P785371

CATALOG NUMBER: LERS6D02D010-EC6DR150210IC9035-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	5265.1	5265.1	5265.1	5265.1	5265.1
2.5°	4749.4	4753.4	4754.9	4759.6	4777.0
5°	3425.6	3390.4	3381.3	3404.7	3408.0
7.5°	2029.2	2036.3	2062.4	2068.2	2047.3
10°	1113.6	1122.7	1121.4	1129.4	1138.5
12.5°	569.5	562.4	560.1	569.3	556.6
15°	297.6	303.1	303.4	298.0	294.0
17.5°	160.0	166.5	177.2	168.5	155.1
20°	94.5	100.3	109.4	102.3	96.5
22.5°	58.4	63.1	69.5	64.0	59.3
25°	35.0	39.7	44.6	39.5	35.4
27.5°	20.7	24.7	27.9	24.5	20.5
30°	13.4	15.6	17.6	15.4	13.6
32.5°	9.4	10.3	11.1	10.3	9.4
35°	6.9	7.4	7.8	7.4	6.7
37.5°	5.3	5.8	6.0	5.6	5.1
40°	4.5	4.7	4.9	4.7	4.5
42.5°	3.8	4.0	4.0	4.0	3.8
45°	3.3	3.3	3.6	3.3	3.3
47.5°	2.9	2.9	3.1	2.9	2.9
50°	2.7	2.7	2.7	2.7	2.7
52.5°	2.5	2.5	2.5	2.5	2.5
55°	2.2	2.2	2.2	2.2	2.2
57.5°	2.0	2.0	2.0	2.0	2.0
60°	1.8	1.8	1.8	1.8	1.8
62.5°	1.6	1.6	1.6	1.6	1.6
65°	1.3	1.3	1.3	1.3	1.3
67.5°	1.3	1.3	1.3	1.3	1.3
70°	1.1	1.1	1.1	1.1	1.1
72.5°	0.9	0.9	0.9	0.9	0.9
75°	0.7	0.7	0.7	0.7	0.9
77.5°	0.7	0.7	0.7	0.7	0.7
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)