

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785434

Luminaire Tested: LERS6D02D010-EC6DR300210IC9027-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P785434  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D02D010-EC6DR300210IC9027-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 661.2 lumens  
Efficiency: N/A  
Efficacy: 129.7 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P785434

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1LI

### Luminous Intensity Polar Plot

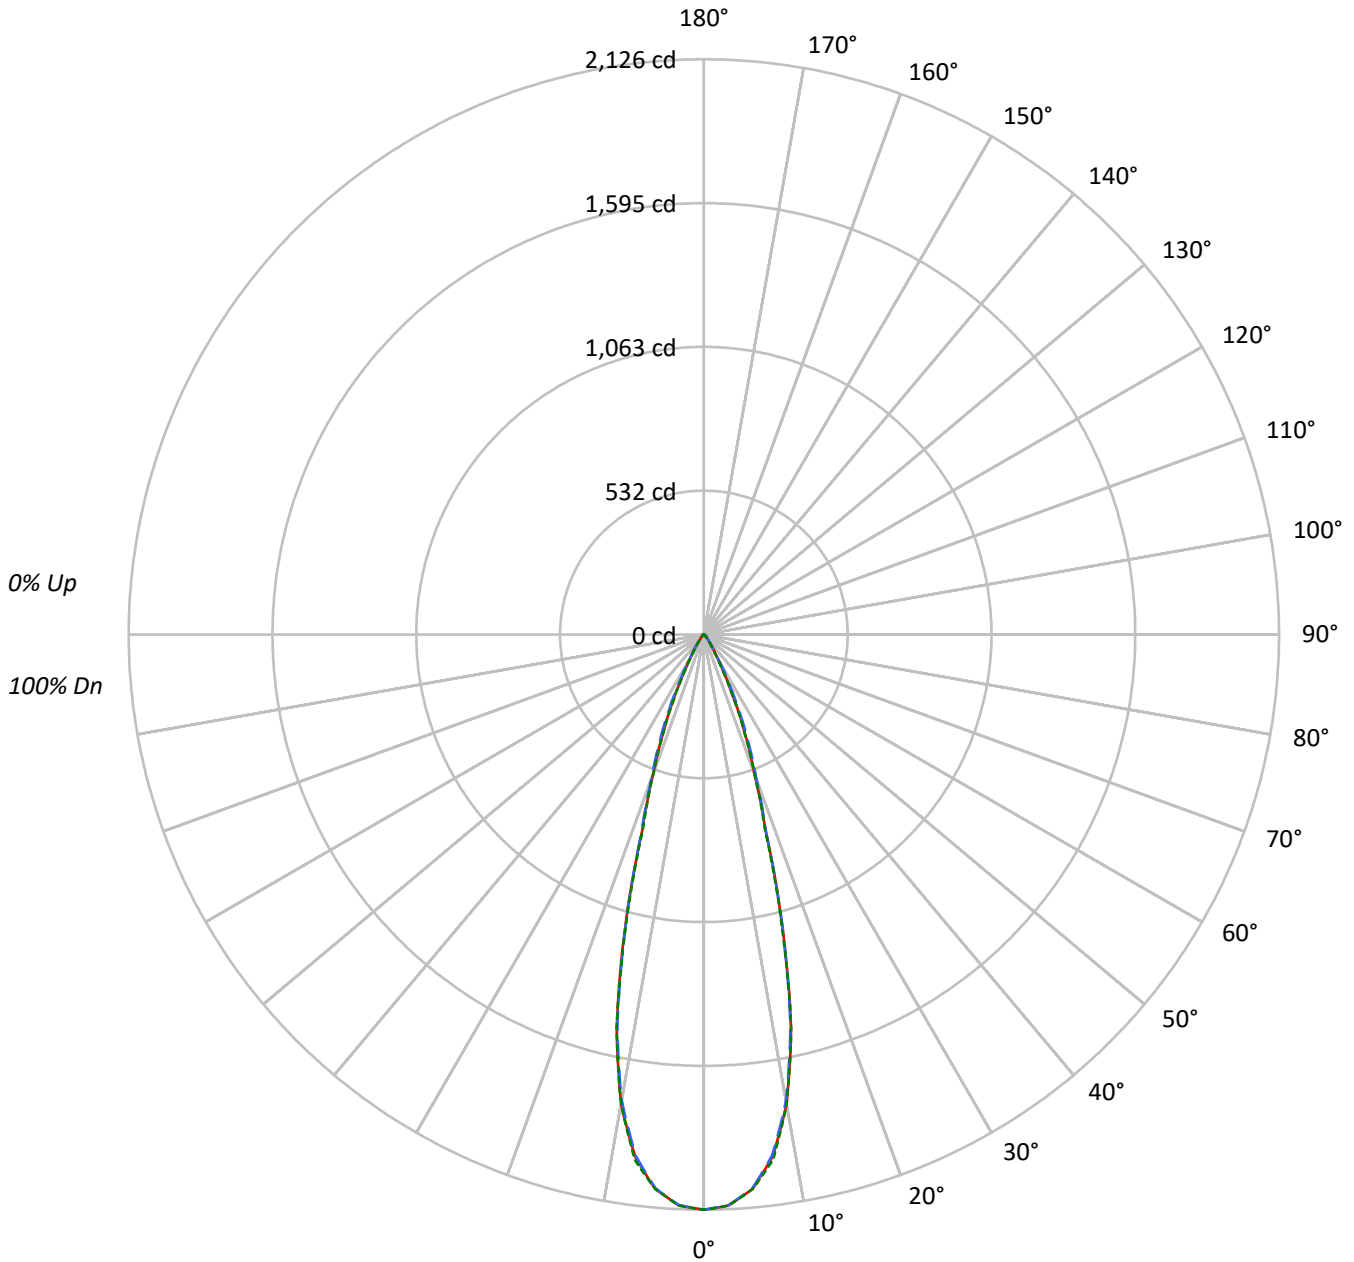



TEST NUMBER: P785434

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	162754	162754	162754
5°	158082	157898	158090
10°	136919	135955	136888
15°	89331	88856	88404
20°	44418	46088	44361
25°	22372	25236	21916
30°	8962	9758	7804
35°	4158	3981	3336
40°	1799	1988	1689
45°	1267	1570	1277
50°	441	1143	464
55°	254	467	267
60°	168	214	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 1570 cd/sqm



TEST NUMBER: P785434

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	187.0	28.3
10°-20°	301.1	45.5
20°-30°	130.1	19.7
30°-40°	29.7	4.5
40°-50°	10.2	1.5
50°-60°	2.5	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	618.2	93.5
0°-40°	647.9	98.0
0°-60°	660.6	99.9
0°-90°	661.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	661.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2126	2126	2126	2126	2126	
5°	2057	2055	2055	2059	2058	187
15°	1127	1114	1121	1118	1116	302
25°	265	275	299	268	260	127
35°	44	45	43	42	36	30
45°	12	14	14	14	12	8
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P785434

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9027-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2126.3	2126.3	2126.3	2126.3	2126.3
2.5°	2112.2	2110.7	2111.5	2112.6	2113.0
5°	2057.4	2055.4	2055.0	2059.2	2057.5
7.5°	1946.8	1944.0	1939.7	1949.4	1958.5
10°	1761.6	1758.5	1749.2	1753.8	1761.2
12.5°	1488.2	1478.1	1477.9	1492.5	1490.5
15°	1127.3	1113.8	1121.3	1117.6	1115.6
17.5°	758.1	752.9	762.9	759.9	746.8
20°	545.3	546.7	565.8	556.2	544.6
22.5°	397.9	402.9	425.5	400.8	391.7
25°	264.9	275.0	298.8	268.0	259.5
27.5°	163.0	167.5	191.7	160.9	156.3
30°	101.4	99.1	110.4	94.8	88.3
32.5°	66.5	63.6	67.2	60.3	55.1
35°	44.5	45.4	42.6	42.3	35.7
37.5°	27.8	31.9	28.2	30.1	23.0
40°	18.0	23.2	19.9	22.0	16.9
42.5°	14.7	17.9	16.4	17.4	15.0
45°	11.7	14.5	14.5	14.5	11.8
47.5°	6.5	9.7	12.4	9.9	6.9
50°	3.7	4.9	9.6	5.1	3.9
52.5°	2.5	2.8	6.6	2.9	2.6
55°	1.9	2.0	3.5	2.1	2.0
57.5°	1.5	1.6	1.9	1.6	1.5
60°	1.1	1.1	1.4	1.3	1.1
62.5°	0.8	0.8	0.9	0.8	0.8
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)