

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785445

Luminaire Tested: LERS6D02D010-EC6DR300210IC9040-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P785445  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D02D010-EC6DR300210IC9040-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 705.4 lumens  
Efficiency: N/A  
Efficacy: 138.3 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P785445

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9040-6LBS1H

### Luminous Intensity Polar Plot

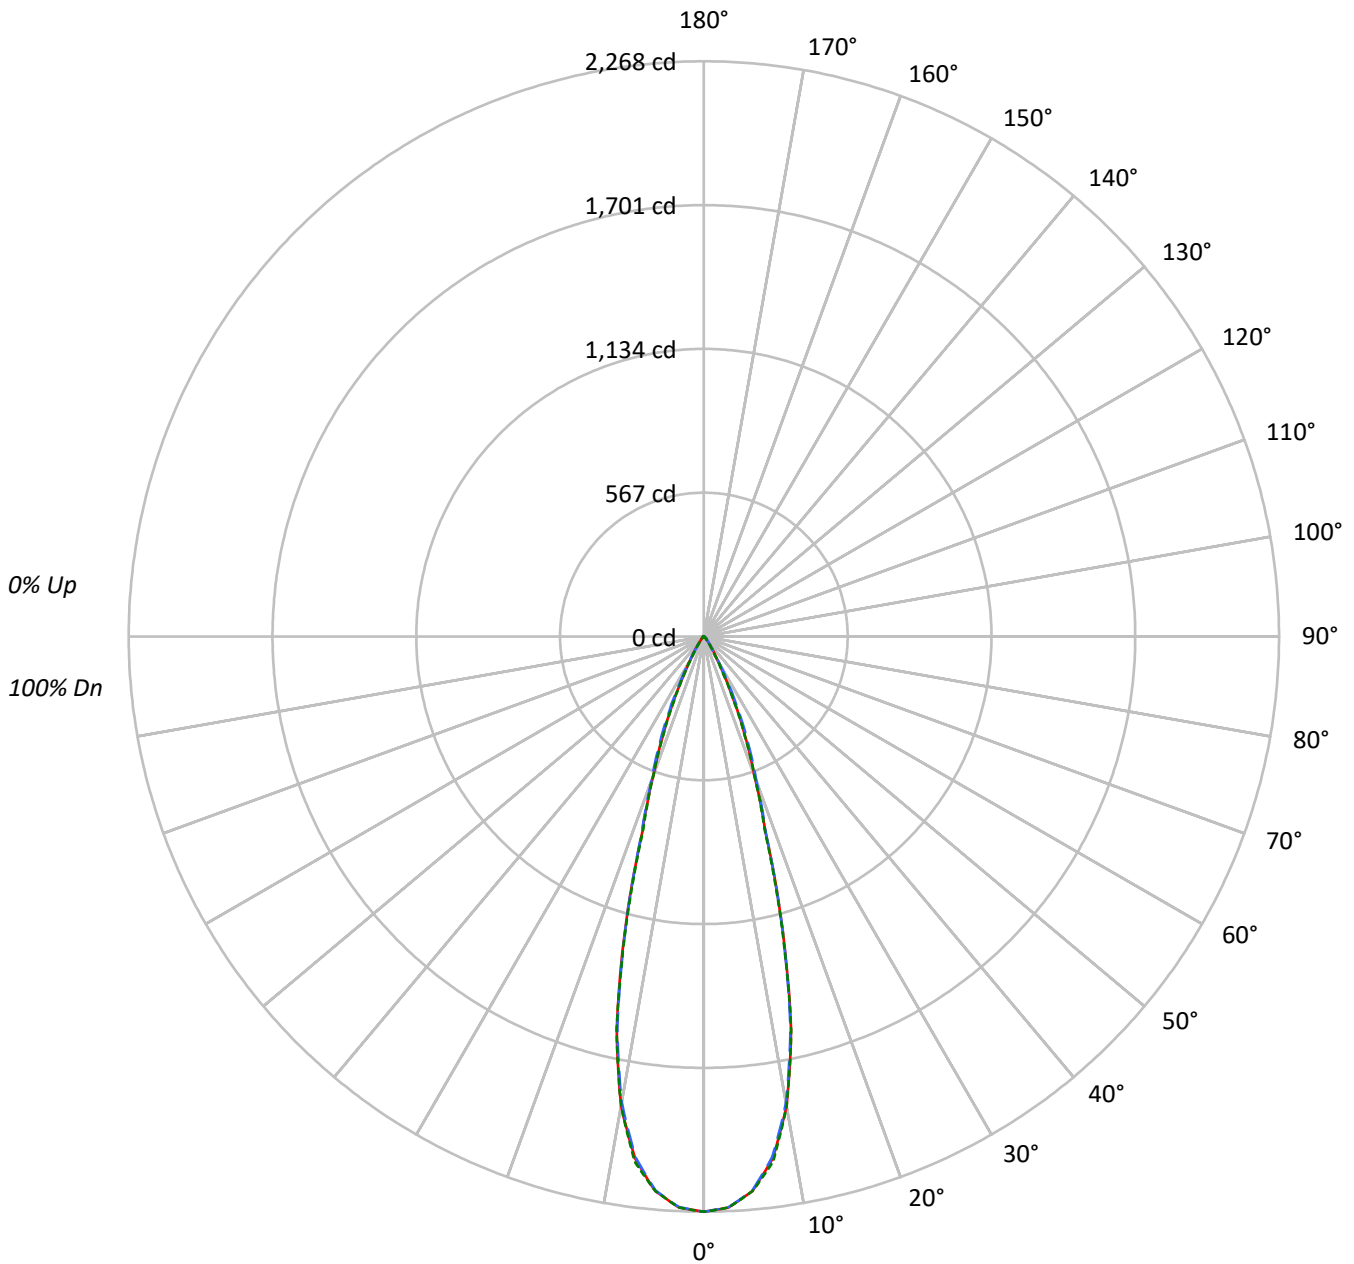



TEST NUMBER: P785445

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9040-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	173631	173631	173631
5°	168647	168447	168655
10°	146075	145041	146036
15°	95306	94791	94316
20°	47391	49167	47326
25°	23876	26916	23386
30°	9554	10412	8326
35°	4429	4242	3560
40°	1918	2128	1799
45°	1353	1678	1364
50°	464	1215	488
55°	267	507	280
60°	184	214	184
65°	127	127	127
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1678 cd/sqm



TEST NUMBER: P785445

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9040-6LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	199.5	28.3
10°-20°	321.2	45.5
20°-30°	138.8	19.7
30°-40°	31.6	4.5
40°-50°	10.9	1.5
50°-60°	2.7	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	659.5	93.5
0°-40°	691.2	98.0
0°-60°	704.7	99.9
0°-90°	705.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	705.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2268	2268	2268	2268	2268	
5°	2195	2193	2192	2197	2195	200
15°	1203	1188	1196	1192	1190	322
25°	283	293	319	286	277	135
35°	47	48	45	45	38	32
45°	12	16	16	16	13	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P785445

CATALOG NUMBER: LERS6D02D010-EC6DR300210IC9040-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2268.4	2268.4	2268.4	2268.4	2268.4
2.5°	2253.4	2251.8	2252.7	2253.8	2254.2
5°	2194.9	2192.8	2192.3	2196.9	2195.0
7.5°	2076.9	2073.9	2069.4	2079.7	2089.4
10°	1879.4	1876.0	1866.1	1871.0	1878.9
12.5°	1587.7	1576.9	1576.7	1592.3	1590.1
15°	1202.7	1188.2	1196.2	1192.3	1190.2
17.5°	808.8	803.2	813.9	810.7	796.7
20°	581.8	583.2	603.6	593.4	581.0
22.5°	424.5	429.8	453.9	427.6	417.9
25°	282.7	293.3	318.7	285.9	276.9
27.5°	173.8	178.7	204.5	171.6	166.7
30°	108.1	105.7	117.8	101.1	94.2
32.5°	70.9	67.8	71.7	64.4	58.8
35°	47.4	48.4	45.4	45.1	38.1
37.5°	29.6	34.1	30.1	32.1	24.5
40°	19.2	24.7	21.3	23.5	18.0
42.5°	15.7	19.0	17.5	18.6	16.0
45°	12.5	15.5	15.5	15.5	12.6
47.5°	6.9	10.4	13.3	10.6	7.4
50°	3.9	5.2	10.2	5.5	4.1
52.5°	2.7	3.0	7.0	3.1	2.8
55°	2.0	2.1	3.8	2.2	2.1
57.5°	1.6	1.7	2.0	1.7	1.6
60°	1.2	1.2	1.4	1.3	1.2
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.7	0.7	0.7	0.7	0.7
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)