

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785672

Luminaire Tested: LERS6D05D010-EC6DR150210IC9027-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P785672
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS6D05D010-EC6DR150210IC9027-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 638.5 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785672

CATALOG NUMBER: LERS6D05D010-EC6DR150210IC9027-6LBS1B

Luminous Intensity Polar Plot

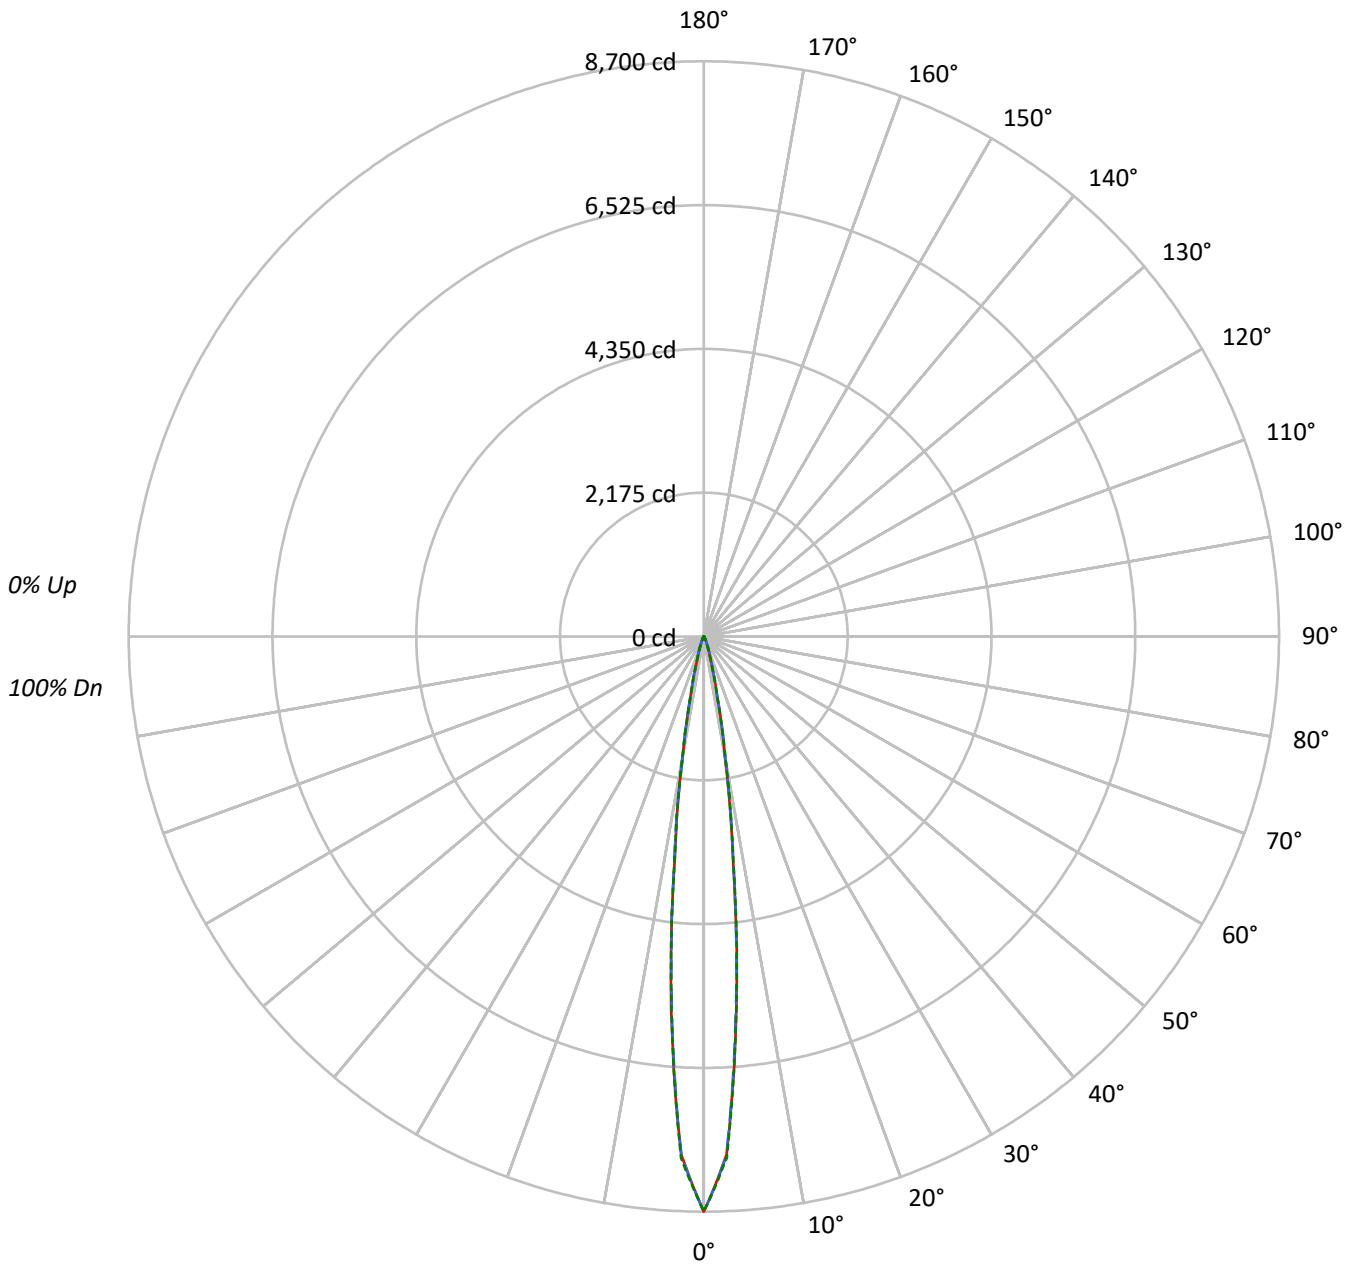



TEST NUMBER: P785672

CATALOG NUMBER: LERS6D05D010-EC6DR150210IC9027-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	978946	978946	978946
5°	575281	567831	572323
10°	171695	172899	175540
15°	42708	43541	42195
20°	12781	14794	13051
25°	4503	5741	4565
30°	1655	2179	1685
35°	828	937	799
40°	526	575	526
45°	385	413	385
50°	306	306	306
55°	258	258	258
60°	204	204	204
65°	157	157	157
70°	132	132	132
75°	83	83	113
80°	55	55	55
85°	33	33	33

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 413 cd/sqm



TEST NUMBER: P785672

CATALOG NUMBER: LERS6D05D010-EC6DR150210IC9027-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	414.1	64.9
10°-20°	170.3	26.7
20°-30°	33.8	5.3
30°-40°	8.4	1.3
40°-50°	4.4	0.7
50°-60°	3.3	0.5
60°-70°	2.3	0.4
70°-80°	1.3	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	618.3	96.8
0°-40°	626.8	98.2
0°-60°	634.5	99.4
0°-90°	638.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	638.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	8700	8700	8700	8700	8700	
5°	5661	5602	5587	5626	5632	413
15°	492	501	501	492	486	169
25°	58	66	74	65	59	30
35°	11	12	13	12	11	8
45°	6	6	6	6	6	4
55°	4	4	4	4	4	3
65°	2	2	2	2	2	2
75°	1	1	1	1	2	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P785672

CATALOG NUMBER: LERS6D05D010-EC6DR150210IC9027-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	8700.2	8700.2	8700.2	8700.2	8700.2
2.5°	7848.0	7854.6	7857.2	7864.9	7893.6
5°	5660.6	5602.4	5587.3	5626.0	5631.5
7.5°	3353.1	3364.9	3408.0	3417.6	3382.9
10°	1840.1	1855.2	1853.0	1866.2	1881.3
12.5°	941.0	929.2	925.6	940.7	919.7
15°	491.7	500.9	501.3	492.4	485.8
17.5°	264.4	275.1	292.8	278.4	256.3
20°	156.2	165.7	180.8	169.1	159.5
22.5°	96.5	104.2	114.9	105.7	98.0
25°	57.8	65.6	73.7	65.2	58.6
27.5°	34.3	40.9	46.0	40.5	33.9
30°	22.1	25.8	29.1	25.4	22.5
32.5°	15.5	16.9	18.4	16.9	15.5
35°	11.4	12.2	12.9	12.2	11.0
37.5°	8.8	9.6	9.9	9.2	8.5
40°	7.4	7.7	8.1	7.7	7.4
42.5°	6.3	6.6	6.6	6.6	6.3
45°	5.5	5.5	5.9	5.5	5.5
47.5°	4.8	4.8	5.2	4.8	4.8
50°	4.4	4.4	4.4	4.4	4.4
52.5°	4.1	4.1	4.1	4.1	4.1
55°	3.7	3.7	3.7	3.7	3.7
57.5°	3.3	3.3	3.3	3.3	3.3
60°	2.9	2.9	2.9	2.9	2.9
62.5°	2.6	2.6	2.6	2.6	2.6
65°	2.2	2.2	2.2	2.2	2.2
67.5°	2.2	2.2	2.2	2.2	2.2
70°	1.8	1.8	1.8	1.8	1.8
72.5°	1.5	1.5	1.5	1.5	1.5
75°	1.1	1.1	1.1	1.1	1.5
77.5°	1.1	1.1	1.1	1.1	1.1
80°	0.7	0.7	0.7	0.7	0.7
82.5°	0.7	0.7	0.7	0.7	0.7
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)