

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785709

Luminaire Tested: LERS6D05D010-EC6DR200210IC9040-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P785709
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS6D05D010-EC6DR200210IC9040-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 799.6 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785709

CATALOG NUMBER: LERS6D05D010-EC6DR200210IC9040-6LBS1H

Luminous Intensity Polar Plot

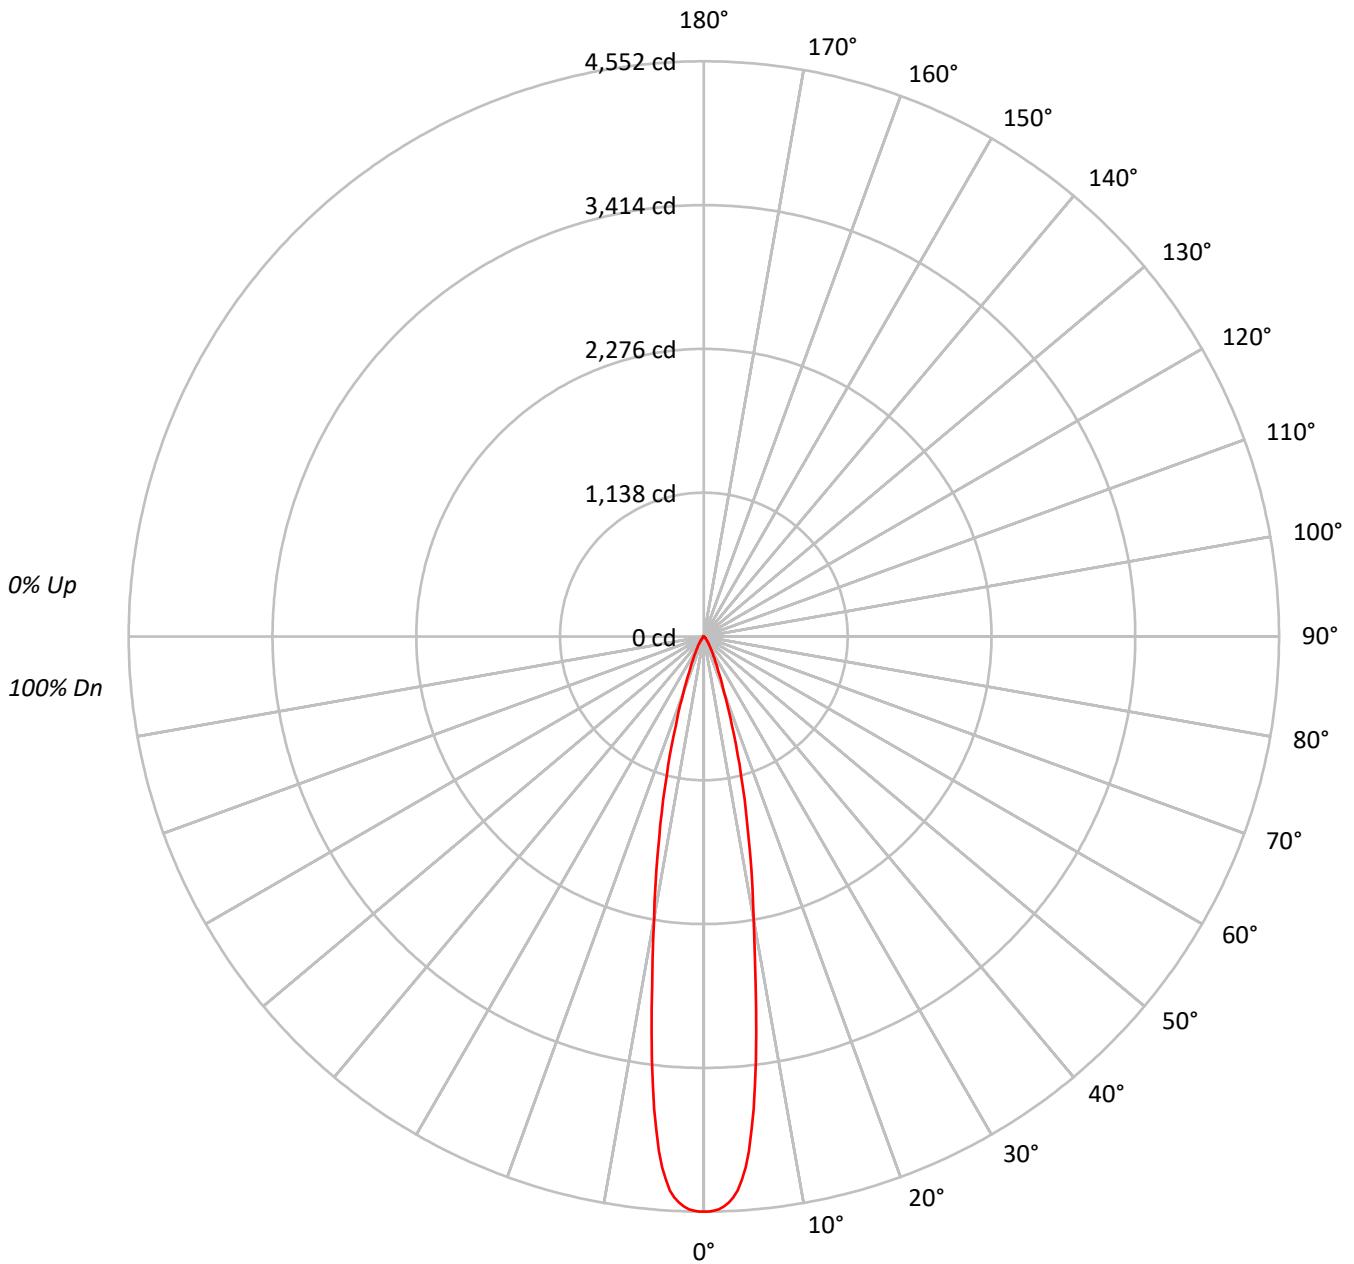



TEST NUMBER: P785709

CATALOG NUMBER: LERS6D05D010-EC6DR200210IC9040-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	96	95															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	96	94	93															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	94	92	91															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	91	89	88															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	89	87	86															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	87	85	84															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	85	83	82															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	83	81	80															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	497300
5°	448660
10°	251815
15°	128001
20°	54195
25°	25015
30°	13247
35°	7136
40°	3808
45°	2256
50°	1309
55°	686
60°	437
65°	310
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2256 cd/sqm



TEST NUMBER: P785709

CATALOG NUMBER: LERS6D05D010-EC6DR200210IC9040-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	324.1	40.5
10°-20°	319.1	39.9
20°-30°	104.2	13.0
30°-40°	35.5	4.4
40°-50°	11.9	1.5
50°-60°	3.6	0.4
60°-70°	1.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	747.4	93.5
0°-40°	782.9	97.9
0°-60°	798.4	99.8
0°-90°	799.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	799.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4552	
5°	4091	324
15°	1132	319
25°	208	104
35°	54	35
45°	15	12
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P785709

CATALOG NUMBER: LERS6D05D010-EC6DR200210IC9040-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	4551.5
0.5°	4551.5
1°	4545.8
1.5°	4534.5
2°	4513.8
2.5°	4486.2
3°	4447.3
3.5°	4393.0
4°	4312.4
4.5°	4214.3
5°	4090.7
5.5°	3928.1
6°	3761.6
6.5°	3570.7
7°	3383.8
7.5°	3165.0
8°	2969.6
8.5°	2773.0
9°	2591.5
9.5°	2424.9
10°	2269.7
12.5°	1629.7
15°	1131.6
17.5°	739.3
20°	466.1
22.5°	301.9
25°	207.5
27.5°	145.9
30°	105.0
32.5°	75.4
35°	53.5
37.5°	37.3
40°	26.7
42.5°	19.5
45°	14.6
47.5°	11.3
50°	7.7
52.5°	4.9
55°	3.6
57.5°	2.8
60°	2.0
62.5°	1.6
65°	1.2



TEST NUMBER: P785709

CATALOG NUMBER: LERS6D05D010-EC6DR200210IC9040-6LBS1H

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		0.8
70°		0.4

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)