

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785741

Luminaire Tested: LERS6D05D010-EC6DR300210IC9024-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P785741
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS6D05D010-EC6DR300210IC9024-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1034.4 lumens
Efficiency: N/A
Efficacy: 137.9 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785741

CATALOG NUMBER: LERS6D05D010-EC6DR300210IC9024-6LBS1H

Luminous Intensity Polar Plot

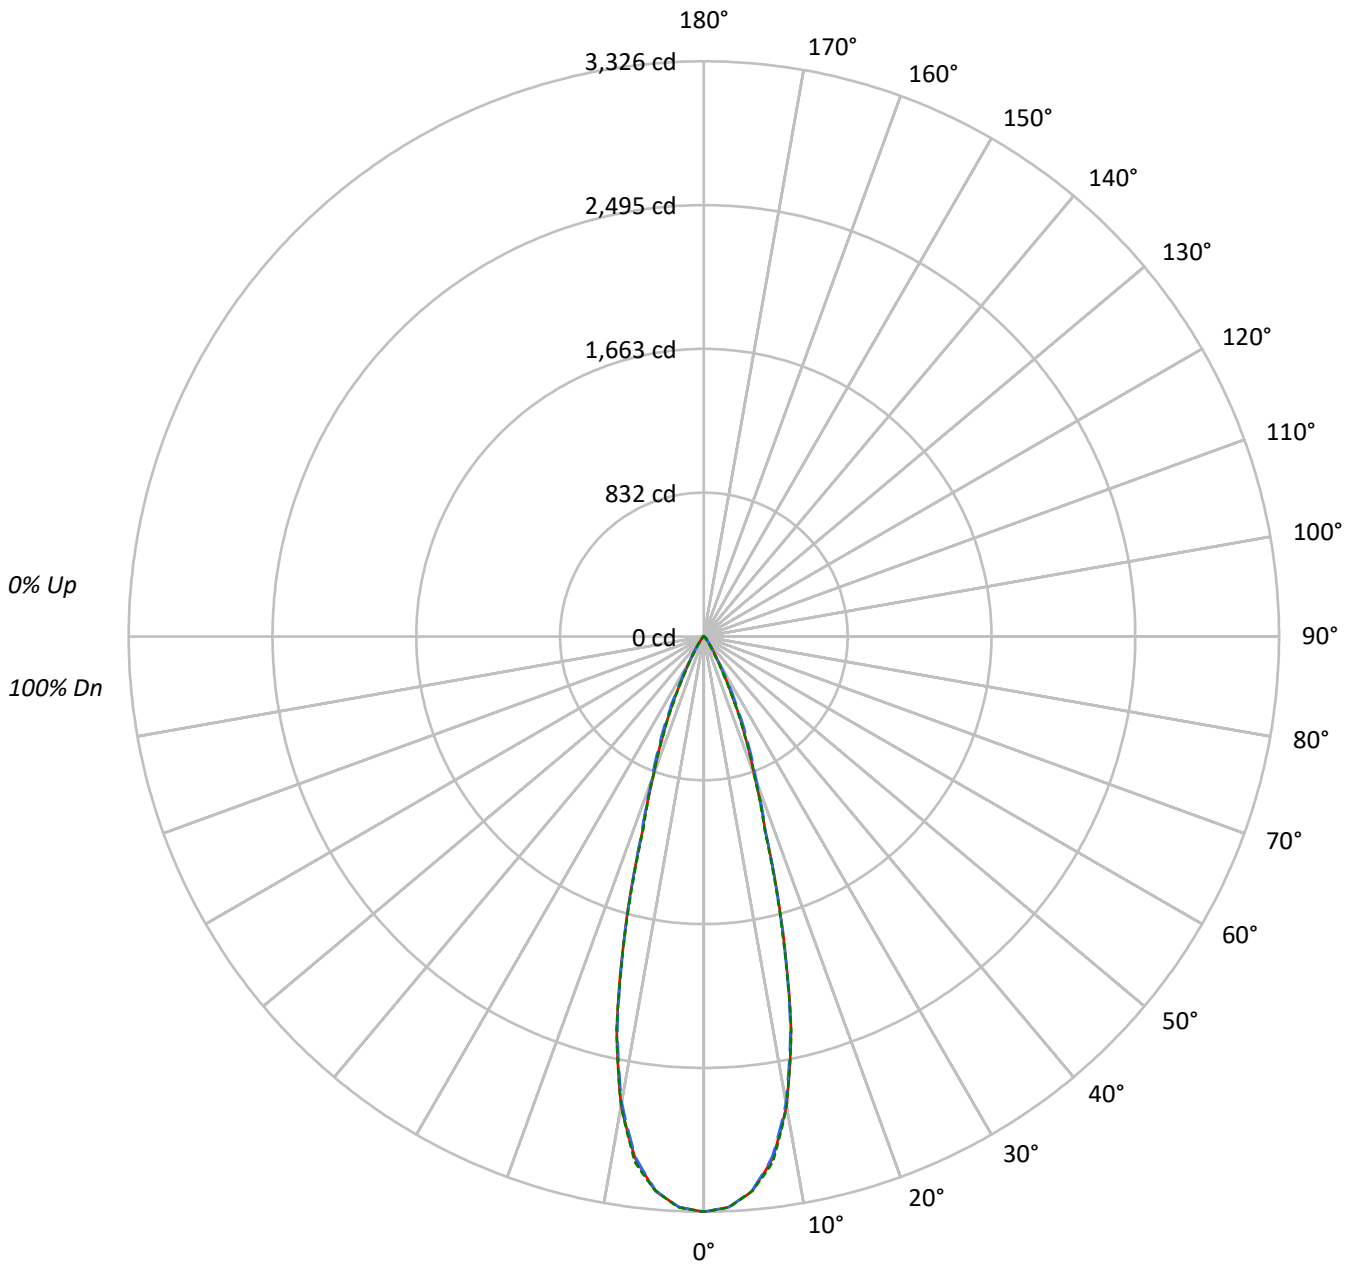



TEST NUMBER: P785741

CATALOG NUMBER: LERS6D05D010-EC6DR300210IC9024-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	254576	254576	254576
5°	247265	246973	247281
10°	214169	212661	214122
15°	139738	138985	138288
20°	69482	72088	69392
25°	34999	39466	34281
30°	14018	15273	12206
35°	6504	6223	5214
40°	2808	3118	2648
45°	1981	2457	2003
50°	679	1786	714
55°	387	747	414
60°	276	321	276
65°	181	181	181
70°	112	67	112
75°	0	59	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 2457 cd/sqm



TEST NUMBER: P785741

CATALOG NUMBER: LERS6D05D010-EC6DR300210IC9024-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	292.5	28.3
10°-20°	471.0	45.5
20°-30°	203.5	19.7
30°-40°	46.4	4.5
40°-50°	15.9	1.5
50°-60°	3.9	0.4
60°-70°	1.0	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	967.0	93.5
0°-40°	1013.4	98.0
0°-60°	1033.2	99.9
0°-90°	1034.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1034.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3326	3326	3326	3326	3326	
5°	3218	3215	3214	3221	3218	293
15°	1763	1742	1754	1748	1745	472
25°	414	430	467	419	406	198
35°	70	71	67	66	56	47
45°	18	23	23	23	18	13
55°	3	3	6	3	3	3
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P785741

CATALOG NUMBER: LERS6D05D010-EC6DR300210IC9024-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3325.9	3325.9	3325.9	3325.9	3325.9
2.5°	3303.8	3301.5	3302.9	3304.5	3305.1
5°	3218.1	3215.0	3214.3	3221.0	3218.3
7.5°	3045.2	3040.8	3034.1	3049.3	3063.5
10°	2755.5	2750.6	2736.1	2743.3	2754.9
12.5°	2327.9	2312.0	2311.7	2334.5	2331.4
15°	1763.4	1742.1	1753.9	1748.2	1745.1
17.5°	1185.8	1177.6	1193.3	1188.6	1168.2
20°	853.0	855.1	885.0	870.0	851.9
22.5°	622.5	630.1	665.6	626.9	612.7
25°	414.4	430.1	467.3	419.2	405.9
27.5°	254.9	262.1	299.8	251.6	244.4
30°	158.6	155.0	172.8	148.3	138.1
32.5°	104.0	99.4	105.2	94.4	86.2
35°	69.6	71.0	66.6	66.1	55.8
37.5°	43.4	50.0	44.1	47.0	35.9
40°	28.1	36.3	31.2	34.5	26.5
42.5°	23.0	27.9	25.6	27.3	23.5
45°	18.3	22.7	22.7	22.7	18.5
47.5°	10.1	15.2	19.4	15.5	10.8
50°	5.7	7.7	15.0	8.0	6.0
52.5°	3.9	4.4	10.3	4.6	4.1
55°	2.9	3.1	5.6	3.3	3.1
57.5°	2.3	2.4	2.9	2.4	2.3
60°	1.8	1.8	2.1	2.0	1.8
62.5°	1.3	1.3	1.5	1.3	1.3
65°	1.0	1.0	1.0	1.0	1.0
67.5°	0.5	0.7	0.7	0.7	0.7
70°	0.5	0.3	0.3	0.3	0.5
72.5°	0.3	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)