

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785910

Luminaire Tested: LERS6D05D010-EC6DR650210IC9024-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P785910
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS6D05D010-EC6DR650210IC9024-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 974.6 lumens
Efficiency: N/A
Efficacy: 129.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785910

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9024-6LBS1LI

Luminous Intensity Polar Plot

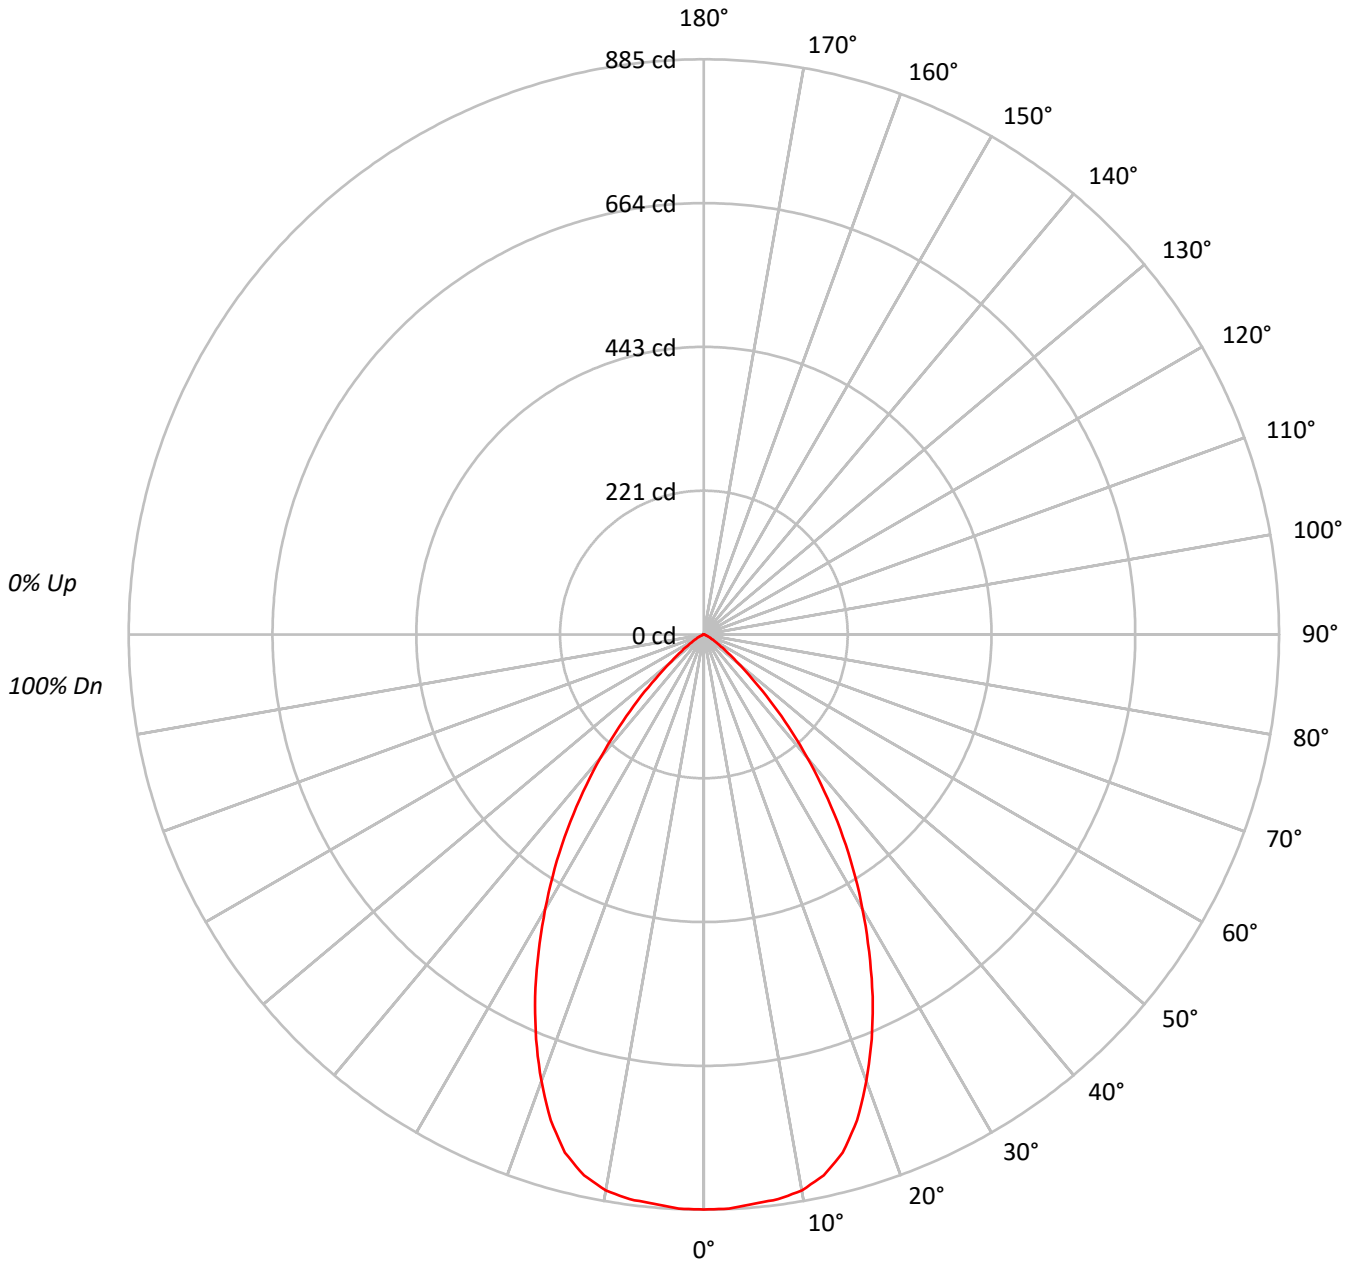



TEST NUMBER: P785910

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9024-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72	72	72	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	51676
5°	51545
10°	51506
15°	49913
20°	45439
25°	39599
30°	32937
35°	26095
40°	18839
45°	11902
50°	6206
55°	3299
60°	1729
65°	954
70°	393
75°	451
80°	303
85°	268

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11902 cd/sqm



TEST NUMBER: P785910

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9024-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	83.7	8.6
10°-20°	229.1	23.5
20°-30°	280.1	28.7
30°-40°	227.2	23.3
40°-50°	113.3	11.6
50°-60°	31.6	3.2
60°-70°	7.2	0.7
70°-80°	1.9	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	592.9	60.8
0°-40°	820.1	84.2
0°-60°	965.0	99.0
0°-90°	974.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	974.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	885	
5°	879	84
15°	826	229
25°	614	280
35°	366	227
45°	144	113
55°	32	32
65°	7	7
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P785910

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9024-6LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	884.8
2.5°	884.2
5°	879.2
7.5°	876.4
10°	868.5
12.5°	852.3
15°	825.5
17.5°	783.7
20°	731.1
22.5°	674.5
25°	614.5
27.5°	550.4
30°	488.4
32.5°	427.1
35°	366.0
37.5°	305.0
40°	247.1
42.5°	192.7
45°	144.1
47.5°	100.4
50°	68.3
52.5°	47.1
55°	32.4
57.5°	21.8
60°	14.8
62.5°	10.3
65°	6.9
67.5°	3.5
70°	2.3
72.5°	2.2
75°	2.0
77.5°	1.3
80°	0.9
82.5°	0.7
85°	0.4
87.5°	0.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)