

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785930

Luminaire Tested: LERS6D05D010-EC6DR650210IC9050-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P785930  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D05D010-EC6DR650210IC9050-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1197.5 lumens  
Efficiency: N/A  
Efficacy: 159.7 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P785930

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9050-6LBS1LI

### Luminous Intensity Polar Plot

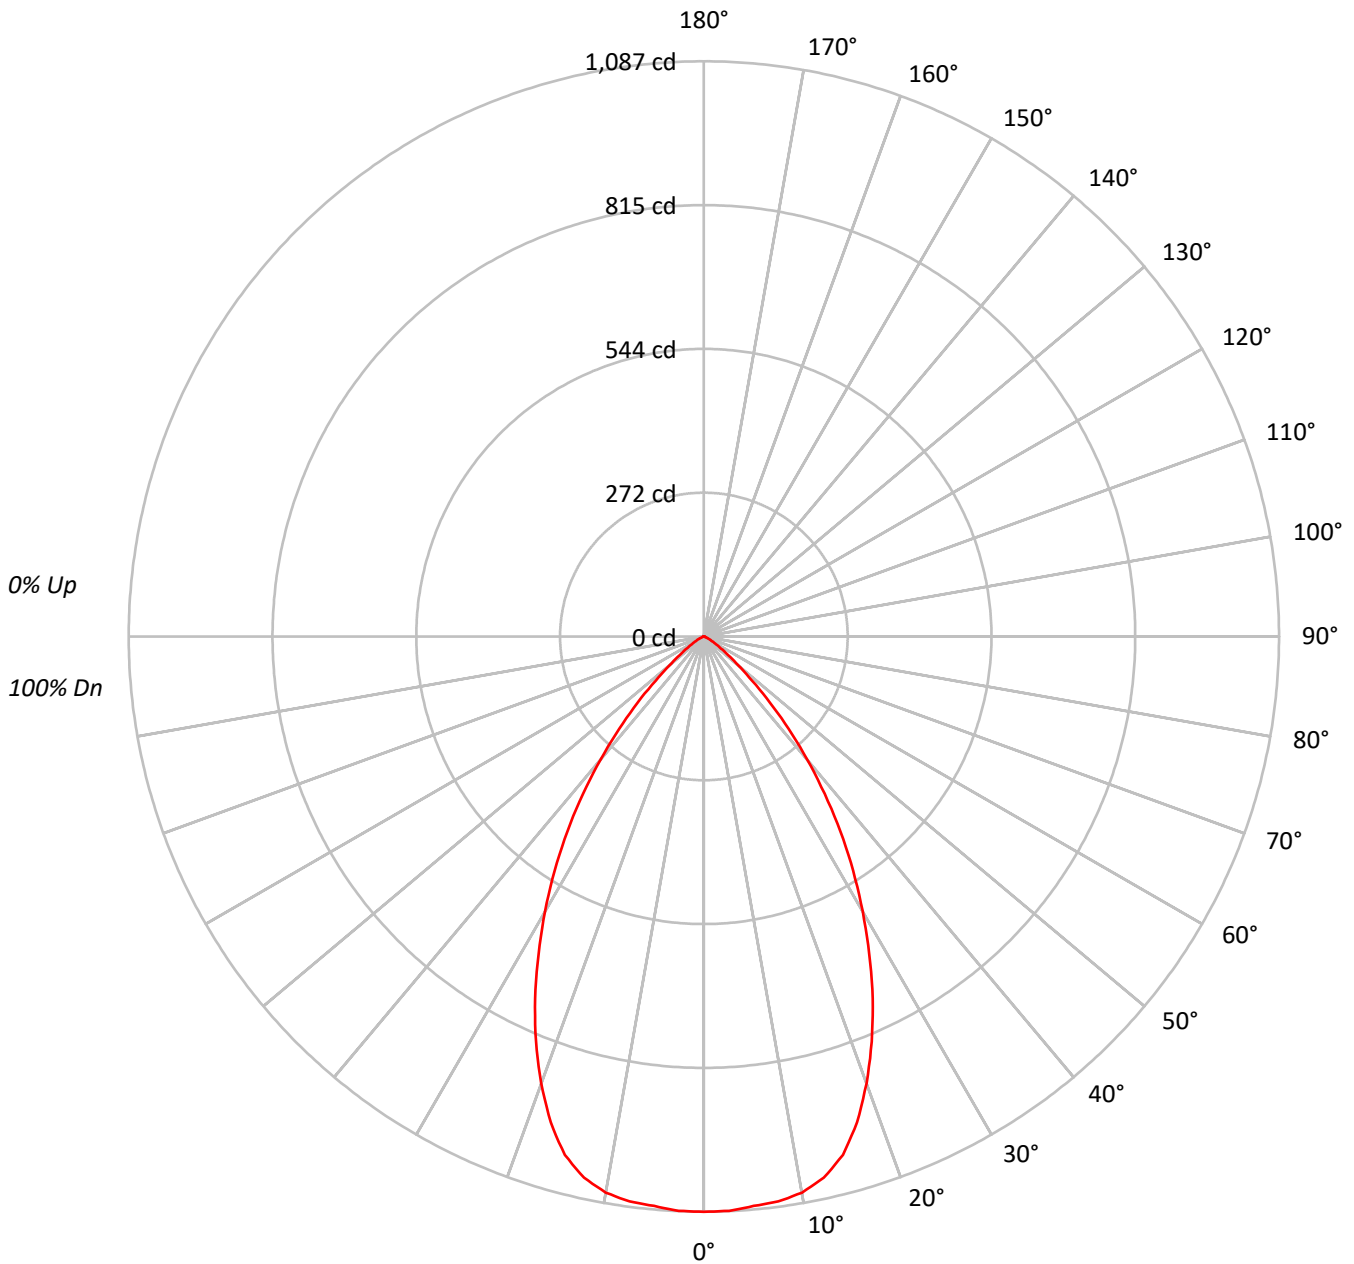



TEST NUMBER: P785930

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9050-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	63503
5°	63341
10°	63290
15°	61341
20°	55844
25°	48660
30°	40470
35°	32070
40°	23147
45°	14619
50°	7623
55°	4053
60°	2126
65°	1175
70°	495
75°	542
80°	370
85°	335

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14619 cd/sqm



TEST NUMBER: P785930

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9050-6LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	102.8	8.6
10°-20°	281.6	23.5
20°-30°	344.2	28.7
30°-40°	279.3	23.3
40°-50°	139.2	11.6
50°-60°	38.8	3.2
60°-70°	8.8	0.7
70°-80°	2.3	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	728.6	60.8
0°-40°	1007.8	84.2
0°-60°	1185.8	99.0
0°-90°	1197.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1197.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1087	
5°	1080	103
15°	1014	282
25°	755	344
35°	450	279
45°	177	139
55°	40	39
65°	8	9
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P785930

CATALOG NUMBER: LERS6D05D010-EC6DR650210IC9050-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1087.3
2.5°	1086.5
5°	1080.4
7.5°	1076.9
10°	1067.2
12.5°	1047.4
15°	1014.5
17.5°	963.0
20°	898.5
22.5°	828.8
25°	755.1
27.5°	676.4
30°	600.1
32.5°	524.9
35°	449.8
37.5°	374.8
40°	303.6
42.5°	236.8
45°	177.0
47.5°	123.4
50°	83.9
52.5°	57.8
55°	39.8
57.5°	26.8
60°	18.2
62.5°	12.6
65°	8.5
67.5°	4.3
70°	2.9
72.5°	2.7
75°	2.4
77.5°	1.6
80°	1.1
82.5°	0.8
85°	0.5
87.5°	0.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)