

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785984

Luminaire Tested: LERS6D08D010-EC6DR150210IC9027-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P785984  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D08D010-EC6DR150210IC9027-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 751.3 lumens  
Efficiency: N/A  
Efficacy: 84.4 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P785984

CATALOG NUMBER: LERS6D08D010-EC6DR150210IC9027-6LBS1B

### Luminous Intensity Polar Plot

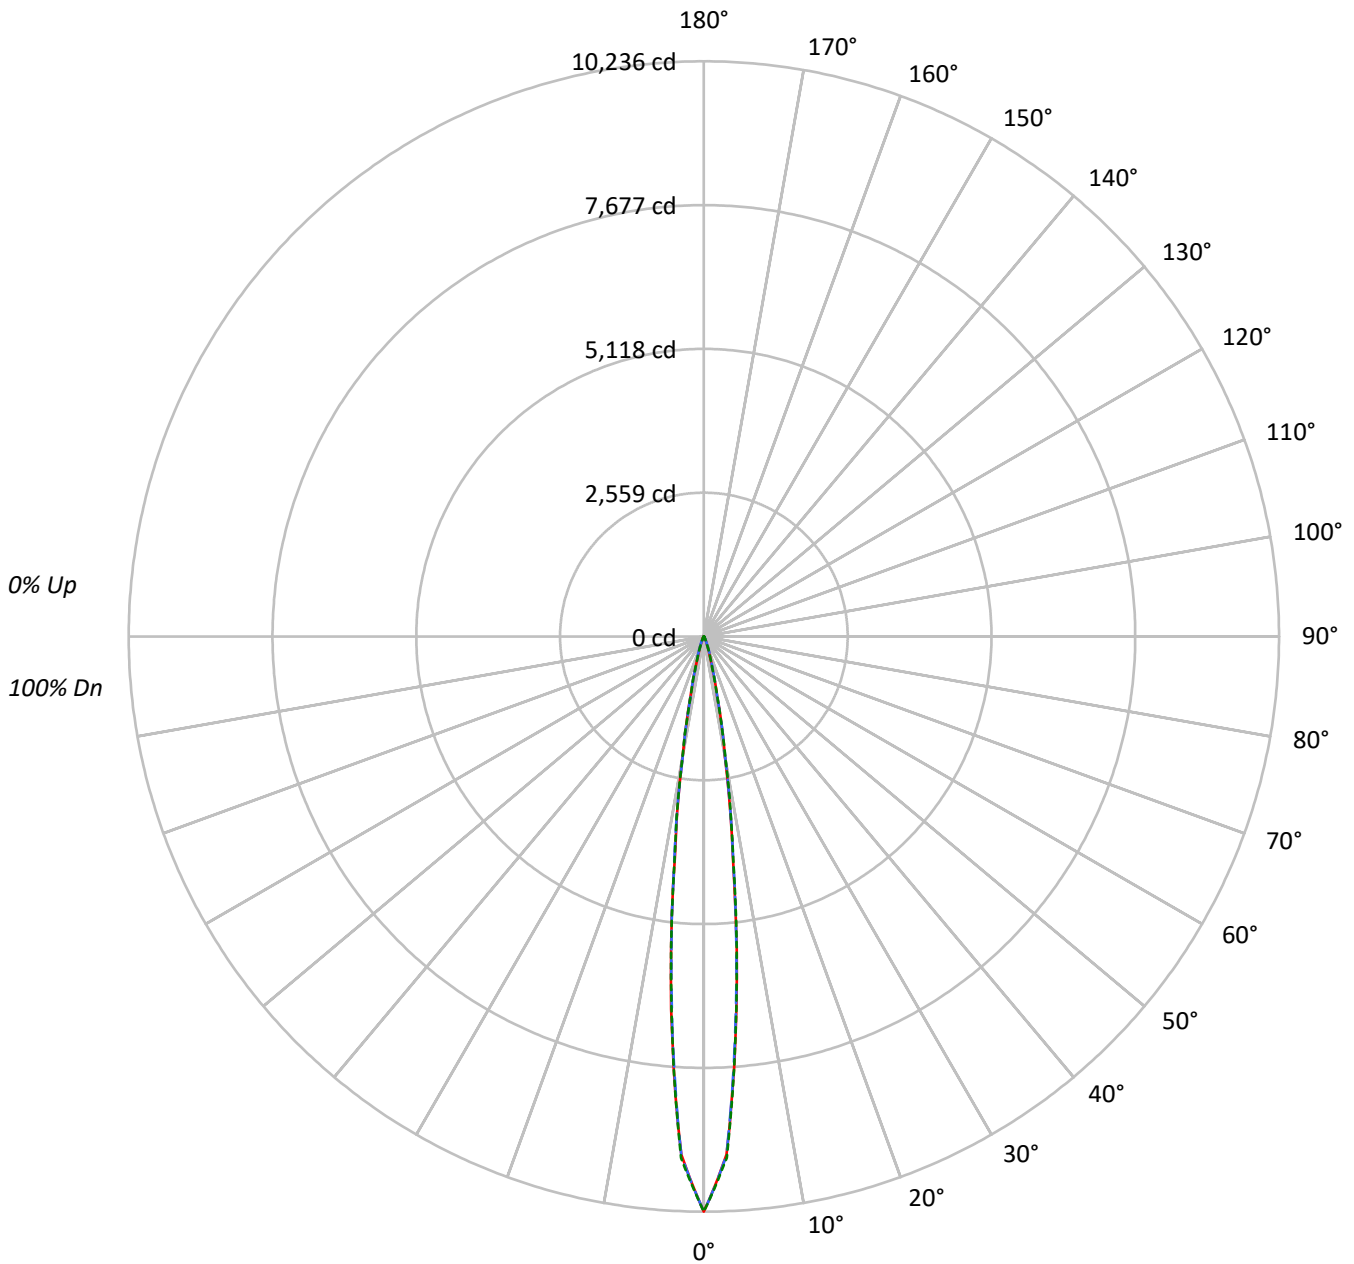



TEST NUMBER: P785984

CATALOG NUMBER: LERS6D08D010-EC6DR150210IC9027-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1151709	1151709	1151709
5°	676798	668037	673322
10°	201992	203411	206518
15°	50247	51219	49639
20°	15031	17412	15350
25°	5297	6754	5367
30°	1947	2561	1977
35°	973	1104	944
40°	618	675	618
45°	455	483	455
50°	362	362	362
55°	299	299	299
60°	246	246	246
65°	186	186	186
70°	161	161	161
75°	98	98	128
80°	71	71	71
85°	33	33	33

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 483 cd/sqm



TEST NUMBER: P785984

CATALOG NUMBER: LERS6D08D010-EC6DR150210IC9027-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	487.2	64.9
10°-20°	200.4	26.7
20°-30°	39.8	5.3
30°-40°	9.9	1.3
40°-50°	5.2	0.7
50°-60°	3.9	0.5
60°-70°	2.7	0.4
70°-80°	1.6	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	727.5	96.8
0°-40°	737.4	98.2
0°-60°	746.5	99.4
0°-90°	751.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	751.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	10236	10236	10236	10236	10236	
5°	6660	6591	6573	6619	6625	486
15°	578	589	590	579	572	198
25°	68	77	87	77	69	36
35°	13	14	15	14	13	9
45°	6	6	7	6	6	5
55°	4	4	4	4	4	4
65°	3	3	3	3	3	3
75°	1	1	1	1	2	2
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P785984

CATALOG NUMBER: LERS6D08D010-EC6DR150210IC9027-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	10235.6	10235.6	10235.6	10235.6	10235.6
2.5°	9232.9	9240.7	9243.7	9252.8	9286.6
5°	6659.5	6591.0	6573.3	6618.8	6625.3
7.5°	3944.8	3958.7	4009.4	4020.7	3979.9
10°	2164.8	2182.6	2180.0	2195.6	2213.3
12.5°	1107.1	1093.2	1088.9	1106.7	1082.0
15°	578.5	589.3	589.7	579.3	571.5
17.5°	311.1	323.7	344.5	327.6	301.6
20°	183.7	195.0	212.8	198.9	187.6
22.5°	113.5	122.6	135.2	124.4	115.3
25°	68.0	77.1	86.7	76.7	68.9
27.5°	40.3	48.1	54.2	47.7	39.9
30°	26.0	30.3	34.2	29.9	26.4
32.5°	18.2	19.9	21.7	19.9	18.2
35°	13.4	14.3	15.2	14.3	13.0
37.5°	10.4	11.3	11.7	10.8	10.0
40°	8.7	9.1	9.5	9.1	8.7
42.5°	7.4	7.8	7.8	7.8	7.4
45°	6.5	6.5	6.9	6.5	6.5
47.5°	5.6	5.6	6.1	5.6	5.6
50°	5.2	5.2	5.2	5.2	5.2
52.5°	4.8	4.8	4.8	4.8	4.8
55°	4.3	4.3	4.3	4.3	4.3
57.5°	3.9	3.9	3.9	3.9	3.9
60°	3.5	3.5	3.5	3.5	3.5
62.5°	3.0	3.0	3.0	3.0	3.0
65°	2.6	2.6	2.6	2.6	2.6
67.5°	2.6	2.6	2.6	2.6	2.6
70°	2.2	2.2	2.2	2.2	2.2
72.5°	1.7	1.7	1.7	1.7	1.7
75°	1.3	1.3	1.3	1.3	1.7
77.5°	1.3	1.3	1.3	1.3	1.3
80°	0.9	0.9	0.9	0.9	0.9
82.5°	0.9	0.9	0.9	0.9	0.9
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)