

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P786019

Luminaire Tested: LERS6D08D010-EC6DR200210IC9035-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P786019
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS6D08D010-EC6DR200210IC9035-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 869.7 lumens
Efficiency: N/A
Efficacy: 97.7 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P786019

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9035-6LBS1MW

Luminous Intensity Polar Plot

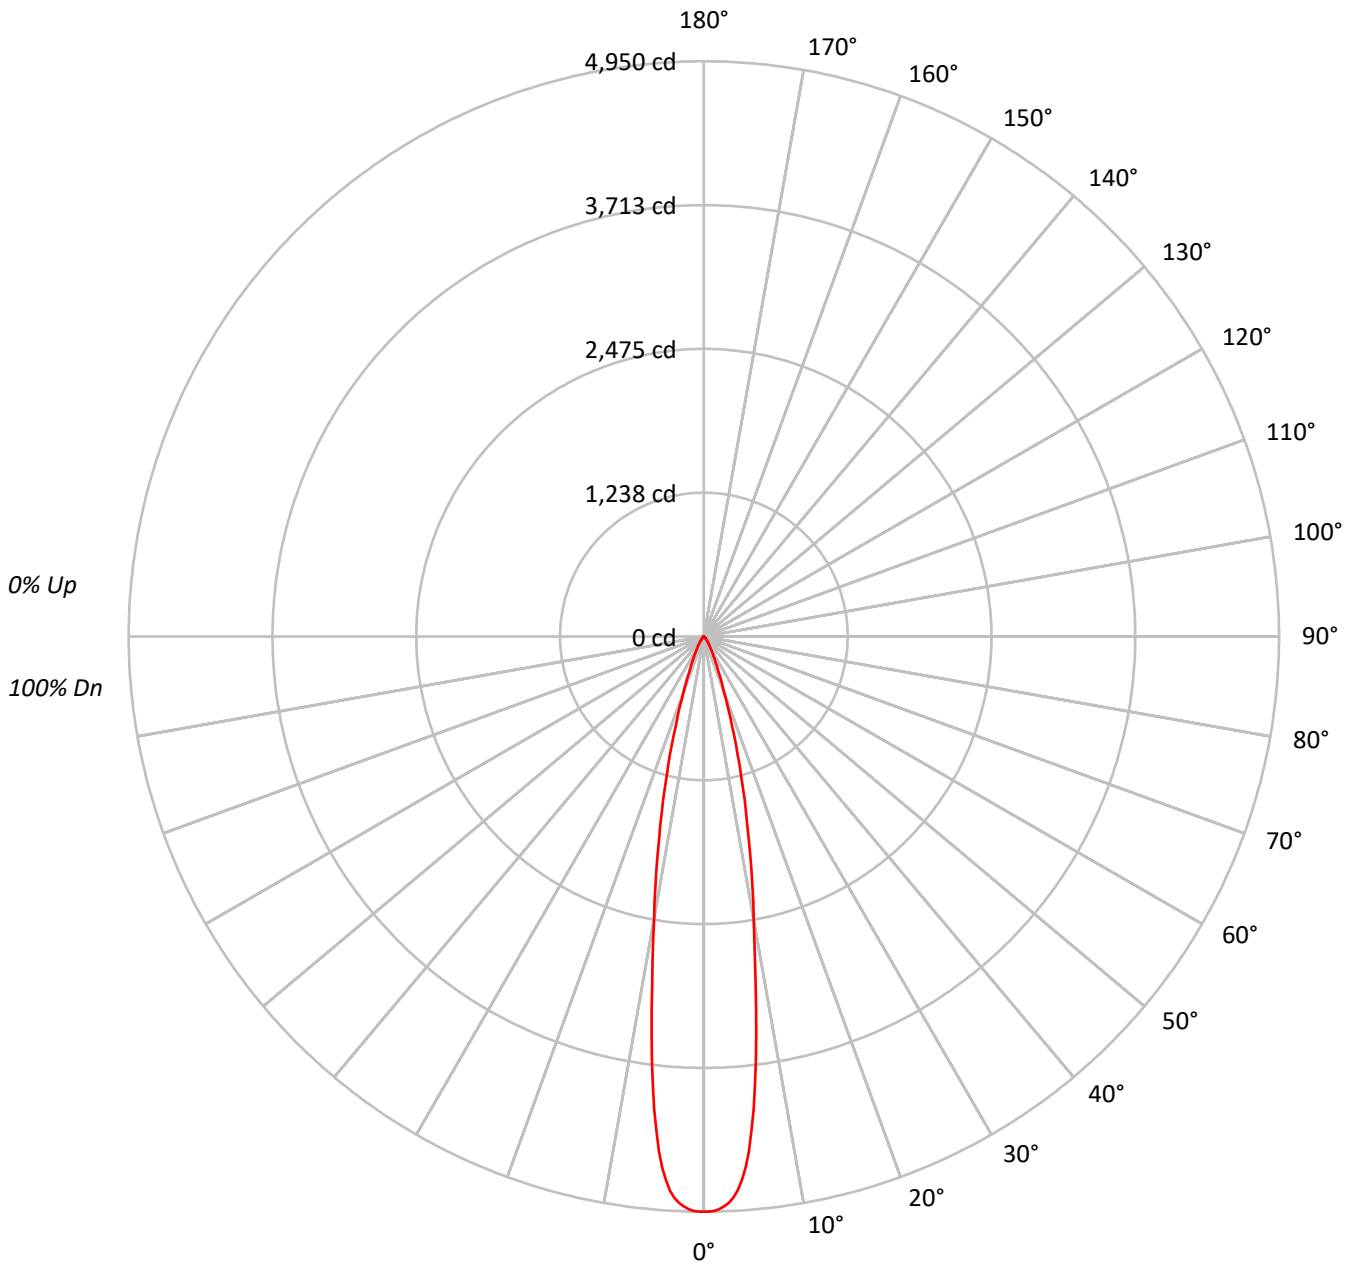



TEST NUMBER: P786019

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9035-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | 100 | | | | | | | | | | | | | | | |
| 1 | 115 | 113 | 111 | 109 | 113 | 111 | 109 | 108 | 107 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 97 | 98 | 98 | 97 | | | | | | | | | | | | | | | |
| 2 | 111 | 108 | 105 | 102 | 109 | 106 | 104 | 101 | 103 | 101 | 99 | 100 | 99 | 97 | 98 | 96 | 95 | 94 | 94 | 98 | 96 | 95 | | | | | | | | | | | | | | | |
| 3 | 108 | 103 | 100 | 97 | 106 | 102 | 99 | 96 | 100 | 97 | 95 | 97 | 95 | 93 | 95 | 93 | 92 | 91 | 91 | 95 | 93 | 92 | | | | | | | | | | | | | | | |
| 4 | 105 | 99 | 96 | 93 | 103 | 98 | 95 | 92 | 96 | 93 | 91 | 95 | 92 | 90 | 93 | 91 | 89 | 88 | 88 | 93 | 91 | 89 | | | | | | | | | | | | | | | |
| 5 | 102 | 96 | 92 | 89 | 100 | 95 | 91 | 89 | 94 | 90 | 88 | 92 | 89 | 87 | 91 | 88 | 86 | 85 | 85 | 91 | 88 | 86 | | | | | | | | | | | | | | | |
| 6 | 99 | 93 | 89 | 86 | 98 | 92 | 88 | 86 | 91 | 87 | 85 | 90 | 87 | 84 | 88 | 86 | 84 | 83 | 83 | 88 | 86 | 84 | | | | | | | | | | | | | | | |
| 7 | 96 | 90 | 86 | 83 | 95 | 89 | 86 | 83 | 88 | 85 | 82 | 87 | 84 | 82 | 86 | 84 | 82 | 81 | 81 | 86 | 84 | 82 | | | | | | | | | | | | | | | |
| 8 | 94 | 87 | 83 | 81 | 93 | 87 | 83 | 80 | 86 | 83 | 80 | 85 | 82 | 80 | 84 | 82 | 80 | 79 | 79 | 84 | 82 | 80 | | | | | | | | | | | | | | | |
| 9 | 91 | 85 | 81 | 78 | 91 | 85 | 81 | 78 | 84 | 80 | 78 | 83 | 80 | 78 | 82 | 80 | 78 | 77 | 77 | 82 | 80 | 78 | | | | | | | | | | | | | | | |
| 10 | 89 | 83 | 79 | 76 | 88 | 82 | 79 | 76 | 82 | 78 | 76 | 81 | 78 | 76 | 81 | 78 | 76 | 75 | 75 | 81 | 78 | 76 | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 540852 |
| 5° | 487947 |
| 10° | 273860 |
| 15° | 139211 |
| 20° | 58939 |
| 25° | 27209 |
| 30° | 14408 |
| 35° | 7763 |
| 40° | 4151 |
| 45° | 2457 |
| 50° | 1428 |
| 55° | 762 |
| 60° | 481 |
| 65° | 336 |
| 70° | 128 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2457 cd/sqm



TEST NUMBER: P786019

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9035-6LBS1MW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 352.4 | 40.5 |
| 10°-20° | 347.0 | 39.9 |
| 20°-30° | 113.4 | 13.0 |
| 30°-40° | 38.6 | 4.4 |
| 40°-50° | 13.0 | 1.5 |
| 50°-60° | 3.9 | 0.5 |
| 60°-70° | 1.3 | 0.1 |
| 70°-80° | 0.1 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 812.9 | 93.5 |
| 0°-40° | 851.5 | 97.9 |
| 0°-60° | 868.4 | 99.8 |
| 0°-90° | 869.7 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 869.7 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 4950 | |
| 5° | 4449 | 352 |
| 15° | 1231 | 347 |
| 25° | 226 | 113 |
| 35° | 58 | 39 |
| 45° | 16 | 13 |
| 55° | 4 | 4 |
| 65° | 1 | 1 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P786019

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9035-6LBS1MW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 4950.1 |
| 0.5° | 4950.1 |
| 1° | 4943.9 |
| 1.5° | 4931.6 |
| 2° | 4909.1 |
| 2.5° | 4879.1 |
| 3° | 4836.8 |
| 3.5° | 4777.7 |
| 4° | 4690.0 |
| 4.5° | 4583.4 |
| 5° | 4448.9 |
| 5.5° | 4272.2 |
| 6° | 4091.0 |
| 6.5° | 3883.4 |
| 7° | 3680.2 |
| 7.5° | 3442.1 |
| 8° | 3229.7 |
| 8.5° | 3015.9 |
| 9° | 2818.4 |
| 9.5° | 2637.3 |
| 10° | 2468.4 |
| 12.5° | 1772.4 |
| 15° | 1230.7 |
| 17.5° | 804.0 |
| 20° | 506.9 |
| 22.5° | 328.4 |
| 25° | 225.7 |
| 27.5° | 158.7 |
| 30° | 114.2 |
| 32.5° | 82.0 |
| 35° | 58.2 |
| 37.5° | 40.6 |
| 40° | 29.1 |
| 42.5° | 21.2 |
| 45° | 15.9 |
| 47.5° | 12.3 |
| 50° | 8.4 |
| 52.5° | 5.3 |
| 55° | 4.0 |
| 57.5° | 3.1 |
| 60° | 2.2 |
| 62.5° | 1.8 |
| 65° | 1.3 |



TEST NUMBER: P786019

CATALOG NUMBER: LERS6D08D010-EC6DR200210IC9035-6LBS1MW

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|-----|
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



| | | |
|-------|--|-----|
| 67.5° | | 0.9 |
| 70° | | 0.4 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)