Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P786047

Luminaire Tested: LERS6D08D010-EC6DR250210IC9040-6LBS1MW

Issue Date: 2/2/2024

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Test Information

Test Method:	LM-79-2019
Report Number:	P786047
	TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab:	COOPER LIGHTING SOLUTIONS
Issue Date:	2/2/2024
Manufacturer:	COOPER LIGHTING SOLUTIONS
Product Line:	PORTFOLIO
Catalog Number:	LERS6D08D010-EC6DR250210IC9040-6LBS1MW
Description:	6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 25° OPTIC
Light Source:	(1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver:	-

Summary

Lumens per Lamp:	N/A
Luminaire Lumens:	1315.4 lumens
Efficiency:	N/A
Efficacy:	147.8 lumens/watt
Spacing Criteria (0/90/45):	0.42 / 0.42 / 0.45
Luminous Opening:	Circular (Dia: 0.35' x H: 0')
CIE Type:	Direct

Input Watts (W):	8.9
Input Voltage (V):	NR
Input Current (Ain):	NR
Voltage Rise (V):	NR
Power Factor:	NR
Total Harmonic Distortion (THDi):	NR
Frequency (hertz):	60
Stabilization Time:	NR
Operation Time:	NR
Ambient Temperature (°C):	NR
Test Distance:	24 FT

Downlight

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P786047
CATALOG NUMBER: LERS6D08D010-EC6DR250210IC9040-6LBS1MW

Luminous Intensity Polar Plot

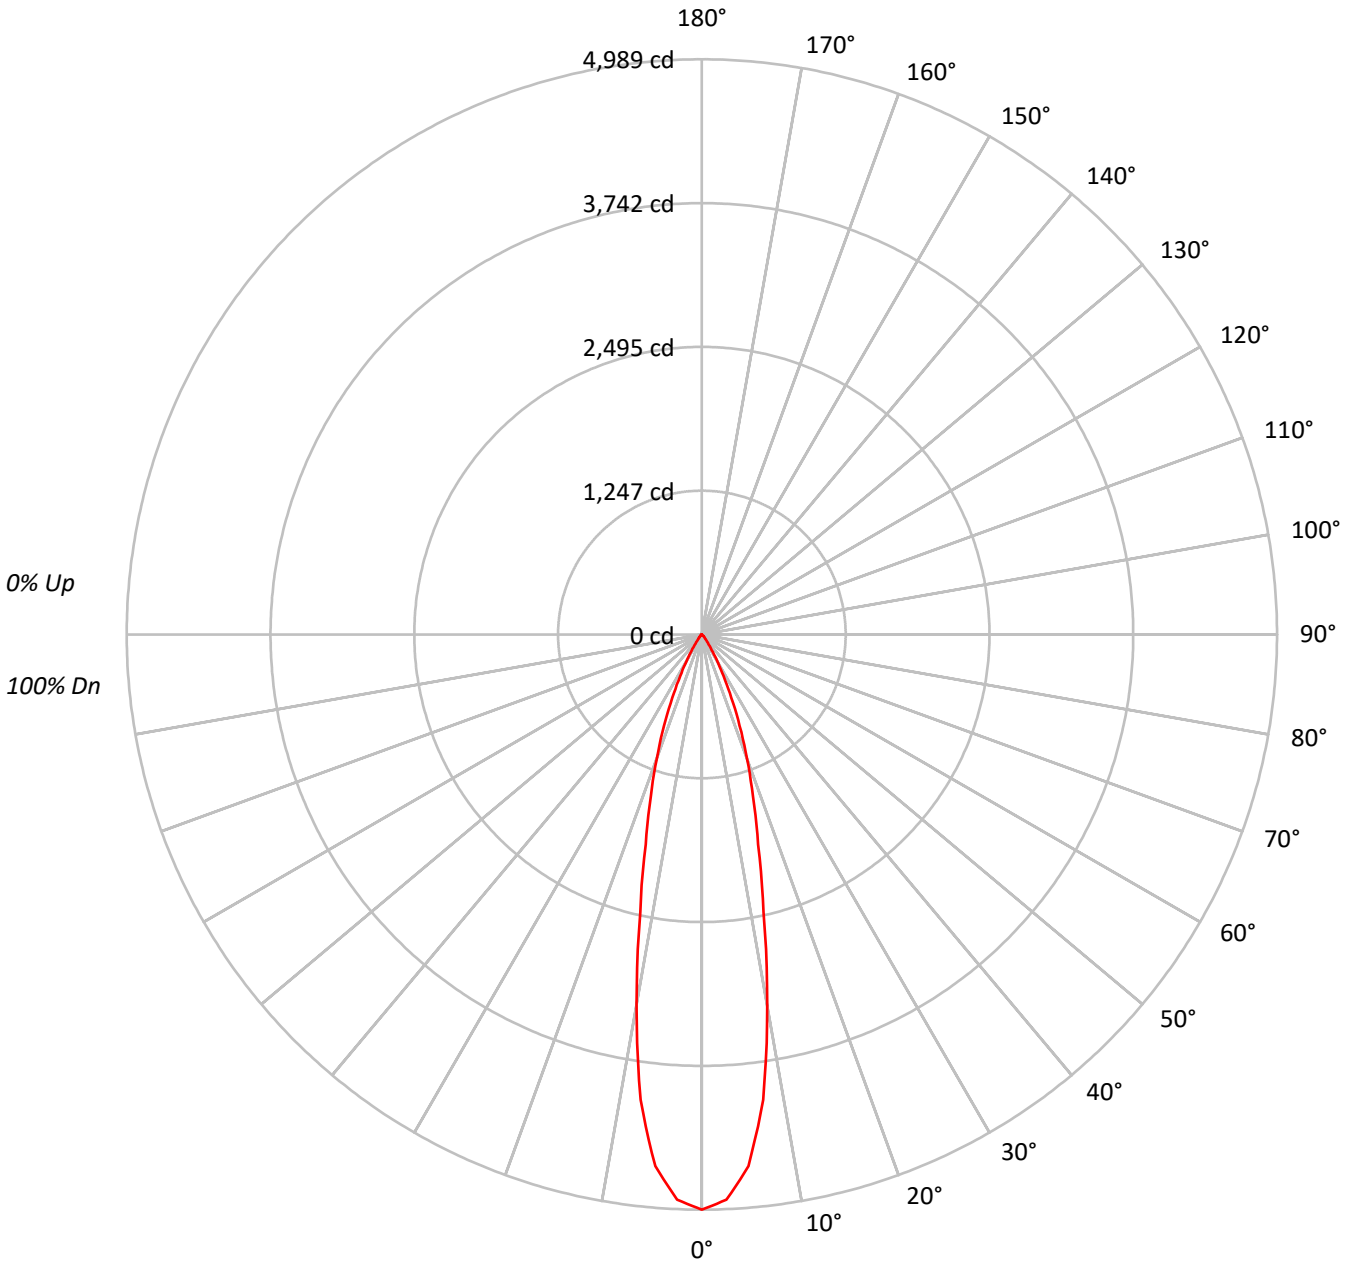

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P786047
CATALOG NUMBER: LERS6D08D010-EC6DR250210IC9040-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	545102
5°	507689
10°	362151
15°	213290
20°	132714
25°	72828
30°	33307
35°	12618
40°	5719
45°	3430
50°	1428
55°	914
60°	634
65°	440
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3430 cd/sqm

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P786047
CATALOG NUMBER: LERS6D08D010-EC6DR250210IC9040-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	397.8	30.2
10°-20°	538.8	41.0
20°-30°	285.1	21.7
30°-40°	70.4	5.4
40°-50°	17.2	1.3
50°-60°	4.5	0.3
60°-70°	1.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1221.8	92.9
0°-40°	1292.1	98.2
0°-60°	1313.8	99.9
0°-90°	1315.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1315.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4989	
5°	4629	398
15°	1886	539
25°	604	285
35°	95	70
45°	22	17
55°	5	5
65°	2	2
75°	0	0
85°	0	0
90°	0	

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P786047
CATALOG NUMBER: LERS6D08D010-EC6DR250210IC9040-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	4989.0
2.5°	4907.0
5°	4628.9
7.5°	4070.3
10°	3264.2
12.5°	2467.5
15°	1885.6
17.5°	1469.6
20°	1141.4
22.5°	856.0
25°	604.1
27.5°	405.1
30°	264.0
32.5°	160.6
35°	94.6
37.5°	57.9
40°	40.1
42.5°	30.6
45°	22.2
47.5°	13.4
50°	8.4
52.5°	6.1
55°	4.8
57.5°	3.8
60°	2.9
62.5°	2.3
65°	1.7
67.5°	0.6
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Report Generated By 670245859 / DESKTOP-T8S5UU9

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

0°-180°

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

(END OF REPORT)