

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P786233

Luminaire Tested: LERS6D08D010-EC6DR650210IC9035-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P786233
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS6D08D010-EC6DR650210IC9035-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1321.2 lumens
Efficiency: N/A
Efficacy: 148.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P786233

CATALOG NUMBER: LERS6D08D010-EC6DR650210IC9035-6LBS1H

Luminous Intensity Polar Plot

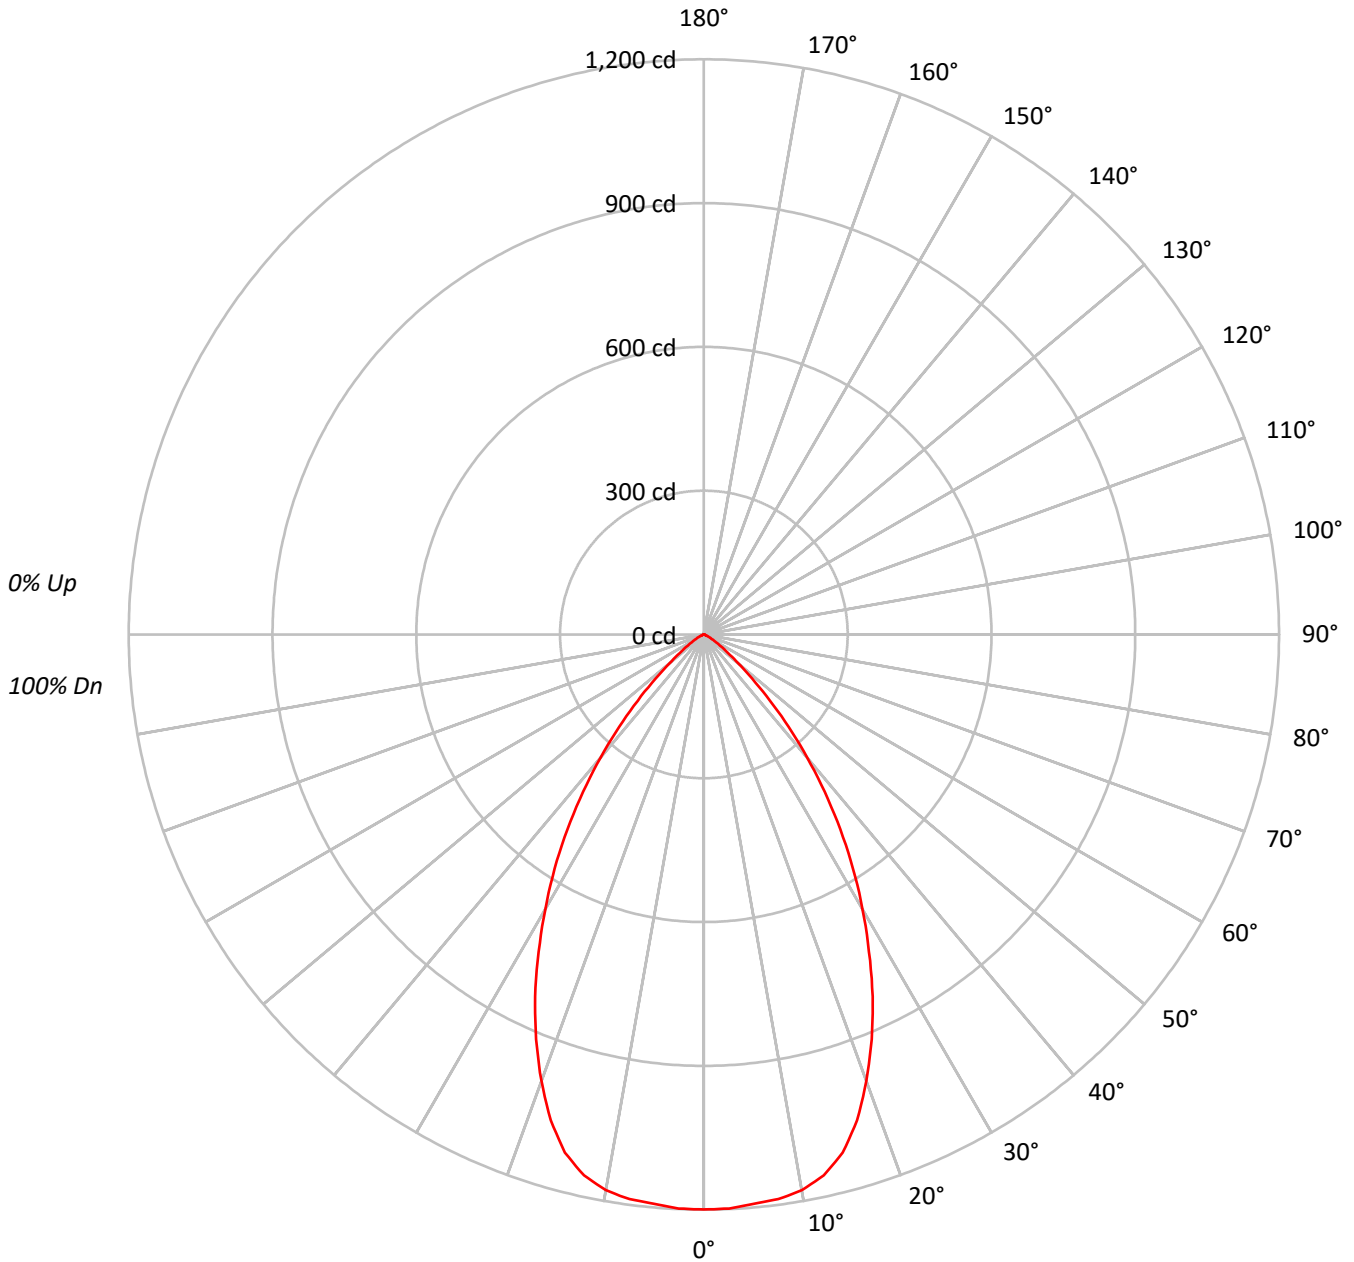



TEST NUMBER: P786233

CATALOG NUMBER: LERS6D08D010-EC6DR650210IC9035-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	70061
5°	69889
10°	69826
15°	67678
20°	61611
25°	53686
30°	44651
35°	35385
40°	25533
45°	16131
50°	8414
55°	4470
60°	2348
65°	1285
70°	546
75°	587
80°	404
85°	335

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16131 cd/sqm



TEST NUMBER: P786233

CATALOG NUMBER: LERS6D08D010-EC6DR650210IC9035-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	113.4	8.6
10°-20°	310.7	23.5
20°-30°	379.7	28.7
30°-40°	308.1	23.3
40°-50°	153.5	11.6
50°-60°	42.8	3.2
60°-70°	9.7	0.7
70°-80°	2.5	0.2
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	803.8	60.8
0°-40°	1112.0	84.2
0°-60°	1308.3	99.0
0°-90°	1321.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1321.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1200	
5°	1192	113
15°	1119	311
25°	833	380
35°	496	308
45°	195	154
55°	44	43
65°	9	10
75°	3	3
85°	0	1
90°	0	



TEST NUMBER: P786233

CATALOG NUMBER: LERS6D08D010-EC6DR650210IC9035-6LBS1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1199.6
2.5°	1198.8
5°	1192.1
7.5°	1188.2
10°	1177.4
12.5°	1155.6
15°	1119.3
17.5°	1062.5
20°	991.3
22.5°	914.4
25°	833.1
27.5°	746.2
30°	662.1
32.5°	579.1
35°	496.3
37.5°	413.6
40°	334.9
42.5°	261.3
45°	195.3
47.5°	136.1
50°	92.6
52.5°	63.8
55°	43.9
57.5°	29.6
60°	20.1
62.5°	13.9
65°	9.3
67.5°	4.8
70°	3.2
72.5°	3.0
75°	2.6
77.5°	1.8
80°	1.2
82.5°	0.9
85°	0.5
87.5°	0.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)