

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P786447

Luminaire Tested: LERS6D10D010-EC6DR450210IC9030-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P786447  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D10D010-EC6DR450210IC9030-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1857.0 lumens  
Efficiency: N/A  
Efficacy: 158.7 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P786447

CATALOG NUMBER: LERS6D10D010-EC6DR450210IC9030-6LBS1MW

### Luminous Intensity Polar Plot

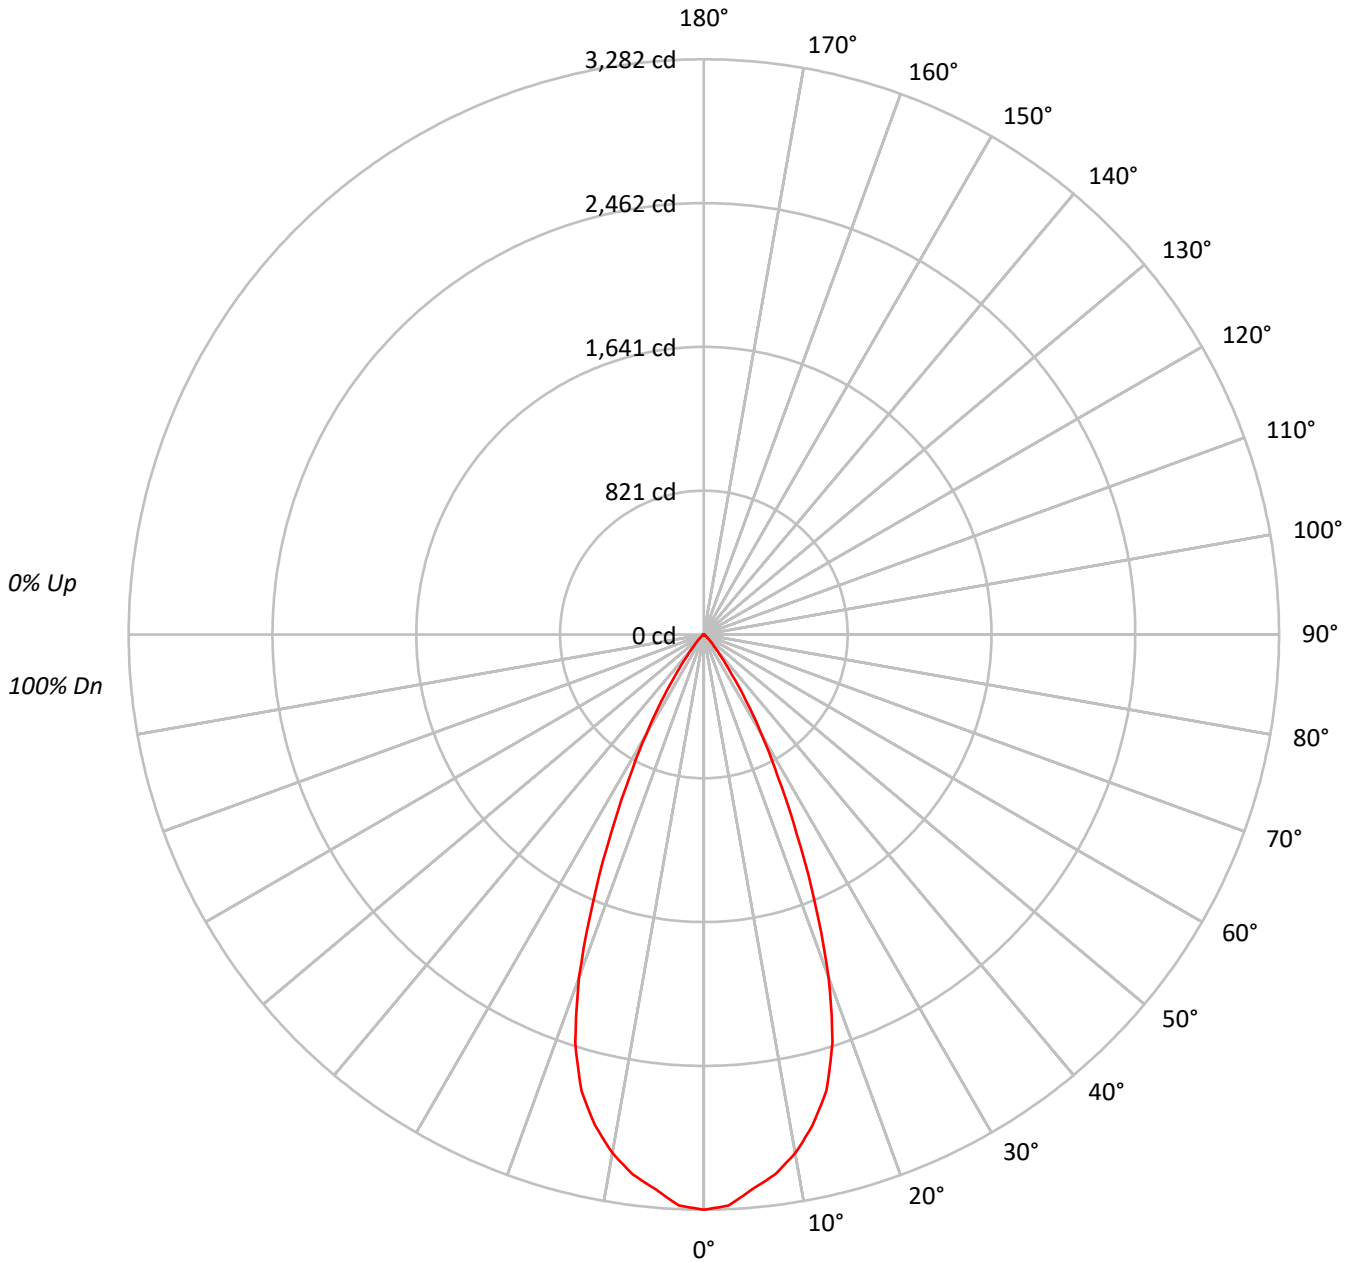



TEST NUMBER: P786447

CATALOG NUMBER: LERS6D10D010-EC6DR450210IC9030-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95																											
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90																											
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85																											
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81																											
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77																											
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73																											
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69																											
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66																											
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63																											
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	358627
5°	348414
10°	333338
15°	305071
20°	242034
25°	151105
30°	83280
35°	37401
40°	14734
45°	6938
50°	3298
55°	1714
60°	852
65°	207
70°	96
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6938 cd/sqm



TEST NUMBER: P786447

CATALOG NUMBER: LERS6D10D010-EC6DR450210IC9030-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	298.5	16.1
10°-20°	734.6	39.6
20°-30°	581.7	31.3
30°-40°	193.7	10.4
40°-50°	38.4	2.1
50°-60°	8.7	0.5
60°-70°	1.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1614.8	87.0
0°-40°	1808.5	97.4
0°-60°	1855.7	99.9
0°-90°	1857.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1857.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3282	
5°	3177	298
15°	2697	735
25°	1253	582
35°	280	194
45°	45	38
55°	9	9
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P786447

CATALOG NUMBER: LERS6D10D010-EC6DR450210IC9030-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3282.3
2.5°	3260.9
5°	3176.7
7.5°	3107.3
10°	3004.5
12.5°	2867.7
15°	2697.0
17.5°	2440.4
20°	2081.6
22.5°	1654.1
25°	1253.4
27.5°	917.8
30°	660.1
32.5°	448.9
35°	280.4
37.5°	166.3
40°	103.3
42.5°	67.9
45°	44.9
47.5°	28.9
50°	19.4
52.5°	12.9
55°	9.0
57.5°	5.9
60°	3.9
62.5°	2.1
65°	0.8
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)