

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P786678

Luminaire Tested: LERS6D15D010-EC6DR300215IC9027-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P786678  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D15D010-EC6DR300215IC9027-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2547.9 lumens  
Efficiency: N/A  
Efficacy: 161.3 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P786678

CATALOG NUMBER: LERS6D15D010-EC6DR300215IC9027-6LBS1LI

### Luminous Intensity Polar Plot

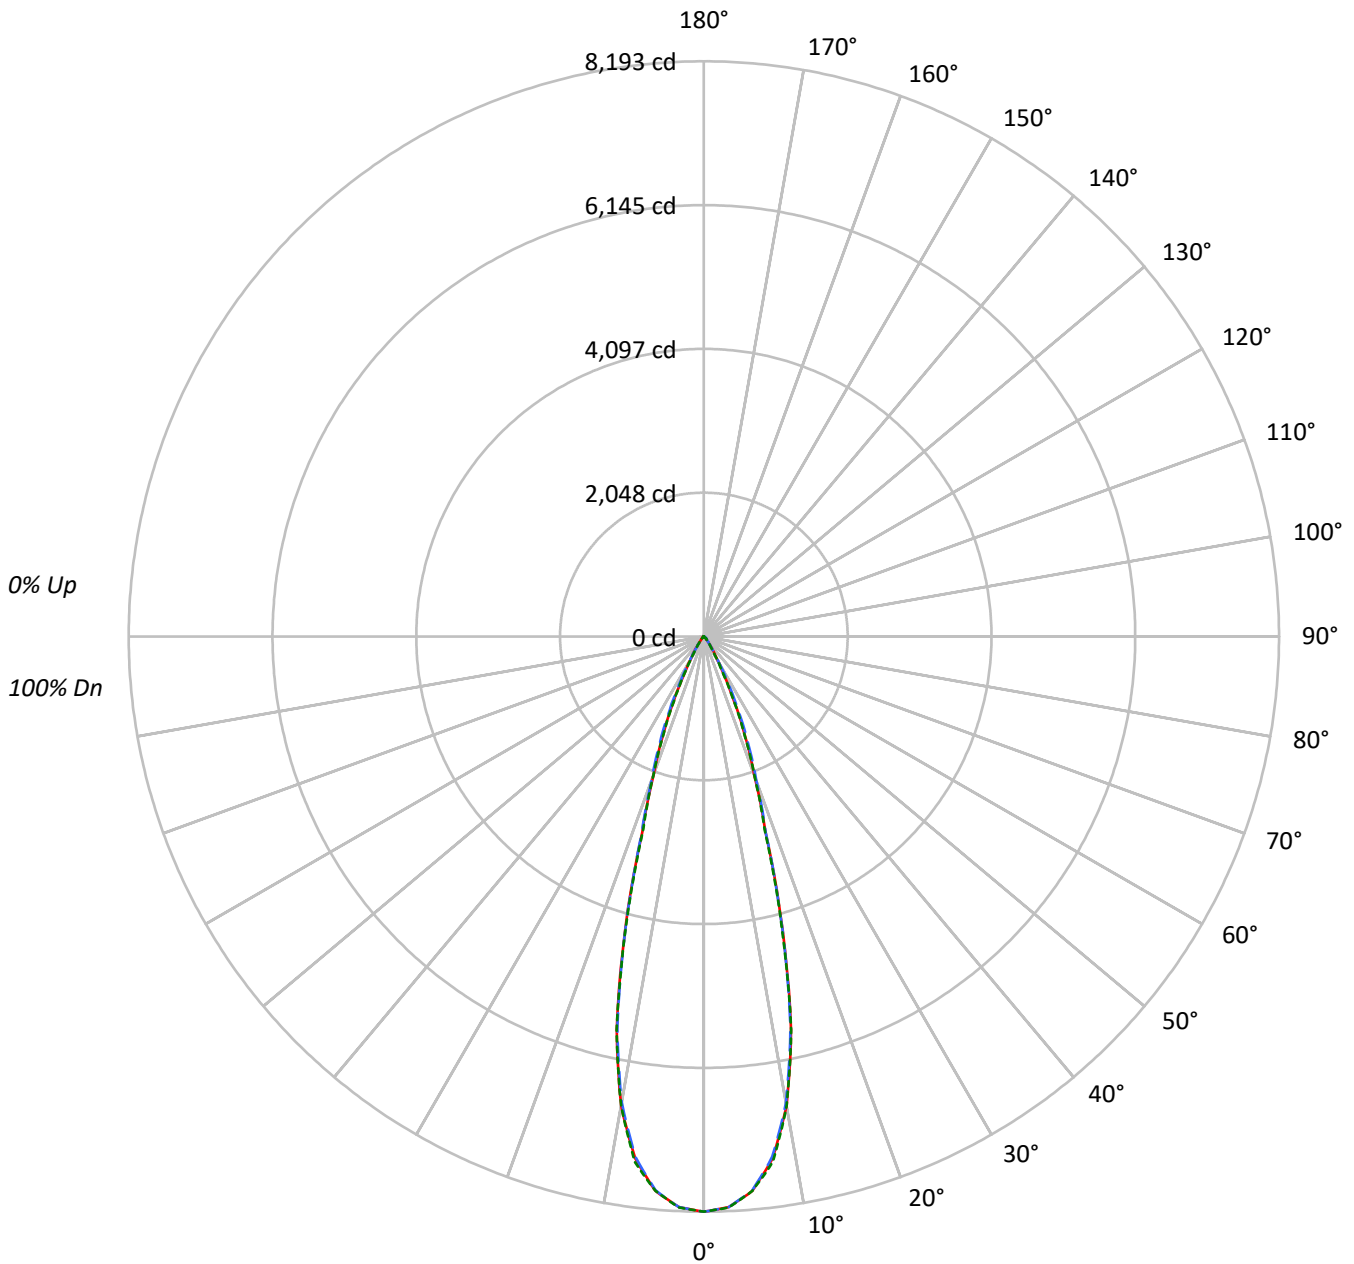



TEST NUMBER: P786678

CATALOG NUMBER: LERS6D15D010-EC6DR300215IC9027-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	627105	627105	627105
5°	609100	608393	609131
10°	527576	523853	527452
15°	344218	342364	340644
20°	171163	177582	170935
25°	86221	97226	84456
30°	34523	37617	30077
35°	16016	15334	12858
40°	6914	7674	6515
45°	4882	6051	4925
50°	1679	4406	1774
55°	961	1828	1014
60°	674	796	674
65°	435	435	435
70°	269	179	269
75°	0	118	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 6051 cd/sqm



TEST NUMBER: P786678

CATALOG NUMBER: LERS6D15D010-EC6DR300215IC9027-6LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	720.4	28.3
10°-20°	1160.3	45.5
20°-30°	501.4	19.7
30°-40°	114.3	4.5
40°-50°	39.2	1.5
50°-60°	9.6	0.4
60°-70°	2.5	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2382.1	93.5
0°-40°	2496.3	98.0
0°-60°	2545.2	99.9
0°-90°	2547.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2547.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	8193	8193	8193	8193	8193	
5°	7927	7920	7918	7934	7928	721
15°	4344	4292	4320	4306	4299	1163
25°	1021	1060	1151	1032	1000	489
35°	171	175	164	163	138	116
45°	45	56	56	56	46	32
55°	7	8	14	8	8	7
65°	2	2	2	2	2	2
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P786678

CATALOG NUMBER: LERS6D15D010-EC6DR300215IC9027-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	8192.8	8192.8	8192.8	8192.8	8192.8
2.5°	8138.5	8132.8	8136.1	8140.1	8141.7
5°	7927.3	7919.7	7918.1	7934.5	7927.7
7.5°	7501.3	7490.5	7474.0	7511.4	7546.4
10°	6787.8	6775.7	6739.9	6757.6	6786.2
12.5°	5734.3	5695.3	5694.5	5750.8	5743.2
15°	4343.8	4291.5	4320.4	4306.4	4298.7
17.5°	2921.1	2900.9	2939.6	2927.9	2877.6
20°	2101.3	2106.5	2180.1	2143.1	2098.5
22.5°	1533.3	1552.2	1639.5	1544.2	1509.2
25°	1020.9	1059.5	1151.2	1032.5	1000.0
27.5°	627.9	645.6	738.5	619.8	602.2
30°	390.6	381.7	425.6	365.2	340.3
32.5°	256.2	245.0	259.0	232.5	212.4
35°	171.4	175.0	164.1	162.9	137.6
37.5°	107.0	123.1	108.6	115.8	88.5
40°	69.2	89.3	76.8	84.9	65.2
42.5°	56.7	68.8	63.2	67.2	57.9
45°	45.1	55.9	55.9	55.9	45.5
47.5°	24.9	37.4	47.9	38.2	26.5
50°	14.1	18.9	37.0	19.7	14.9
52.5°	9.7	10.9	25.3	11.3	10.1
55°	7.2	7.6	13.7	8.0	7.6
57.5°	5.6	6.0	7.2	6.0	5.6
60°	4.4	4.4	5.2	4.8	4.4
62.5°	3.2	3.2	3.6	3.2	3.2
65°	2.4	2.4	2.4	2.4	2.4
67.5°	1.2	1.6	1.6	1.6	1.6
70°	1.2	0.8	0.8	0.8	1.2
72.5°	0.8	0.4	0.4	0.4	0.4
75°	0.0	0.0	0.4	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)