

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P786841

Luminaire Tested: LERS6D15D010-EC6DR650215IC9030-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P786841  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LERS6D15D010-EC6DR650215IC9030-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2087.4 lumens  
Efficiency: N/A  
Efficacy: 132.1 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P786841

CATALOG NUMBER: LERS6D15D010-EC6DR650215IC9030-6LBS1B

### Luminous Intensity Polar Plot

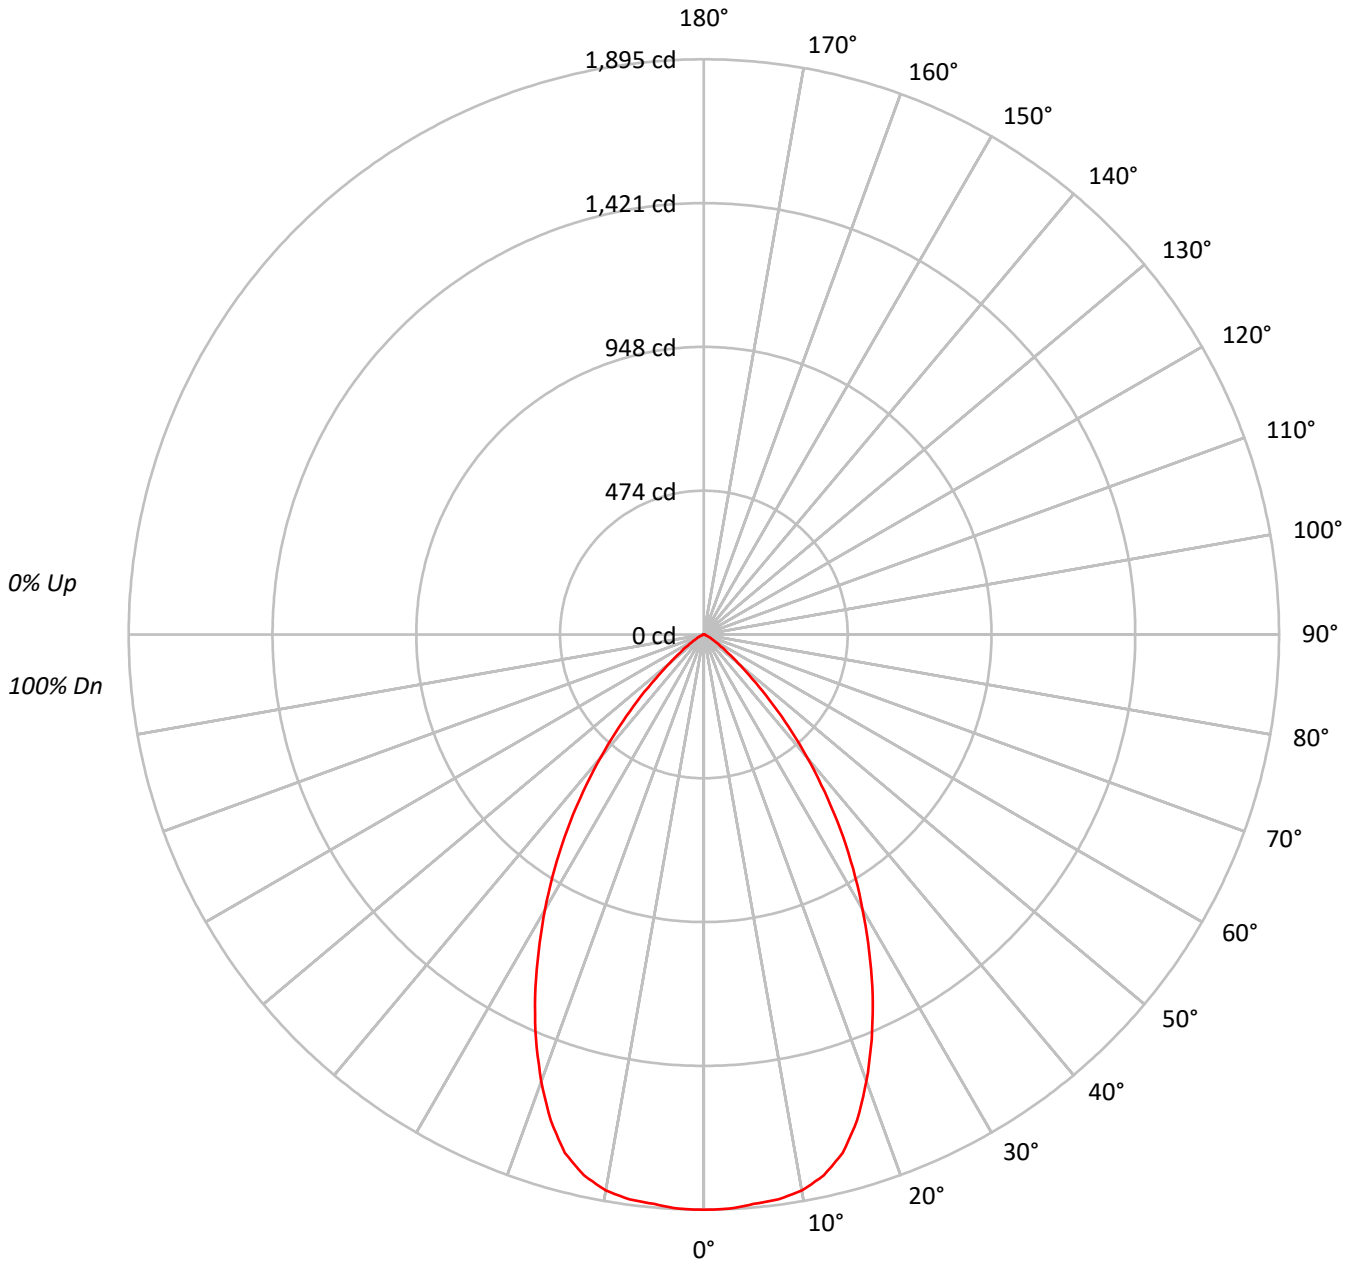



TEST NUMBER: P786841

CATALOG NUMBER: LERS6D15D010-EC6DR650215IC9030-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	110693
5°	110418
10°	110319
15°	106919
20°	97336
25°	84824
30°	70548
35°	55898
40°	40347
45°	25489
50°	13284
55°	7067
60°	3714
65°	2045
70°	854
75°	948
80°	639
85°	536

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 25489 cd/sqm



TEST NUMBER: P786841

CATALOG NUMBER: LERS6D15D010-EC6DR650215IC9030-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	179.2	8.6
10°-20°	490.8	23.5
20°-30°	600.0	28.7
30°-40°	486.8	23.3
40°-50°	242.6	11.6
50°-60°	67.7	3.2
60°-70°	15.4	0.7
70°-80°	4.0	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1270.0	60.8
0°-40°	1756.8	84.2
0°-60°	2067.0	99.0
0°-90°	2087.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2087.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1895	
5°	1883	179
15°	1768	491
25°	1316	600
35°	784	487
45°	309	243
55°	69	68
65°	15	15
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P786841

CATALOG NUMBER: LERS6D15D010-EC6DR650215IC9030-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1895.3
2.5°	1894.0
5°	1883.4
7.5°	1877.2
10°	1860.2
12.5°	1825.7
15°	1768.3
17.5°	1678.7
20°	1566.1
22.5°	1444.7
25°	1316.3
27.5°	1179.0
30°	1046.1
32.5°	914.9
35°	784.0
37.5°	653.4
40°	529.2
42.5°	412.8
45°	308.6
47.5°	215.0
50°	146.2
52.5°	100.8
55°	69.4
57.5°	46.8
60°	31.8
62.5°	22.0
65°	14.8
67.5°	7.5
70°	5.0
72.5°	4.7
75°	4.2
77.5°	2.8
80°	1.9
82.5°	1.4
85°	0.8
87.5°	0.6
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)