

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787211

Luminaire Tested: LER6D02D010-EC6DR400210IC9050-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P787211  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D02D010-EC6DR400210IC9050-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 699.9 lumens  
Efficiency: N/A  
Efficacy: 137.2 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P787211  
CATALOG NUMBER: LER6D02D010-EC6DR400210IC9050-6LBS1B

### Luminous Intensity Polar Plot

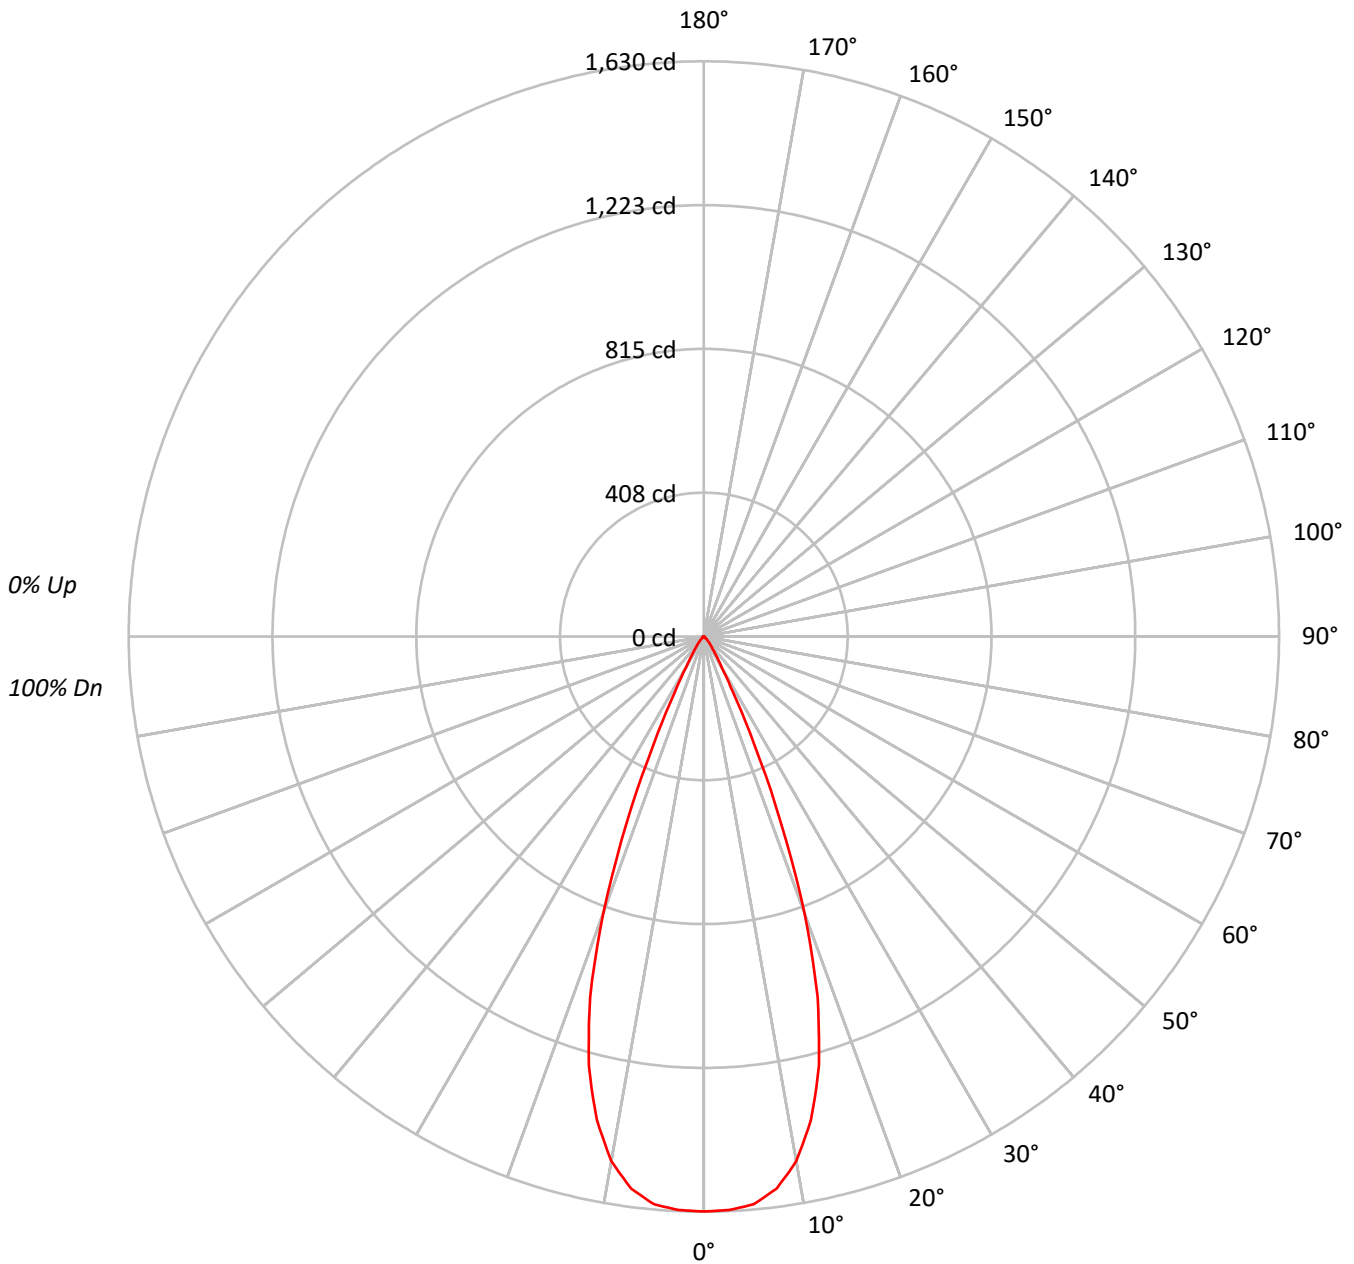



TEST NUMBER: P787211

CATALOG NUMBER: LER6D02D010-EC6DR400210IC9050-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	178040
5°	177174
10°	167473
15°	142378
20°	97041
25°	40483
30°	12730
35°	5922
40°	3266
45°	1499
50°	731
55°	400
60°	219
65°	78
70°	32
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1499 cd/sqm



TEST NUMBER: P787211

CATALOG NUMBER: LER6D02D010-EC6DR400210IC9050-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	150.8	21.6
10°-20°	337.9	48.3
20°-30°	169.1	24.2
30°-40°	31.0	4.4
40°-50°	8.6	1.2
50°-60°	2.0	0.3
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	657.9	94.0
0°-40°	688.9	98.4
0°-60°	699.5	99.9
0°-90°	699.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	699.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1630	
5°	1615	151
15°	1259	338
25°	336	169
35°	44	31
45°	10	9
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P787211

CATALOG NUMBER: LER6D02D010-EC6DR400210IC9050-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1629.5
2.5°	1627.1
5°	1615.4
7.5°	1578.1
10°	1509.5
12.5°	1402.5
15°	1258.7
17.5°	1071.6
20°	834.6
22.5°	569.0
25°	335.8
27.5°	177.5
30°	100.9
32.5°	65.2
35°	44.4
37.5°	31.7
40°	22.9
42.5°	15.7
45°	9.7
47.5°	6.2
50°	4.3
52.5°	3.0
55°	2.1
57.5°	1.3
60°	1.0
62.5°	0.6
65°	0.3
67.5°	0.2
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)