

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787233

Luminaire Tested: LER6D02D010-EC6DR450210IC9030-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P787233
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D02D010-EC6DR450210IC9030-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 680.3 lumens
Efficiency: N/A
Efficacy: 133.4 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P787233

CATALOG NUMBER: LER6D02D010-EC6DR450210IC9030-6LBDP1LI

Luminous Intensity Polar Plot

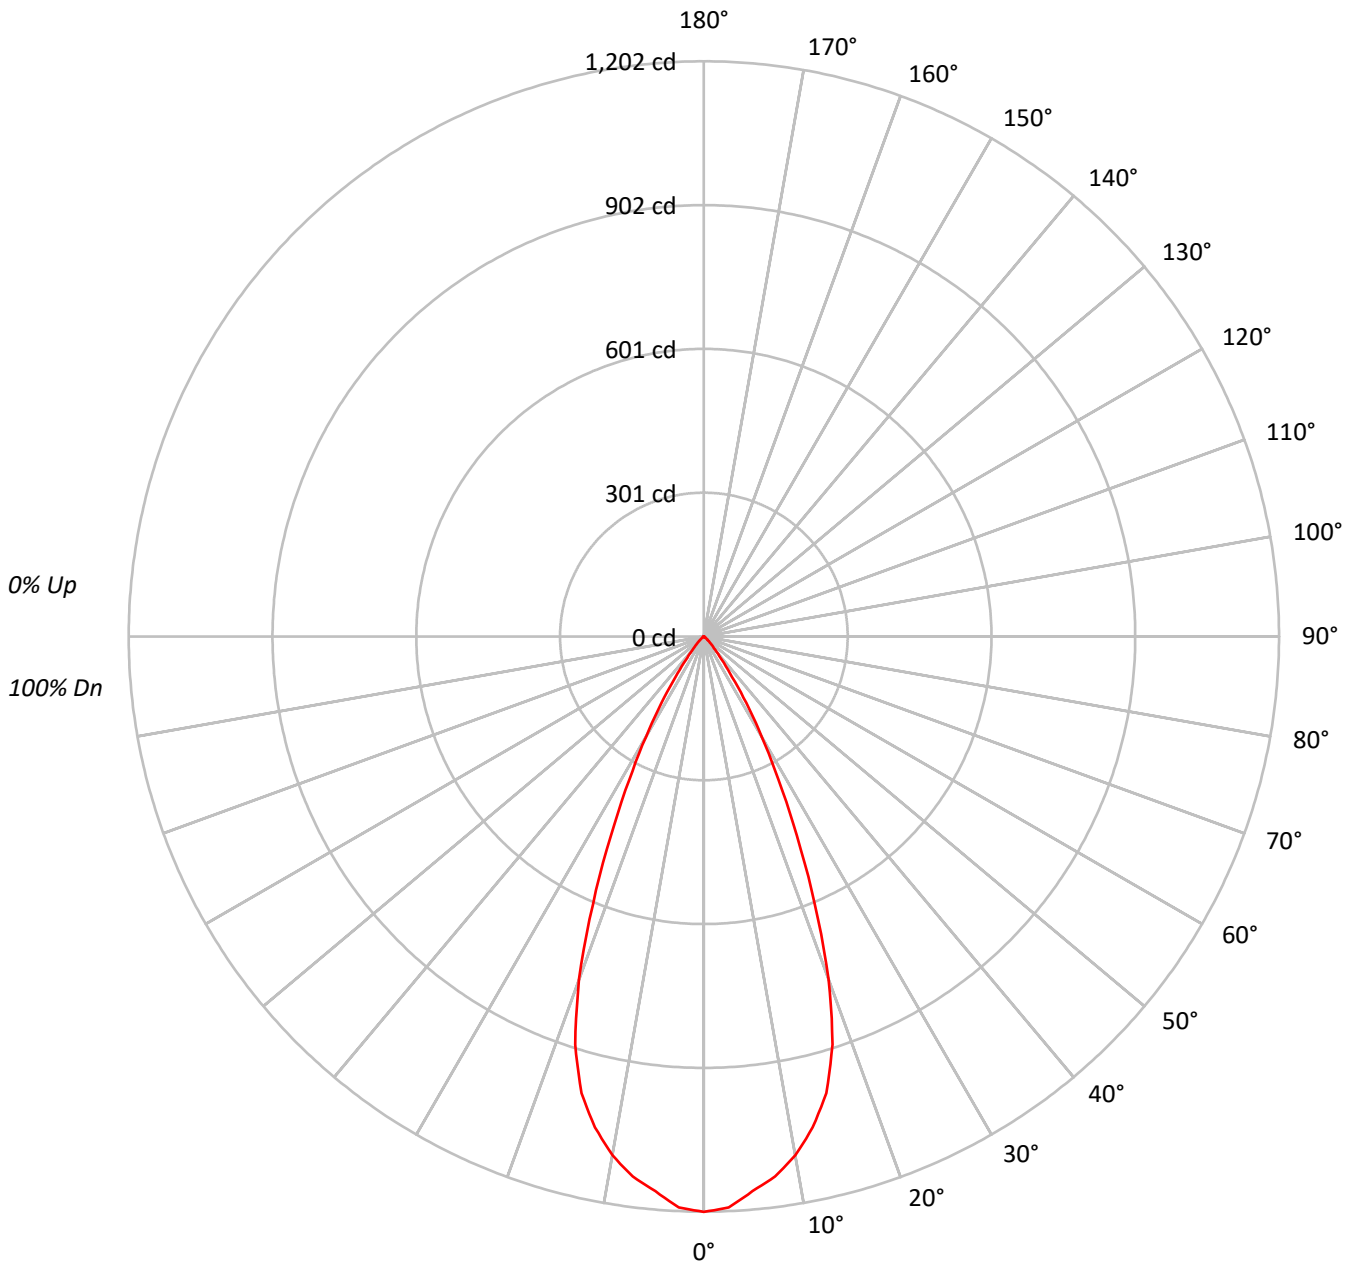



TEST NUMBER: P787233

CATALOG NUMBER: LER6D02D010-EC6DR450210IC9030-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95					95			
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90					90			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85					85			
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81					81			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77					77			
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73					73			
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69					69			
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66					66			
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63					63			
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60					60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	131386
5°	127643
10°	122119
15°	111769
20°	88670
25°	55359
30°	30506
35°	13698
40°	5391
45°	2550
50°	1207
55°	629
60°	306
65°	78
70°	32
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2550 cd/sqm



TEST NUMBER: P787233

CATALOG NUMBER: LER6D02D010-EC6DR450210IC9030-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.3	16.1
10°-20°	269.1	39.6
20°-30°	213.1	31.3
30°-40°	71.0	10.4
40°-50°	14.1	2.1
50°-60°	3.2	0.5
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	591.6	87.0
0°-40°	662.6	97.4
0°-60°	679.9	99.9
0°-90°	680.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	680.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1202	
5°	1164	109
15°	988	269
25°	459	213
35°	103	71
45°	16	14
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P787233

CATALOG NUMBER: LER6D02D010-EC6DR450210IC9030-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1202.5
2.5°	1194.6
5°	1163.8
7.5°	1138.3
10°	1100.7
12.5°	1050.6
15°	988.1
17.5°	894.1
20°	762.6
22.5°	606.0
25°	459.2
27.5°	336.2
30°	241.8
32.5°	164.5
35°	102.7
37.5°	60.9
40°	37.8
42.5°	24.9
45°	16.5
47.5°	10.6
50°	7.1
52.5°	4.7
55°	3.3
57.5°	2.2
60°	1.4
62.5°	0.8
65°	0.3
67.5°	0.1
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)