

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787385

Luminaire Tested: LER6D02D010-EC6DR600210IC9035-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P787385
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D02D010-EC6DR600210IC9035-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 703.2 lumens
Efficiency: N/A
Efficacy: 137.9 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P787385

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9035-6LBDP1LI

Luminous Intensity Polar Plot

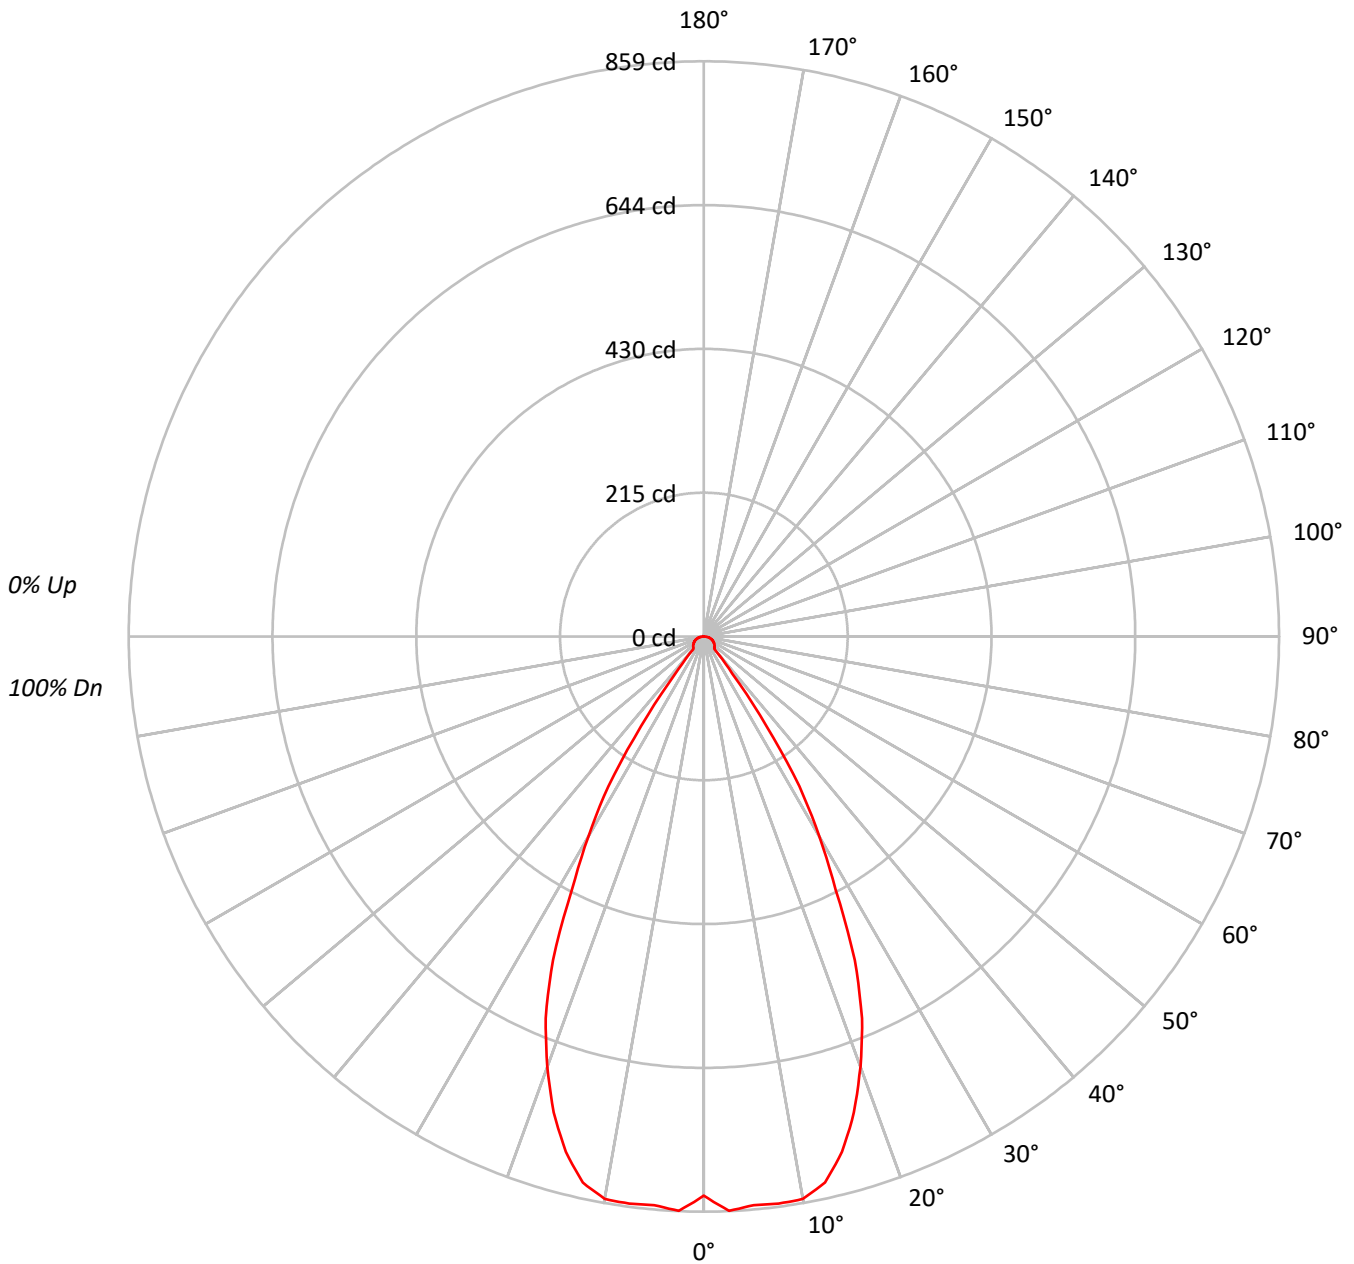



TEST NUMBER: P787385

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9035-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	91244
5°	93490
10°	94626
15°	90141
20°	79473
25°	64280
30°	43476
35°	21795
40°	3537
45°	3461
50°	3536
55°	3581
60°	3671
65°	3775
70°	3865
75°	3884
80°	3775
85°	3134

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 72.5°
 Luminance: 3888 cd/sqm



TEST NUMBER: P787385

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9035-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.5	11.6
10°-20°	220.4	31.3
20°-30°	237.1	33.7
30°-40°	103.1	14.7
40°-50°	17.3	2.5
50°-60°	16.8	2.4
60°-70°	14.4	2.1
70°-80°	9.6	1.4
80°-90°	2.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	539.0	76.7
0°-40°	642.1	91.3
0°-60°	676.3	96.2
0°-90°	703.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	703.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	835	
5°	852	81
15°	797	220
25°	533	237
35°	163	103
45°	22	17
55°	19	17
65°	15	14
75°	9	10
85°	2	3
90°	0	



TEST NUMBER: P787385

CATALOG NUMBER: LER6D02D010-EC6DR600210IC9035-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	835.1
2.5°	858.6
5°	852.4
7.5°	854.4
10°	852.9
12.5°	835.3
15°	796.9
17.5°	745.4
20°	683.5
22.5°	617.3
25°	533.2
27.5°	426.5
30°	344.6
32.5°	265.6
35°	163.4
37.5°	69.9
40°	24.8
42.5°	22.8
45°	22.4
47.5°	21.6
50°	20.8
52.5°	19.8
55°	18.8
57.5°	17.8
60°	16.8
62.5°	15.8
65°	14.6
67.5°	13.4
70°	12.1
72.5°	10.7
75°	9.2
77.5°	7.6
80°	6.0
82.5°	4.2
85°	2.5
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)