

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787427

Luminaire Tested: LER6D02D010-EC6DR650210IC9030-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P787427
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D02D010-EC6DR650210IC9030-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 541.7 lumens
Efficiency: N/A
Efficacy: 106.2 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P787427

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9030-6LBS1B

Luminous Intensity Polar Plot

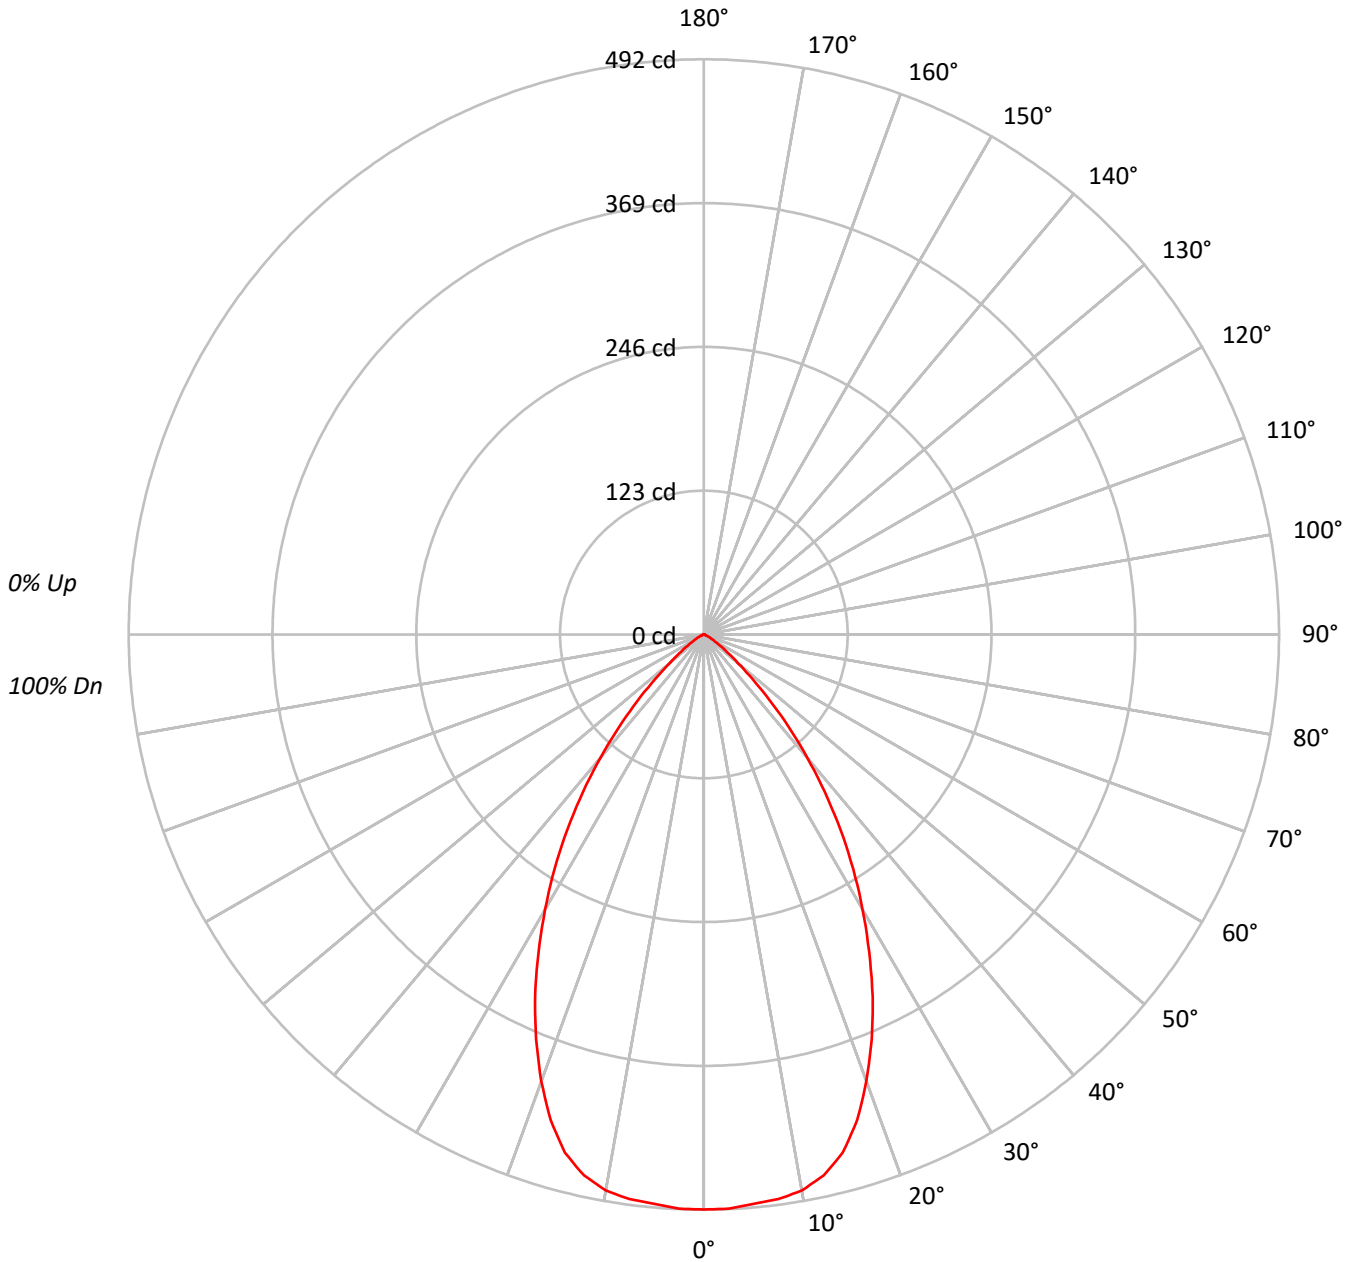



TEST NUMBER: P787427

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9030-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28729
5°	28657
10°	28632
15°	27747
20°	25265
25°	22013
30°	18310
35°	14509
40°	10468
45°	6616
50°	3444
55°	1833
60°	958
65°	525
70°	222
75°	248
80°	168
85°	134

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6616 cd/sqm



TEST NUMBER: P787427

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9030-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.5	8.6
10°-20°	127.4	23.5
20°-30°	155.7	28.7
30°-40°	126.3	23.3
40°-50°	62.9	11.6
50°-60°	17.5	3.2
60°-70°	4.0	0.7
70°-80°	1.0	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	329.6	60.8
0°-40°	456.0	84.2
0°-60°	536.4	99.0
0°-90°	541.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	541.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	492	
5°	489	47
15°	459	127
25°	342	156
35°	204	126
45°	80	63
55°	18	18
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P787427

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9030-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	491.9
2.5°	491.5
5°	488.8
7.5°	487.2
10°	482.8
12.5°	473.8
15°	458.9
17.5°	435.7
20°	406.5
22.5°	374.9
25°	341.6
27.5°	306.0
30°	271.5
32.5°	237.5
35°	203.5
37.5°	169.6
40°	137.3
42.5°	107.1
45°	80.1
47.5°	55.8
50°	37.9
52.5°	26.2
55°	18.0
57.5°	12.1
60°	8.2
62.5°	5.7
65°	3.8
67.5°	2.0
70°	1.3
72.5°	1.2
75°	1.1
77.5°	0.7
80°	0.5
82.5°	0.4
85°	0.2
87.5°	0.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)