

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787434

Luminaire Tested: LER6D02D010-EC6DR650210IC9035-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P787434
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D02D010-EC6DR650210IC9035-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 504.9 lumens
Efficiency: N/A
Efficacy: 99.0 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P787434

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9035-6LBDP1MW

Luminous Intensity Polar Plot

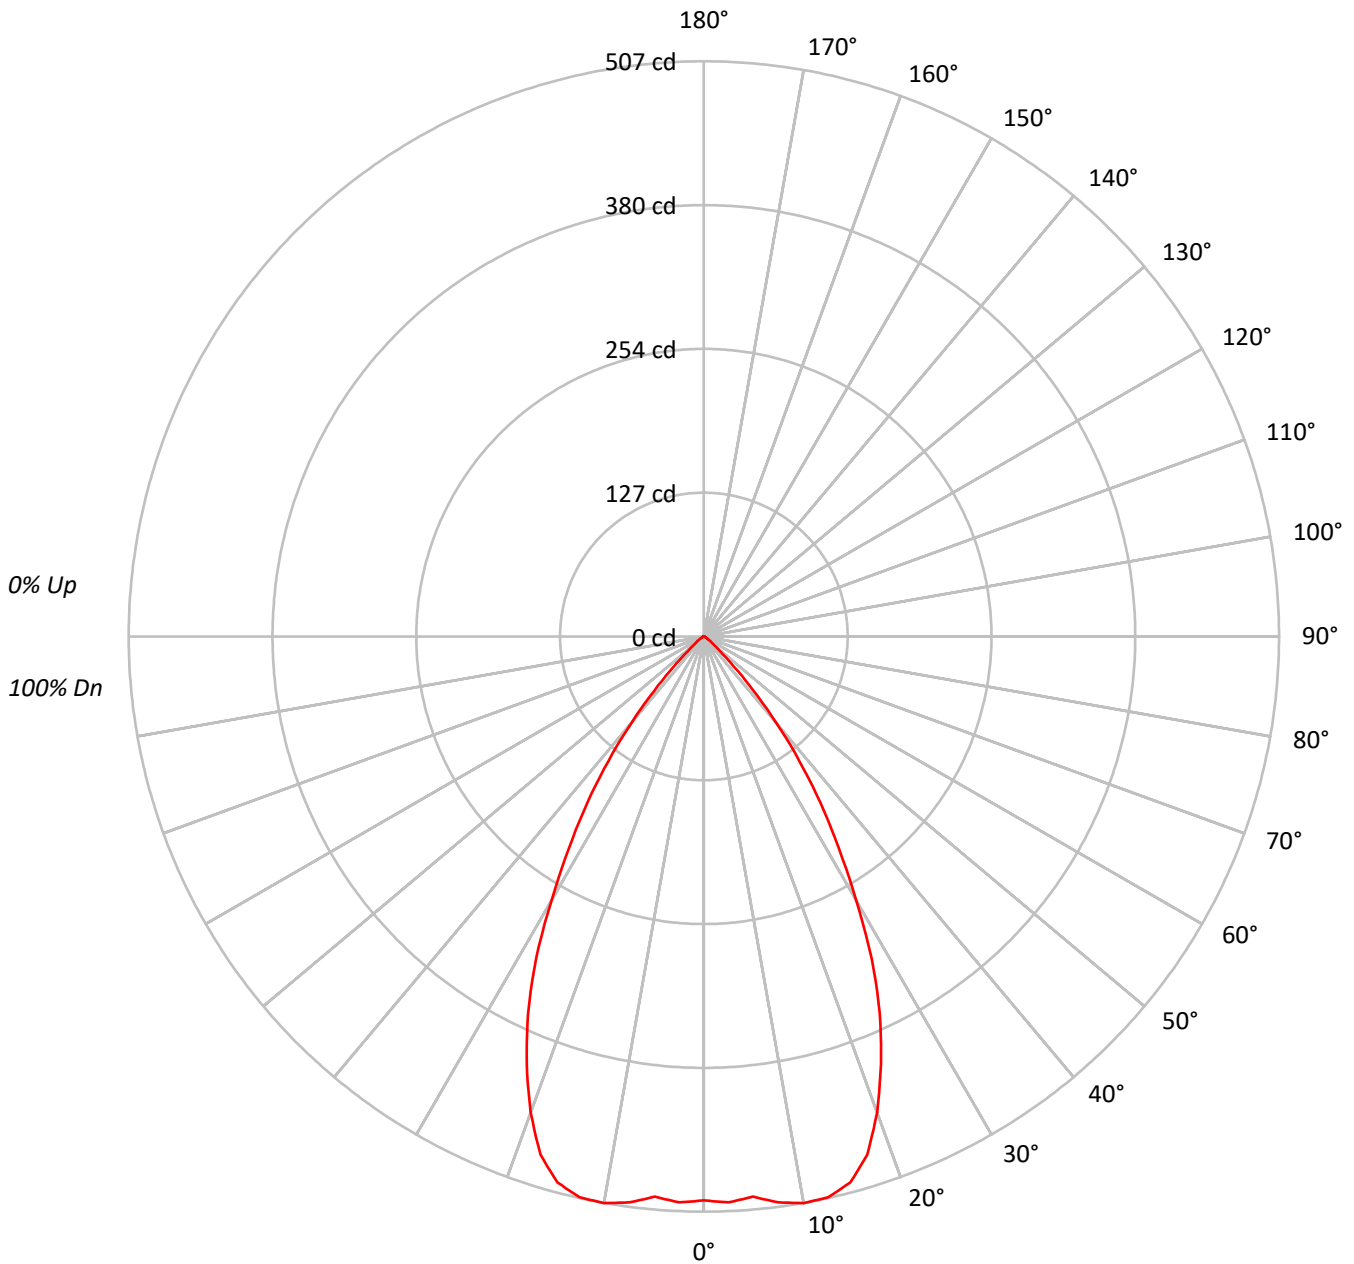



TEST NUMBER: P787434

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9035-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54314
5°	54356
10°	56272
15°	56365
20°	51893
25°	44220
30°	33850
35°	23916
40°	14120
45°	5733
50°	2074
55°	1162
60°	656
65°	362
70°	383
75°	296
80°	315
85°	251

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5733 cd/sqm



TEST NUMBER: P787434

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9035-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.9	9.5
10°-20°	138.1	27.3
20°-30°	165.7	32.8
30°-40°	111.3	22.1
40°-50°	33.3	6.6
50°-60°	5.9	1.2
60°-70°	1.7	0.3
70°-80°	0.8	0.2
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	351.6	69.6
0°-40°	462.9	91.7
0°-60°	502.2	99.5
0°-90°	504.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	504.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	497	
5°	496	48
15°	498	138
25°	367	166
35°	179	111
45°	37	33
55°	6	6
65°	1	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P787434

CATALOG NUMBER: LER6D02D010-EC6DR650210IC9035-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	497.1
2.5°	499.2
5°	495.6
7.5°	503.1
10°	507.2
12.5°	506.2
15°	498.3
17.5°	478.9
20°	446.3
22.5°	407.9
25°	366.8
27.5°	320.4
30°	268.3
32.5°	221.1
35°	179.3
37.5°	138.0
40°	99.0
42.5°	64.6
45°	37.1
47.5°	19.6
50°	12.2
52.5°	8.5
55°	6.1
57.5°	4.4
60°	3.0
62.5°	2.0
65°	1.4
67.5°	1.3
70°	1.2
72.5°	0.9
75°	0.7
77.5°	0.6
80°	0.5
82.5°	0.4
85°	0.2
87.5°	0.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)