

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787638

Luminaire Tested: LER6D05D010-EC6DR200210IC9040-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P787638
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D05D010-EC6DR200210IC9040-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 759.7 lumens
Efficiency: N/A
Efficacy: 101.3 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P787638
CATALOG NUMBER: LER6D05D010-EC6DR200210IC9040-6LBS1MW

Luminous Intensity Polar Plot

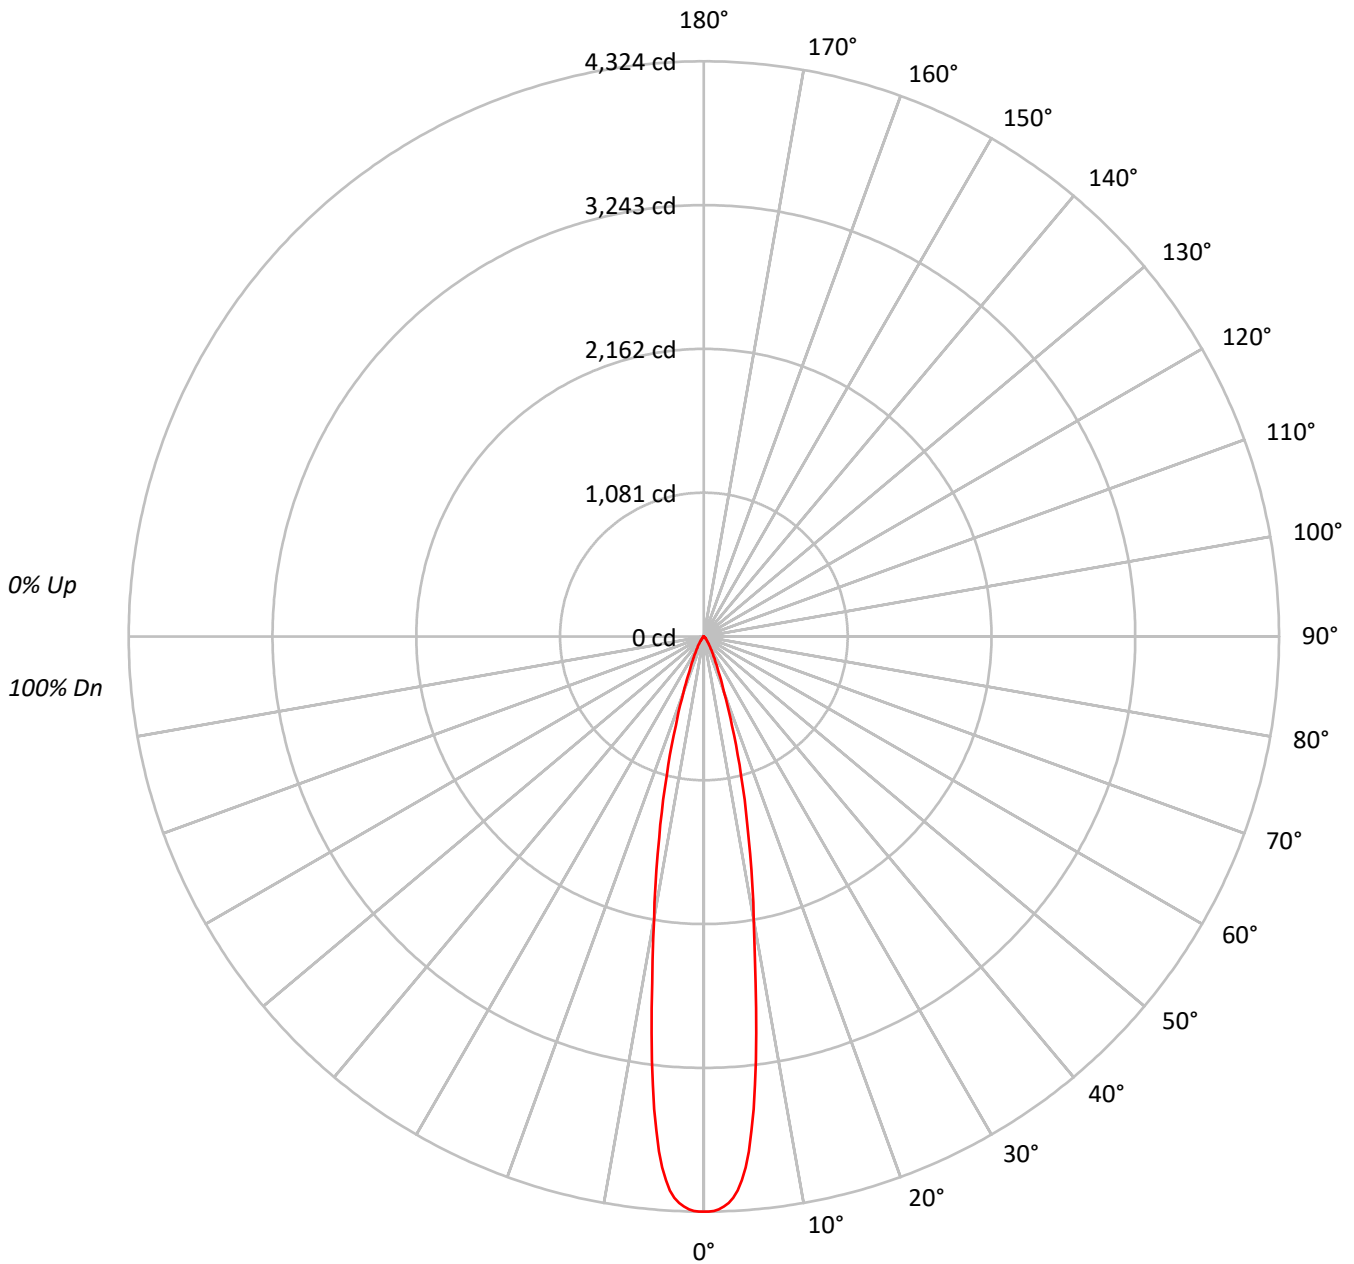



TEST NUMBER: P787638

CATALOG NUMBER: LER6D05D010-EC6DR200210IC9040-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	96	95															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	472433
5°	426220
10°	239222
15°	121599
20°	51486
25°	23762
30°	12578
35°	6776
40°	3623
45°	2148
50°	1241
55°	667
60°	415
65°	310
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2148 cd/sqm



TEST NUMBER: P787638

CATALOG NUMBER: LER6D05D010-EC6DR200210IC9040-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	307.9	40.5
10°-20°	303.1	39.9
20°-30°	99.0	13.0
30°-40°	33.7	4.4
40°-50°	11.3	1.5
50°-60°	3.4	0.4
60°-70°	1.1	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	710.0	93.5
0°-40°	743.7	97.9
0°-60°	758.5	99.8
0°-90°	759.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	759.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4324	
5°	3886	308
15°	1075	303
25°	197	99
35°	51	34
45°	14	11
55°	4	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P787638

CATALOG NUMBER: LER6D05D010-EC6DR200210IC9040-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	4323.9
0.5°	4323.9
1°	4318.5
1.5°	4307.7
2°	4288.1
2.5°	4261.9
3°	4225.0
3.5°	4173.4
4°	4096.7
4.5°	4003.6
5°	3886.1
5.5°	3731.7
6°	3573.5
6.5°	3392.1
7°	3214.6
7.5°	3006.7
8°	2821.1
8.5°	2634.4
9°	2461.9
9.5°	2303.7
10°	2156.2
12.5°	1548.2
15°	1075.0
17.5°	702.3
20°	442.8
22.5°	286.8
25°	197.1
27.5°	138.6
30°	99.7
32.5°	71.6
35°	50.8
37.5°	35.4
40°	25.4
42.5°	18.5
45°	13.9
47.5°	10.8
50°	7.3
52.5°	4.6
55°	3.5
57.5°	2.7
60°	1.9
62.5°	1.5
65°	1.2



TEST NUMBER: P787638

CATALOG NUMBER: LER6D05D010-EC6DR200210IC9040-6LBS1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.8
70°		0.4

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)