

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787710

Luminaire Tested: LER6D05D010-EC6DR300210IC9027-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P787710
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D05D010-EC6DR300210IC9027-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1091.4 lumens
Efficiency: N/A
Efficacy: 145.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P787710

CATALOG NUMBER: LER6D05D010-EC6DR300210IC9027-6LBS1MW

Luminous Intensity Polar Plot

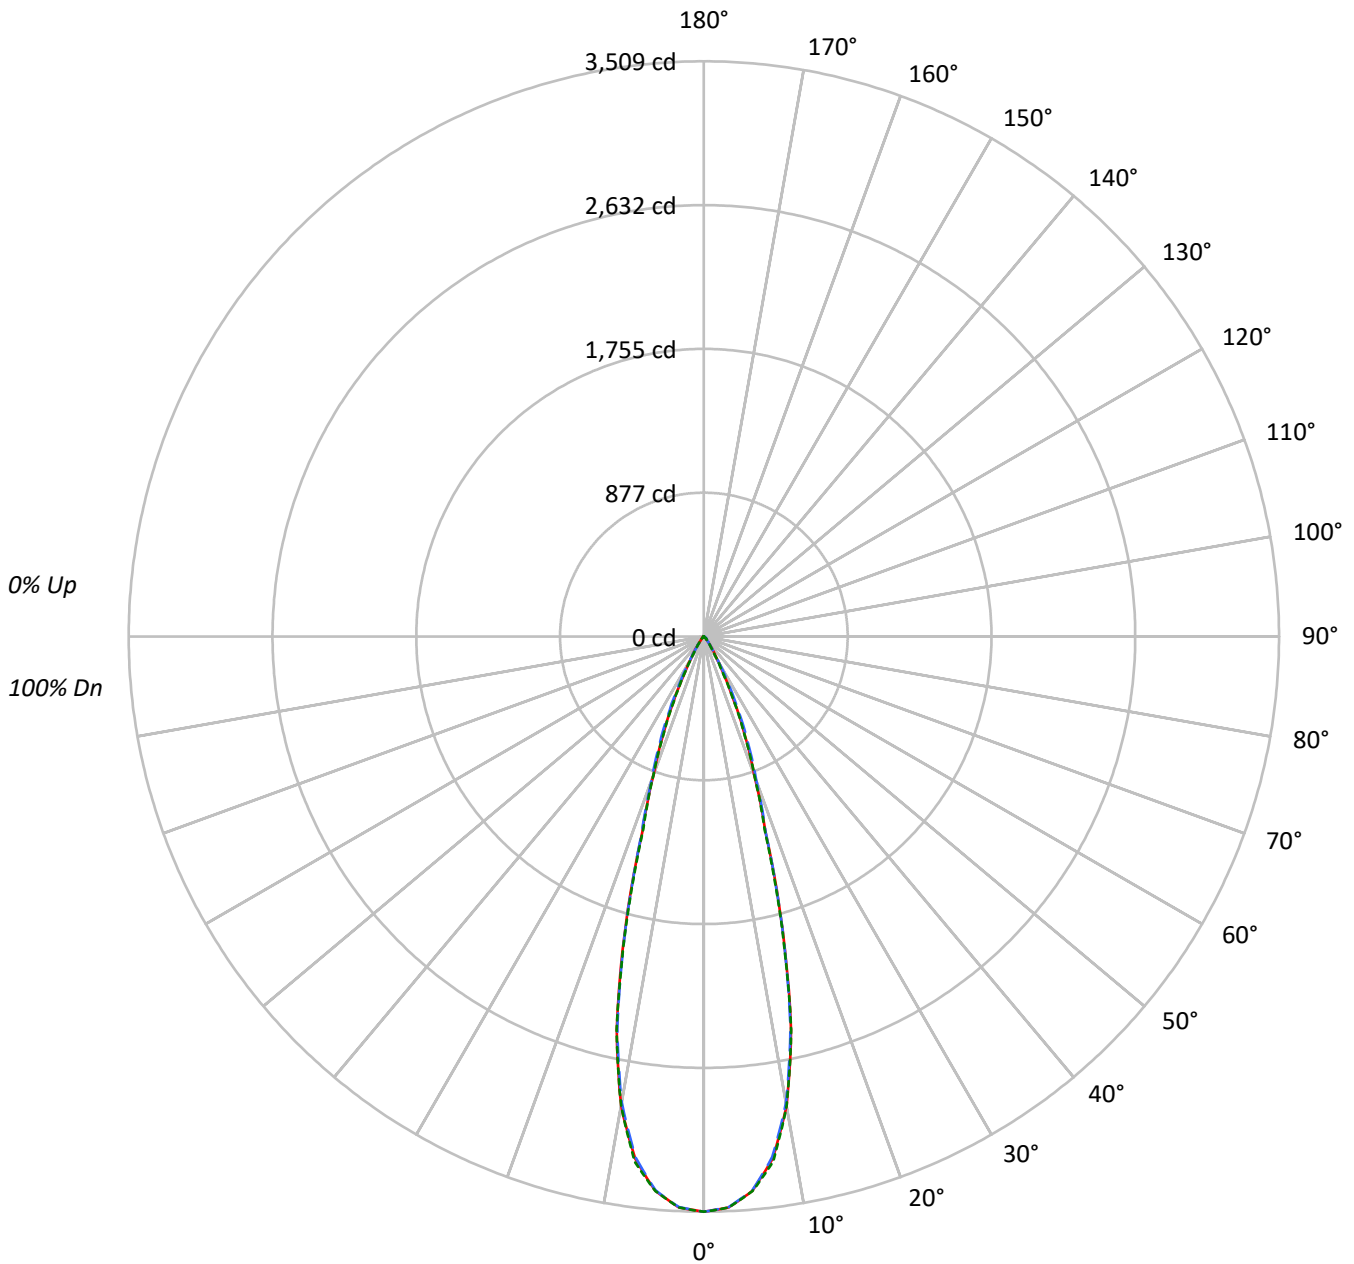



TEST NUMBER: P787710

CATALOG NUMBER: LER6D05D010-EC6DR300210IC9027-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	268621	268621	268621
5°	260911	260604	260927
10°	225991	224398	225936
15°	147448	146656	145919
20°	73318	76072	73221
25°	36933	41645	36173
30°	14787	16113	12886
35°	6859	6569	5504
40°	2958	3287	2788
45°	2089	2587	2111
50°	714	1893	762
55°	414	787	440
60°	291	337	291
65°	181	181	181
70°	112	67	112
75°	0	59	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 2587 cd/sqm



TEST NUMBER: P787710

CATALOG NUMBER: LER6D05D010-EC6DR300210IC9027-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	308.6	28.3
10°-20°	497.0	45.5
20°-30°	214.8	19.7
30°-40°	49.0	4.5
40°-50°	16.8	1.5
50°-60°	4.1	0.4
60°-70°	1.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1020.4	93.5
0°-40°	1069.3	98.0
0°-60°	1090.2	99.9
0°-90°	1091.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1091.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3509	3509	3509	3509	3509	
5°	3396	3392	3392	3399	3396	309
15°	1861	1838	1851	1845	1841	498
25°	437	454	493	442	428	209
35°	73	75	70	70	59	50
45°	19	24	24	24	20	14
55°	3	3	6	3	3	3
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P787710

CATALOG NUMBER: LER6D05D010-EC6DR300210IC9027-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3509.4	3509.4	3509.4	3509.4	3509.4
2.5°	3486.2	3483.7	3485.1	3486.8	3487.5
5°	3395.7	3392.4	3391.7	3398.8	3395.9
7.5°	3213.2	3208.6	3201.5	3217.5	3232.5
10°	2907.6	2902.4	2887.1	2894.7	2906.9
12.5°	2456.3	2439.6	2439.3	2463.4	2460.1
15°	1860.7	1838.3	1850.7	1844.7	1841.4
17.5°	1251.2	1242.6	1259.2	1254.2	1232.6
20°	900.1	902.3	933.9	918.0	898.9
22.5°	656.8	664.9	702.3	661.5	646.5
25°	437.3	453.8	493.1	442.3	428.3
27.5°	269.0	276.5	316.3	265.5	257.9
30°	167.3	163.5	182.3	156.4	145.8
32.5°	109.8	104.9	111.0	99.6	91.0
35°	73.4	75.0	70.3	69.8	58.9
37.5°	45.8	52.7	46.5	49.6	37.9
40°	29.6	38.3	32.9	36.4	27.9
42.5°	24.3	29.5	27.1	28.8	24.8
45°	19.3	23.9	23.9	23.9	19.5
47.5°	10.7	16.0	20.5	16.4	11.4
50°	6.0	8.1	15.9	8.4	6.4
52.5°	4.1	4.7	10.9	4.8	4.3
55°	3.1	3.3	5.9	3.4	3.3
57.5°	2.4	2.6	3.1	2.6	2.4
60°	1.9	1.9	2.2	2.1	1.9
62.5°	1.4	1.4	1.6	1.4	1.4
65°	1.0	1.0	1.0	1.0	1.0
67.5°	0.5	0.7	0.7	0.7	0.7
70°	0.5	0.3	0.3	0.3	0.5
72.5°	0.3	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)