

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P787866

Luminaire Tested: LER6D05D010-EC6DR450210IC9035-6LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P787866  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D05D010-EC6DR450210IC9035-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1180.1 lumens  
Efficiency: N/A  
Efficacy: 157.4 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P787866

CATALOG NUMBER: LER6D05D010-EC6DR450210IC9035-6LBDP1MW

### Luminous Intensity Polar Plot

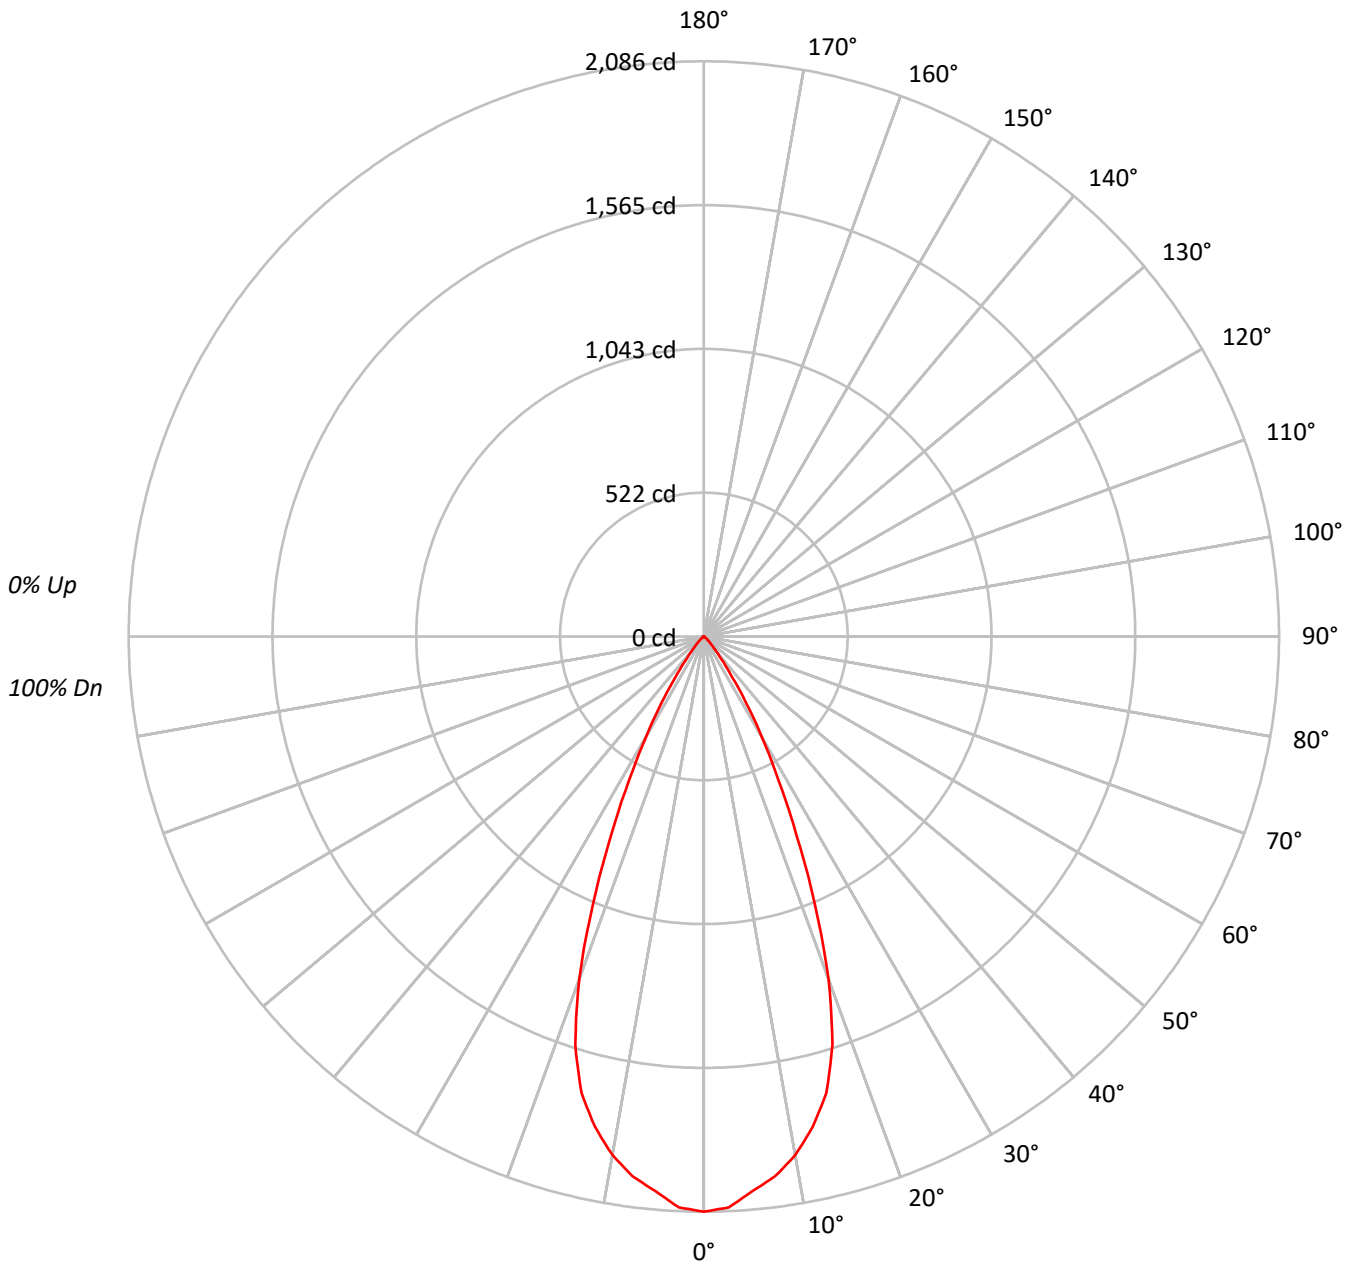



TEST NUMBER: P787866

CATALOG NUMBER: LER6D05D010-EC6DR450210IC9035-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95																			
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90																			
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85																			
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81																			
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77																			
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73																			
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69																			
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66																			
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63																			
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	227907
5°	221418
10°	211841
15°	193879
20°	153806
25°	96023
30°	52926
35°	23769
40°	9357
45°	4404
50°	2091
55°	1086
60°	546
65°	129
70°	64
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4404 cd/sqm



TEST NUMBER: P787866

CATALOG NUMBER: LER6D05D010-EC6DR450210IC9035-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	189.7	16.1
10°-20°	466.8	39.6
20°-30°	369.7	31.3
30°-40°	123.1	10.4
40°-50°	24.4	2.1
50°-60°	5.5	0.5
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1026.2	87.0
0°-40°	1149.3	97.4
0°-60°	1179.3	99.9
0°-90°	1180.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1180.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2086	
5°	2019	190
15°	1714	467
25°	796	370
35°	178	123
45°	28	24
55°	6	6
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P787866

CATALOG NUMBER: LER6D05D010-EC6DR450210IC9035-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2085.9
2.5°	2072.3
5°	2018.8
7.5°	1974.7
10°	1909.4
12.5°	1822.4
15°	1714.0
17.5°	1550.9
20°	1322.8
22.5°	1051.1
25°	796.5
27.5°	583.2
30°	419.5
32.5°	285.3
35°	178.2
37.5°	105.7
40°	65.6
42.5°	43.1
45°	28.5
47.5°	18.4
50°	12.3
52.5°	8.2
55°	5.7
57.5°	3.8
60°	2.5
62.5°	1.3
65°	0.5
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)