

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788000

Luminaire Tested: LER6D05D010-EC6DR600210IC9030-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P788000
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D05D010-EC6DR600210IC9030-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1156.6 lumens
Efficiency: N/A
Efficacy: 154.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.84
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P788000
CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBDP1H

Luminous Intensity Polar Plot

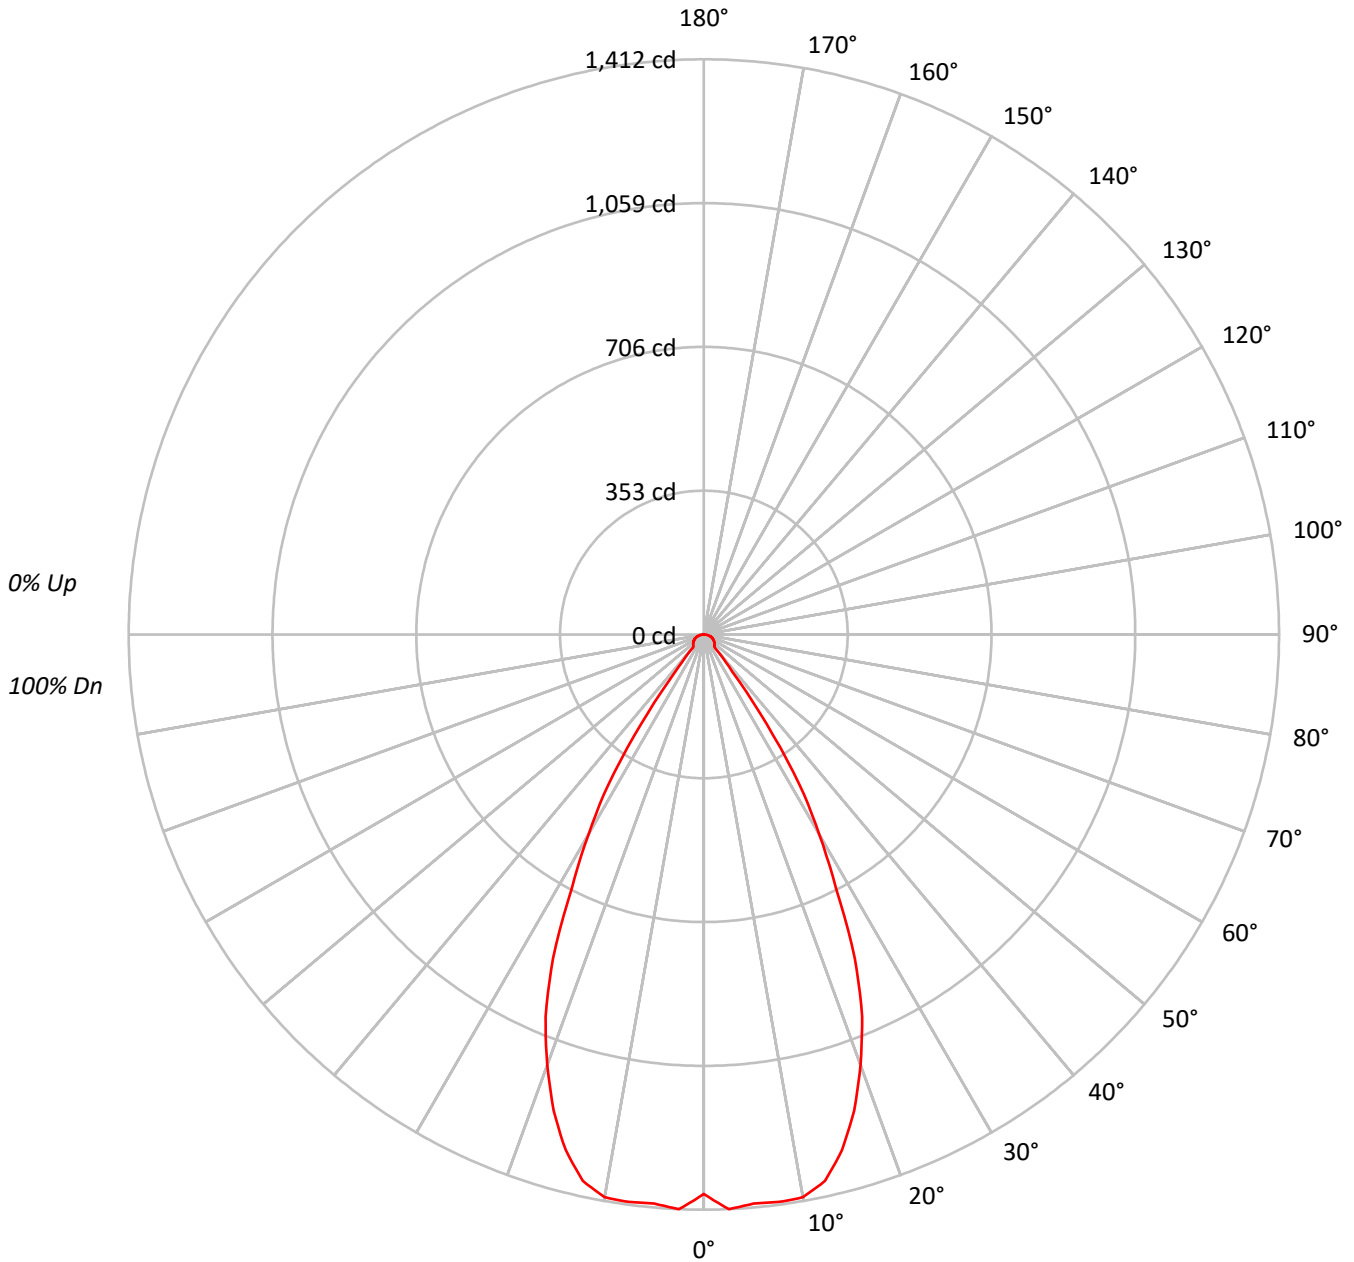



TEST NUMBER: P788000

CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	150081
5°	153780
10°	155635
15°	148260
20°	130726
25°	105728
30°	71522
35°	35840
40°	5819
45°	5686
50°	5796
55°	5886
60°	6053
65°	6205
70°	6325
75°	6417
80°	6166
85°	5140

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 6417 cd/sqm



TEST NUMBER: P788000

CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	134.0	11.6
10°-20°	362.6	31.3
20°-30°	390.1	33.7
30°-40°	169.6	14.7
40°-50°	28.5	2.5
50°-60°	27.7	2.4
60°-70°	23.7	2.0
70°-80°	15.8	1.4
80°-90°	4.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	886.6	76.7
0°-40°	1056.2	91.3
0°-60°	1112.3	96.2
0°-90°	1156.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1156.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1374	
5°	1402	134
15°	1311	363
25°	877	390
35°	269	170
45°	37	28
55°	31	28
65°	24	24
75°	15	16
85°	4	5
90°	0	



TEST NUMBER: P788000

CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1373.6
2.5°	1412.3
5°	1402.1
7.5°	1405.3
10°	1402.8
12.5°	1373.8
15°	1310.7
17.5°	1226.0
20°	1124.3
22.5°	1015.4
25°	877.0
27.5°	701.5
30°	566.9
32.5°	436.9
35°	268.7
37.5°	114.9
40°	40.8
42.5°	37.5
45°	36.8
47.5°	35.6
50°	34.1
52.5°	32.5
55°	30.9
57.5°	29.3
60°	27.7
62.5°	25.9
65°	24.0
67.5°	22.0
70°	19.8
72.5°	17.5
75°	15.2
77.5°	12.5
80°	9.8
82.5°	7.0
85°	4.1
87.5°	1.4
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)