

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788005

Luminaire Tested: LER6D05D010-EC6DR600210IC9030-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P788005
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D05D010-EC6DR600210IC9030-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1278.4 lumens
Efficiency: N/A
Efficacy: 170.5 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P788005

CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBS1LI

Luminous Intensity Polar Plot

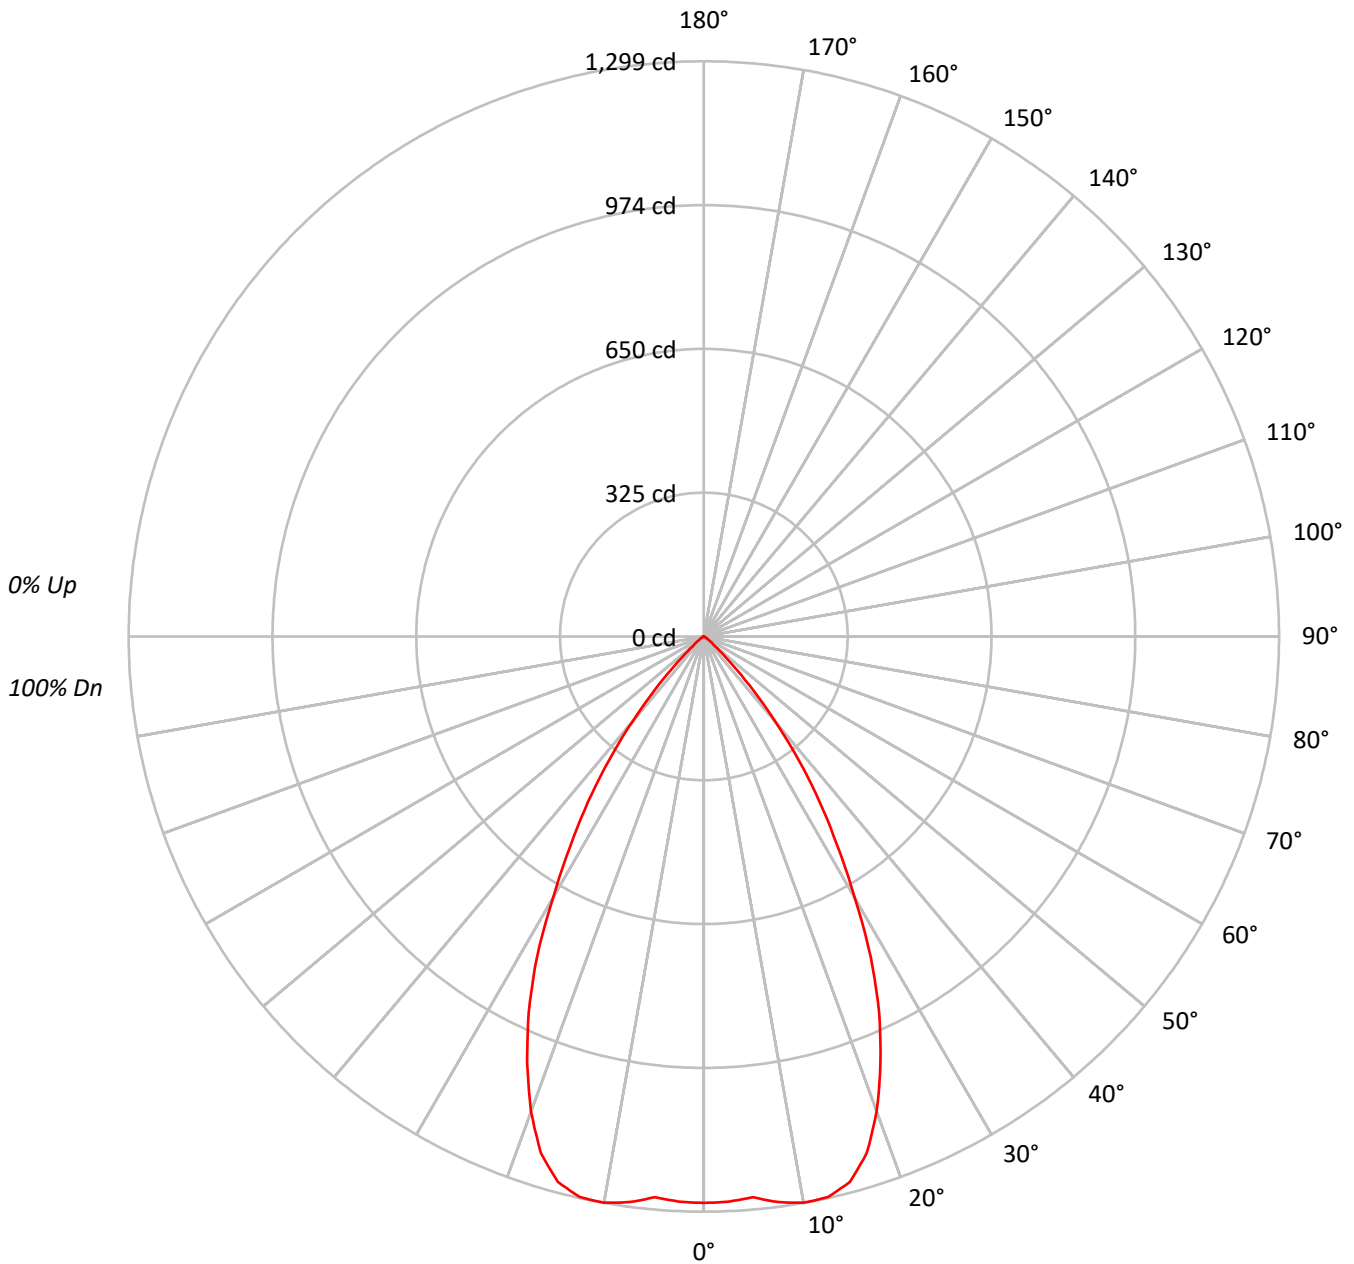



TEST NUMBER: P788005

CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	92		95	93	90		92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87	85	82	81
4	97	90	84	80	95	88	83	79	86	82	78		84	81	78		82	79	77	75
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78	74	71	70
6	87	79	73	68	86	78	72	68	76	71	68		75	70	67		74	70	67	65
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69	65	62	61
8	79	69	63	59	78	69	63	59	68	63	59		67	62	59		66	61	58	57
9	75	65	59	55	74	65	59	55	64	59	55		63	58	55		62	58	55	53
10	72	62	56	52	71	61	56	52	61	55	52		60	55	52		59	55	52	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	139777
5°	139434
10°	144075
15°	144222
20°	132691
25°	112864
30°	86006
35°	60823
40°	35714
45°	14417
50°	4810
55°	2324
60°	961
65°	129
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14417 cd/sqm



TEST NUMBER: P788005

CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.6	9.6
10°-20°	353.2	27.6
20°-30°	422.8	33.1
30°-40°	282.8	22.1
40°-50°	83.8	6.6
50°-60°	12.1	0.9
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	898.6	70.3
0°-40°	1181.4	92.4
0°-60°	1277.3	99.9
0°-90°	1278.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1278.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1279	
5°	1271	123
15°	1275	353
25°	936	423
35°	456	283
45°	93	84
55°	12	12
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P788005

CATALOG NUMBER: LER6D05D010-EC6DR600210IC9030-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1279.3
2.5°	1277.7
5°	1271.3
7.5°	1288.6
10°	1298.6
12.5°	1296.7
15°	1275.0
17.5°	1223.6
20°	1141.2
22.5°	1042.4
25°	936.2
27.5°	816.7
30°	681.7
32.5°	561.2
35°	456.0
37.5°	350.5
40°	250.4
42.5°	165.1
45°	93.3
47.5°	47.7
50°	28.3
52.5°	18.3
55°	12.2
57.5°	7.8
60°	4.4
62.5°	1.8
65°	0.5
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)