

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788177

Luminaire Tested: LER6D08D010-EC6DR150210IC9024-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P788177  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D08D010-EC6DR150210IC9024-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 719.2 lumens  
Efficiency: N/A  
Efficacy: 80.8 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P788177

CATALOG NUMBER: LER6D08D010-EC6DR150210IC9024-6LBDP1LI

### Luminous Intensity Polar Plot

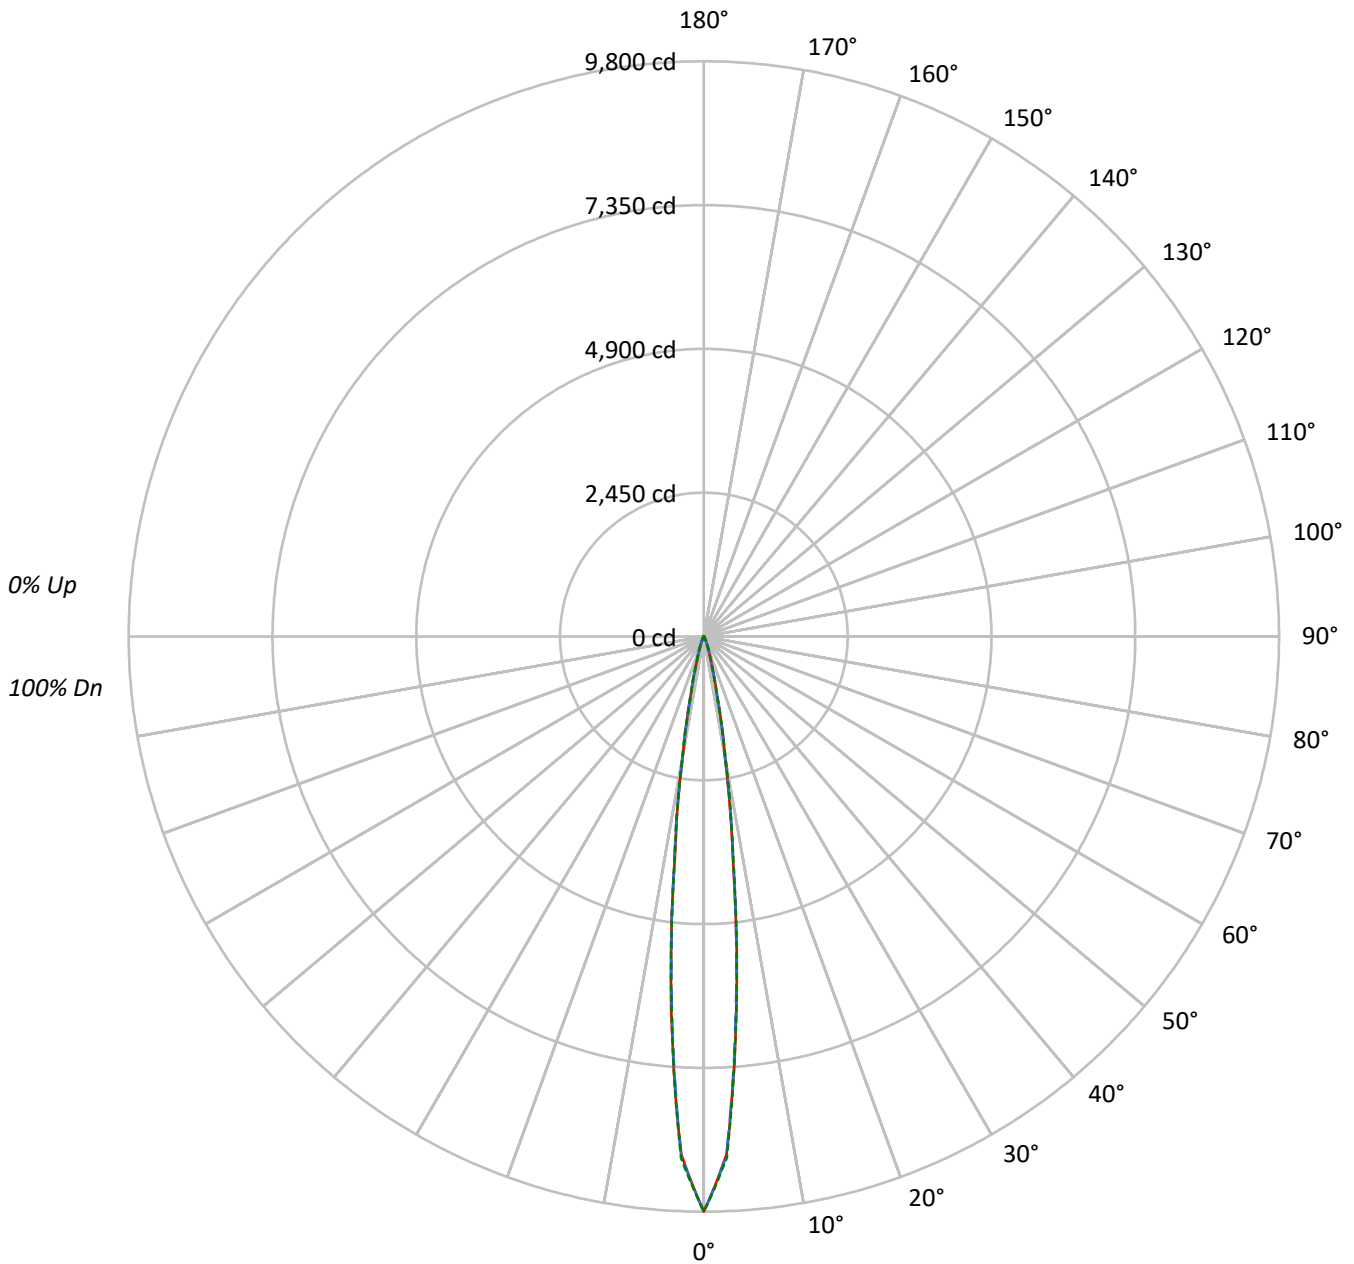



TEST NUMBER: P788177

CATALOG NUMBER: LER6D08D010-EC6DR150210IC9024-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	99	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1102662	1102662	1102662
5°	647976	639591	644652
10°	193389	194742	197728
15°	48101	49039	47528
20°	14393	16667	14695
25°	5071	6466	5141
30°	1865	2456	1894
35°	937	1053	900
40°	589	646	589
45°	434	462	434
50°	348	348	348
55°	285	285	285
60°	232	232	232
65°	178	178	178
70°	154	154	154
75°	91	91	128
80°	63	63	63
85°	33	33	33

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 462 cd/sqm



TEST NUMBER: P788177

CATALOG NUMBER: LER6D08D010-EC6DR150210IC9024-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	466.5	64.9
10°-20°	191.9	26.7
20°-30°	38.1	5.3
30°-40°	9.5	1.3
40°-50°	5.0	0.7
50°-60°	3.7	0.5
60°-70°	2.6	0.4
70°-80°	1.5	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	696.5	96.8
0°-40°	706.0	98.2
0°-60°	714.7	99.4
0°-90°	719.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	719.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	9800	9800	9800	9800	9800	
5°	6376	6310	6293	6337	6343	466
15°	554	564	565	555	547	190
25°	65	74	83	73	66	34
35°	13	14	14	14	12	9
45°	6	6	7	6	6	5
55°	4	4	4	4	4	4
65°	2	2	2	2	2	3
75°	1	1	1	1	2	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P788177

CATALOG NUMBER: LER6D08D010-EC6DR150210IC9024-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	9799.7	9799.7	9799.7	9799.7	9799.7
2.5°	8839.8	8847.2	8850.1	8858.8	8891.2
5°	6375.9	6310.4	6293.4	6336.9	6343.2
7.5°	3776.9	3790.1	3838.7	3849.5	3810.5
10°	2072.6	2089.6	2087.1	2102.1	2119.1
12.5°	1060.0	1046.7	1042.5	1059.5	1035.9
15°	553.8	564.2	564.6	554.7	547.2
17.5°	297.9	309.9	329.8	313.6	288.7
20°	175.9	186.7	203.7	190.4	179.6
22.5°	108.7	117.4	129.4	119.1	110.4
25°	65.1	73.8	83.0	73.4	66.0
27.5°	38.6	46.0	51.9	45.6	38.2
30°	24.9	29.0	32.8	28.6	25.3
32.5°	17.4	19.1	20.7	19.1	17.4
35°	12.9	13.7	14.5	13.7	12.4
37.5°	10.0	10.8	11.2	10.4	9.5
40°	8.3	8.7	9.1	8.7	8.3
42.5°	7.1	7.5	7.5	7.5	7.1
45°	6.2	6.2	6.6	6.2	6.2
47.5°	5.4	5.4	5.8	5.4	5.4
50°	5.0	5.0	5.0	5.0	5.0
52.5°	4.6	4.6	4.6	4.6	4.6
55°	4.1	4.1	4.1	4.1	4.1
57.5°	3.7	3.7	3.7	3.7	3.7
60°	3.3	3.3	3.3	3.3	3.3
62.5°	2.9	2.9	2.9	2.9	2.9
65°	2.5	2.5	2.5	2.5	2.5
67.5°	2.5	2.5	2.5	2.5	2.5
70°	2.1	2.1	2.1	2.1	2.1
72.5°	1.7	1.7	1.7	1.7	1.7
75°	1.2	1.2	1.2	1.2	1.7
77.5°	1.2	1.2	1.2	1.2	1.2
80°	0.8	0.8	0.8	0.8	0.8
82.5°	0.8	0.8	0.8	0.8	0.8
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)