

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788360

Luminaire Tested: LER6D08D010-EC6DR300210IC9050-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P788360
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D08D010-EC6DR300210IC9050-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1420.5 lumens
Efficiency: N/A
Efficacy: 159.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P788360

CATALOG NUMBER: LER6D08D010-EC6DR300210IC9050-6LBDP1H

Luminous Intensity Polar Plot

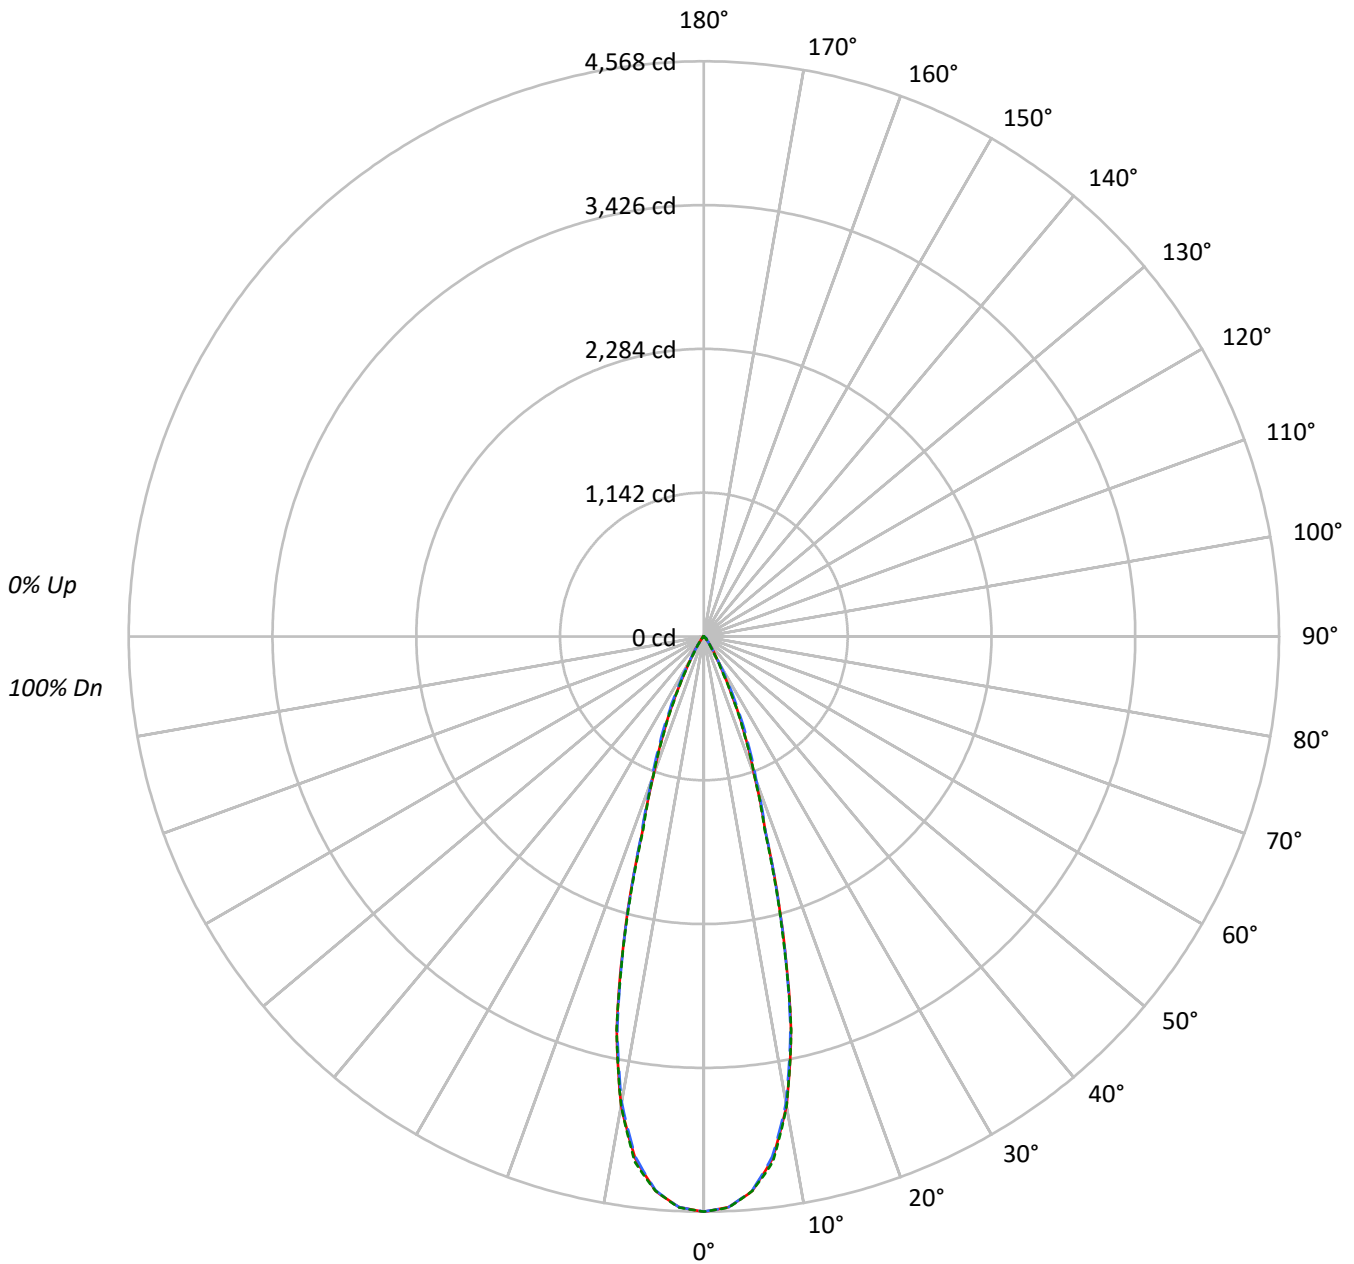



TEST NUMBER: P788360

CATALOG NUMBER: LER6D08D010-EC6DR300210IC9050-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	349635	349635	349635
5°	339591	339199	339614
10°	294139	292064	294070
15°	191912	190882	189923
20°	95425	99010	95303
25°	48073	54204	47084
30°	19250	20974	16767
35°	8924	8550	7167
40°	3857	4277	3627
45°	2717	3377	2739
50°	929	2453	988
55°	534	1014	574
60°	383	444	383
65°	235	235	235
70°	157	90	157
75°	0	59	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 3377 cd/sqm



TEST NUMBER: P788360

CATALOG NUMBER: LER6D08D010-EC6DR300210IC9050-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	401.7	28.3
10°-20°	646.9	45.5
20°-30°	279.5	19.7
30°-40°	63.7	4.5
40°-50°	21.9	1.5
50°-60°	5.3	0.4
60°-70°	1.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1328.1	93.5
0°-40°	1391.8	98.0
0°-60°	1419.0	99.9
0°-90°	1420.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1420.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4568	4568	4568	4568	4568	
5°	4420	4416	4415	4424	4420	402
15°	2422	2393	2409	2401	2397	648
25°	569	591	642	576	558	272
35°	96	98	92	91	77	65
45°	25	31	31	31	25	18
55°	4	4	8	4	4	4
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P788360

CATALOG NUMBER: LER6D08D010-EC6DR300210IC9050-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4567.8	4567.8	4567.8	4567.8	4567.8
2.5°	4537.5	4534.3	4536.1	4538.4	4539.3
5°	4419.7	4415.5	4414.6	4423.8	4420.0
7.5°	4182.3	4176.2	4167.0	4187.9	4207.4
10°	3784.4	3777.7	3757.7	3767.6	3783.5
12.5°	3197.1	3175.3	3174.9	3206.3	3202.0
15°	2421.8	2392.6	2408.8	2400.9	2396.7
17.5°	1628.6	1617.4	1638.9	1632.4	1604.4
20°	1171.5	1174.5	1215.5	1194.9	1170.0
22.5°	854.9	865.4	914.1	860.9	841.4
25°	569.2	590.7	641.8	575.7	557.5
27.5°	350.1	359.9	411.7	345.6	335.7
30°	217.8	212.8	237.3	203.6	189.7
32.5°	142.9	136.6	144.4	129.6	118.4
35°	95.5	97.6	91.5	90.8	76.7
37.5°	59.7	68.6	60.6	64.6	49.3
40°	38.6	49.8	42.8	47.3	36.3
42.5°	31.6	38.3	35.2	37.5	32.3
45°	25.1	31.2	31.2	31.2	25.3
47.5°	13.9	20.9	26.7	21.3	14.8
50°	7.8	10.5	20.6	11.0	8.3
52.5°	5.4	6.1	14.1	6.3	5.6
55°	4.0	4.3	7.6	4.5	4.3
57.5°	3.1	3.4	4.0	3.4	3.1
60°	2.5	2.5	2.9	2.7	2.5
62.5°	1.8	1.8	2.0	1.8	1.8
65°	1.3	1.3	1.3	1.3	1.3
67.5°	0.7	0.9	0.9	0.9	0.9
70°	0.7	0.4	0.4	0.4	0.7
72.5°	0.4	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)