

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788528

Luminaire Tested: LER6D08D010-EC6DR500210IC9030-6LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P788528  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D08D010-EC6DR500210IC9030-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1407.6 lumens  
Efficiency: N/A  
Efficacy: 158.2 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P788528

CATALOG NUMBER: LER6D08D010-EC6DR500210IC9030-6LBDP1H

### Luminous Intensity Polar Plot

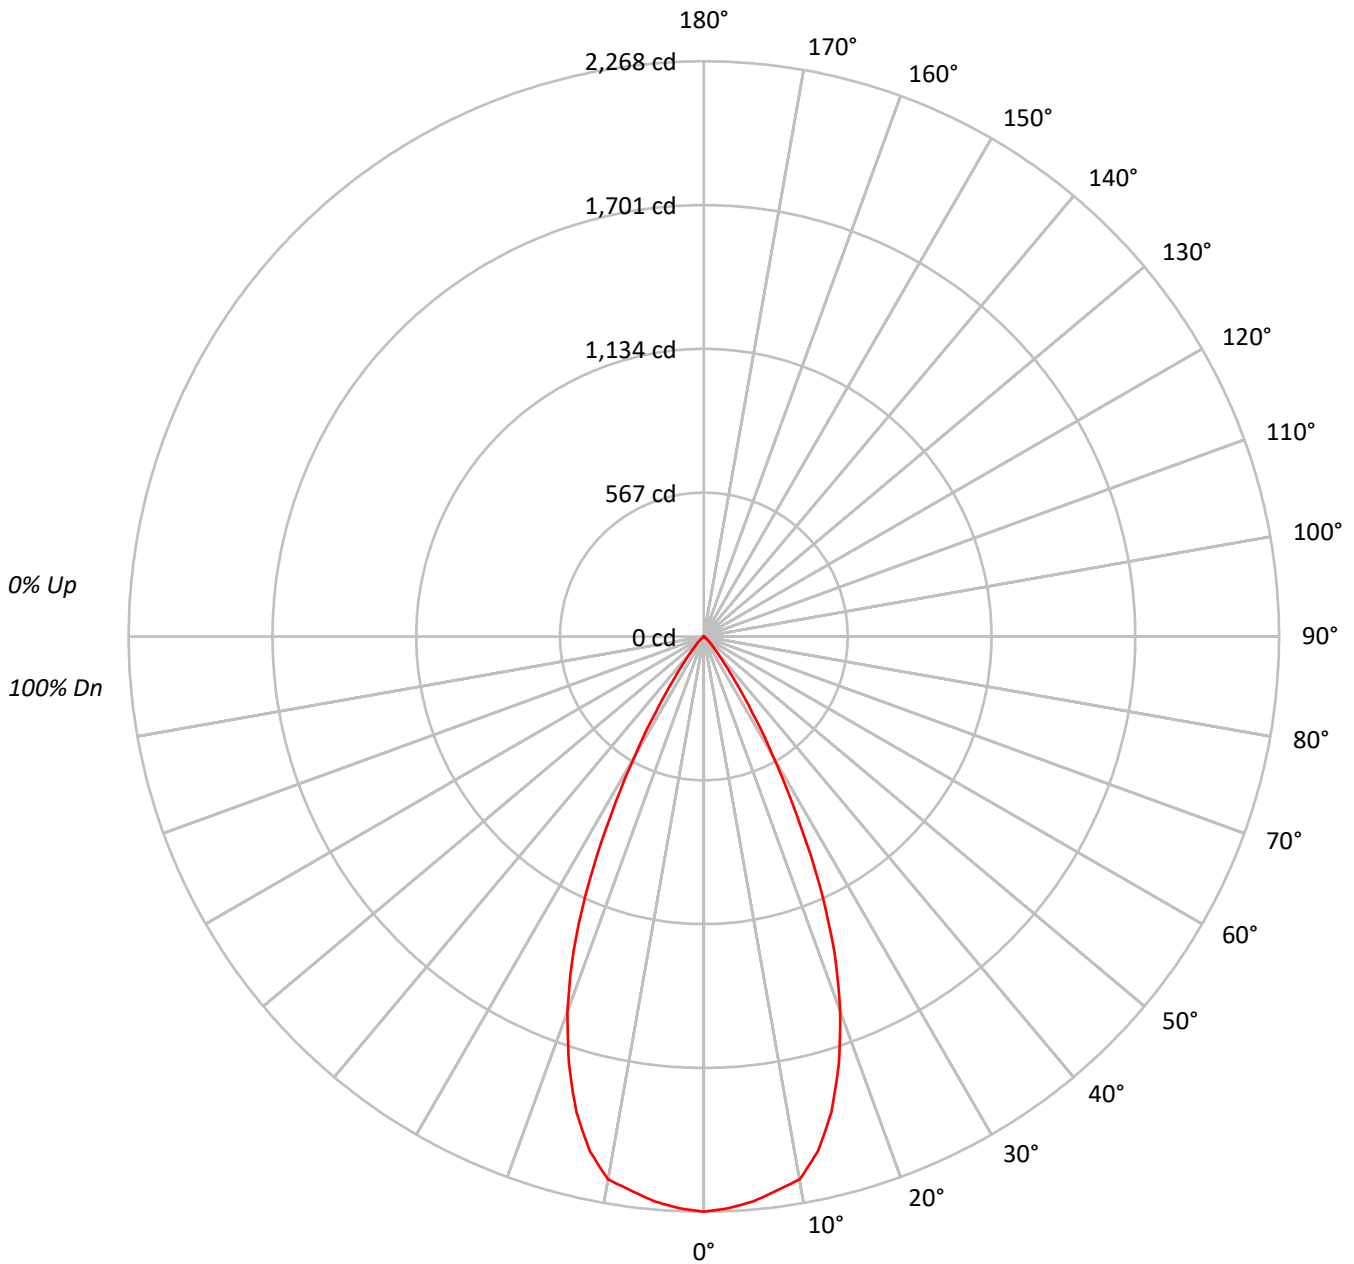



TEST NUMBER: P788528

CATALOG NUMBER: LER6D08D010-EC6DR500210IC9030-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									20								
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100																	
	1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95																
	2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90	90	90	90	90	90	90	90	90	90	90	90	90	90	90	90	90	90	90	90																
	3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85	85																
	4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80															
	5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76															
	6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72	72															
	7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69	69	69	69	69	69	69	69	69	69	69	69	69	69	69	69	69	69															
	8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65	65															
	9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62															
	10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59	59	59	59	59	59	59	59	59	59	59	59	59	59	59	59	59	59	59	59																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	247803
5°	245207
10°	241164
15°	219602
20°	182734
25°	129718
30°	68658
35°	27984
40°	10398
45°	4759
50°	1955
55°	1029
60°	503
65°	155
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4759 cd/sqm



TEST NUMBER: P788528

CATALOG NUMBER: LER6D08D010-EC6DR500210IC9030-6LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	211.3	15.0
10°-20°	534.0	37.9
20°-30°	479.7	34.1
30°-40°	150.2	10.7
40°-50°	26.3	1.9
50°-60°	5.2	0.4
60°-70°	0.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1225.1	87.0
0°-40°	1375.3	97.7
0°-60°	1406.8	99.9
0°-90°	1407.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1407.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2268	
5°	2236	211
15°	1941	534
25°	1076	480
35°	210	150
45°	31	26
55°	5	5
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P788528

CATALOG NUMBER: LER6D08D010-EC6DR500210IC9030-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2268.0
2.5°	2256.7
5°	2235.7
7.5°	2203.5
10°	2173.7
12.5°	2078.1
15°	1941.4
17.5°	1767.8
20°	1571.6
22.5°	1344.6
25°	1076.0
27.5°	791.0
30°	544.2
32.5°	354.3
35°	209.8
37.5°	120.5
40°	72.9
42.5°	47.4
45°	30.8
47.5°	18.7
50°	11.5
52.5°	7.8
55°	5.4
57.5°	3.6
60°	2.3
62.5°	1.3
65°	0.6
67.5°	0.2
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)