

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788610

Luminaire Tested: LER6D08D010-EC6DR600210IC9024-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P788610
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D08D010-EC6DR600210IC9024-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1075.0 lumens
Efficiency: N/A
Efficacy: 120.8 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P788610
CATALOG NUMBER: LER6D08D010-EC6DR600210IC9024-6LBDP1MW

Luminous Intensity Polar Plot

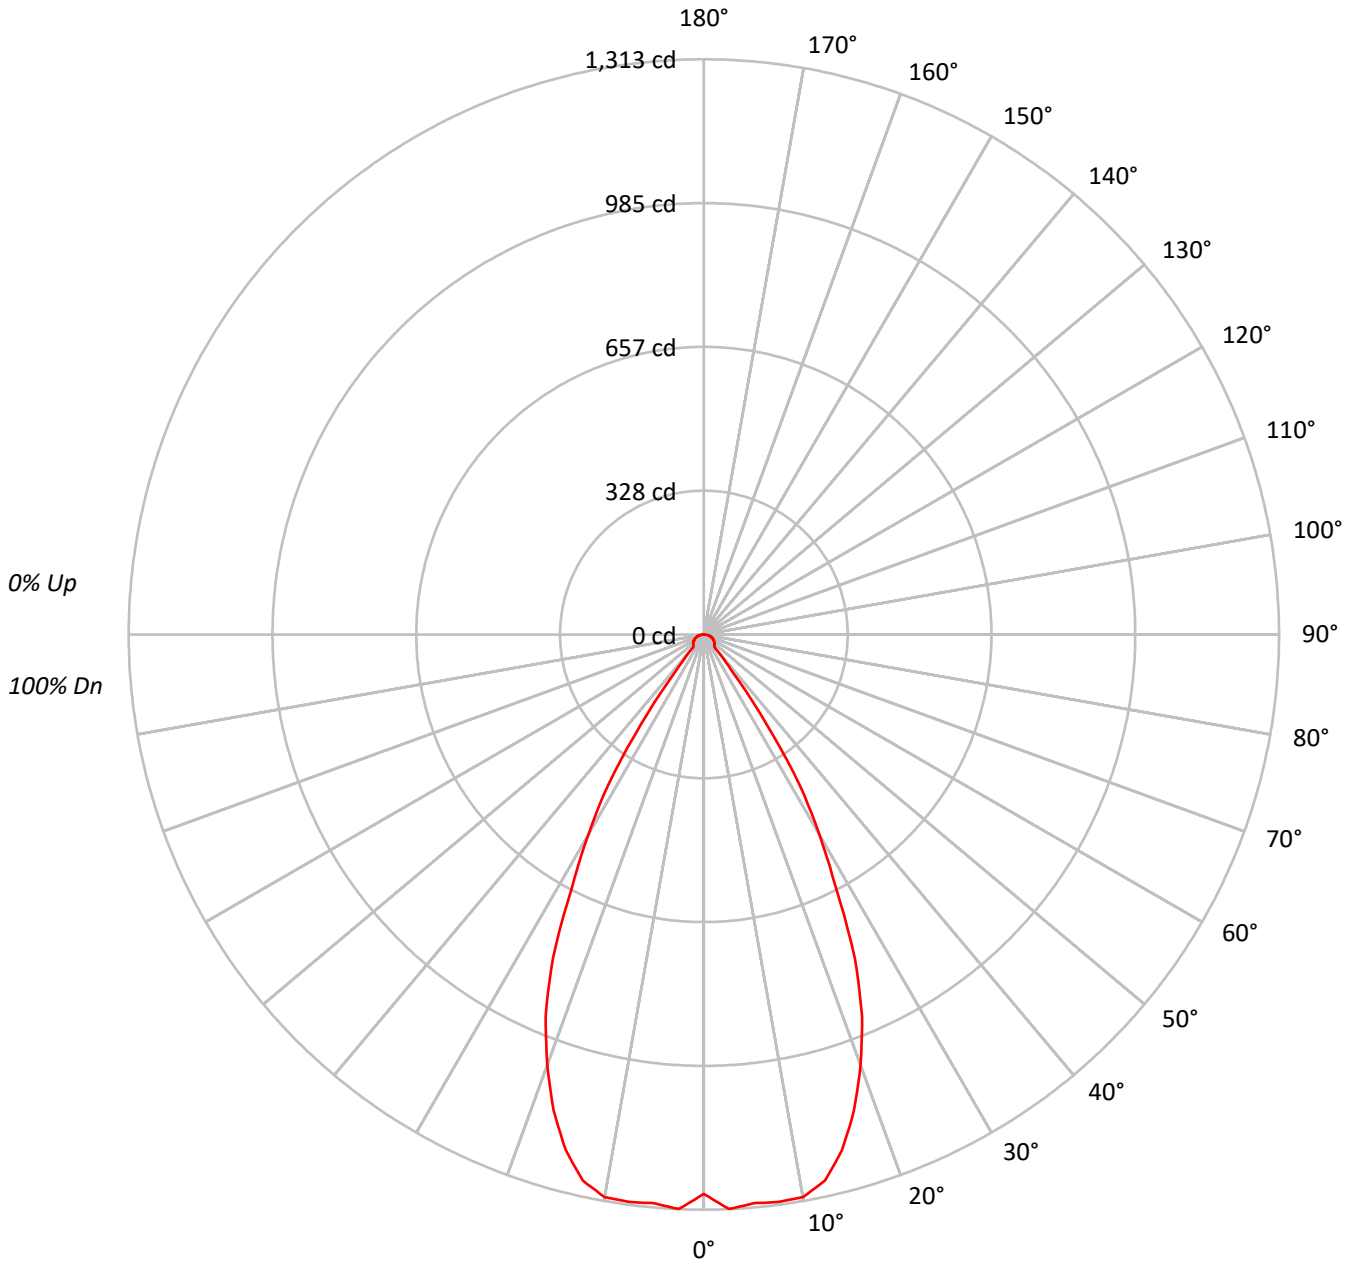



TEST NUMBER: P788610

CATALOG NUMBER: LER6D08D010-EC6DR600210IC9024-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53			53																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	139504
5°	142933
10°	144663
15°	137808
20°	121505
25°	98277
30°	66476
35°	33306
40°	5406
45°	5285
50°	5388
55°	5467
60°	5638
65°	5765
70°	5878
75°	5952
80°	5726
85°	4764

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 5952 cd/sqm



TEST NUMBER: P788610

CATALOG NUMBER: LER6D08D010-EC6DR600210IC9024-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.6	11.6
10°-20°	337.0	31.3
20°-30°	362.6	33.7
30°-40°	157.6	14.7
40°-50°	26.5	2.5
50°-60°	25.7	2.4
60°-70°	22.0	2.0
70°-80°	14.7	1.4
80°-90°	4.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	824.1	76.7
0°-40°	981.7	91.3
0°-60°	1033.9	96.2
0°-90°	1075.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1075.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1277	
5°	1303	125
15°	1218	337
25°	815	363
35°	250	158
45°	34	26
55°	29	26
65°	22	22
75°	14	15
85°	4	4
90°	0	



TEST NUMBER: P788610

CATALOG NUMBER: LER6D08D010-EC6DR600210IC9024-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1276.8
2.5°	1312.7
5°	1303.2
7.5°	1306.2
10°	1303.9
12.5°	1277.0
15°	1218.3
17.5°	1139.6
20°	1045.0
22.5°	943.8
25°	815.2
27.5°	652.0
30°	526.9
32.5°	406.1
35°	249.7
37.5°	106.8
40°	37.9
42.5°	34.9
45°	34.2
47.5°	33.1
50°	31.7
52.5°	30.2
55°	28.7
57.5°	27.3
60°	25.8
62.5°	24.1
65°	22.3
67.5°	20.4
70°	18.4
72.5°	16.3
75°	14.1
77.5°	11.6
80°	9.1
82.5°	6.5
85°	3.8
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)