

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788618

Luminaire Tested: LER6D08D010-EC6DR600210IC9027-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P788618  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D08D010-EC6DR600210IC9027-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1193.4 lumens  
Efficiency: N/A  
Efficacy: 134.1 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P788618

CATALOG NUMBER: LER6D08D010-EC6DR600210IC9027-6LBDP1MW

### Luminous Intensity Polar Plot

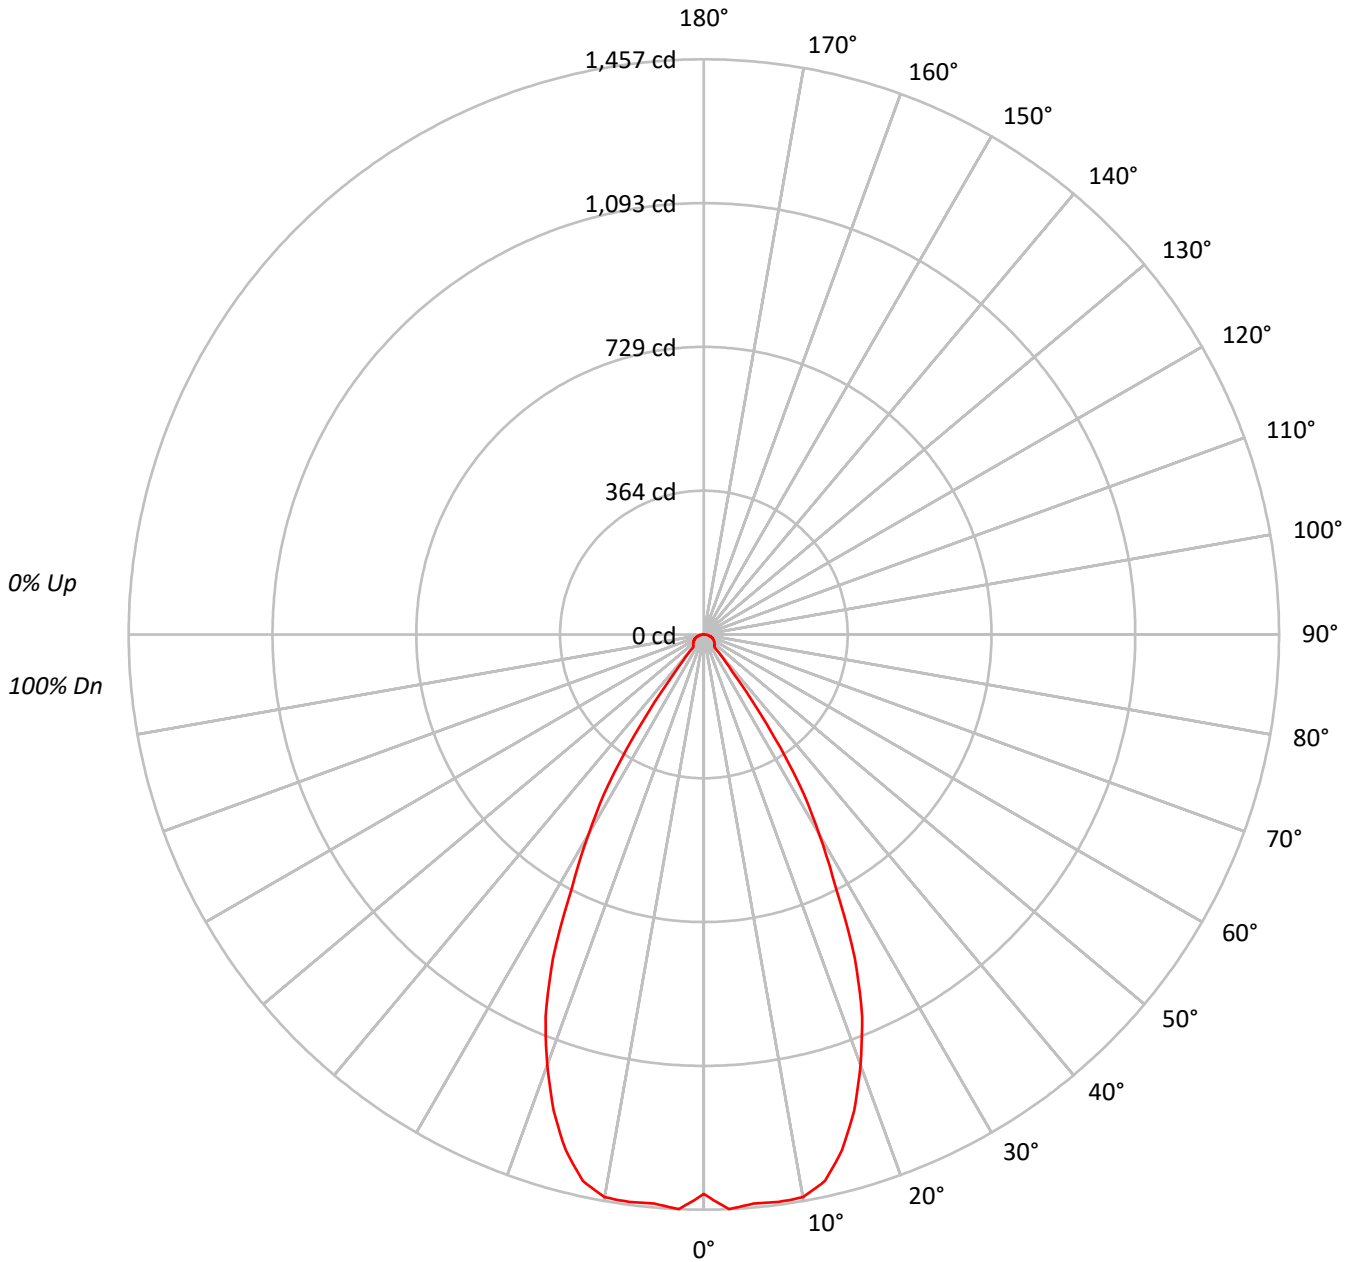



TEST NUMBER: P788618

CATALOG NUMBER: LER6D08D010-EC6DR600210IC9027-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93																
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86			86																
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80			80																
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75			75																
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			70																
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66			66																
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62			62																
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59			59																
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			55																
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53			53																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	154866
5°	158671
10°	160584
15°	152977
20°	134888
25°	109091
30°	73793
35°	36974
40°	6005
45°	5872
50°	5983
55°	6077
60°	6250
65°	6386
70°	6549
75°	6628
80°	6355
85°	5265

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 6628 cd/sqm



TEST NUMBER: P788618

CATALOG NUMBER: LER6D08D010-EC6DR600210IC9027-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	138.3	11.6
10°-20°	374.1	31.3
20°-30°	402.5	33.7
30°-40°	174.9	14.7
40°-50°	29.4	2.5
50°-60°	28.6	2.4
60°-70°	24.4	2.0
70°-80°	16.4	1.4
80°-90°	4.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	914.8	76.7
0°-40°	1089.8	91.3
0°-60°	1147.8	96.2
0°-90°	1193.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1193.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1417	
5°	1447	138
15°	1352	374
25°	905	402
35°	277	175
45°	38	29
55°	32	29
65°	25	24
75°	16	16
85°	4	5
90°	0	



TEST NUMBER: P788618

CATALOG NUMBER: LER6D08D010-EC6DR600210IC9027-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1417.4
2.5°	1457.2
5°	1446.7
7.5°	1450.0
10°	1447.4
12.5°	1417.6
15°	1352.4
17.5°	1265.0
20°	1160.1
22.5°	1047.7
25°	904.9
27.5°	723.8
30°	584.9
32.5°	450.8
35°	277.2
37.5°	118.6
40°	42.1
42.5°	38.7
45°	38.0
47.5°	36.7
50°	35.2
52.5°	33.6
55°	31.9
57.5°	30.3
60°	28.6
62.5°	26.7
65°	24.7
67.5°	22.7
70°	20.5
72.5°	18.1
75°	15.7
77.5°	12.9
80°	10.1
82.5°	7.2
85°	4.2
87.5°	1.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)