

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788663

Luminaire Tested: LER6D08D010-EC6DR650210IC9027-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P788663
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D08D010-EC6DR650210IC9027-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 857.8 lumens
Efficiency: N/A
Efficacy: 96.4 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P788663

CATALOG NUMBER: LER6D08D010-EC6DR650210IC9027-6LBDP1B

Luminous Intensity Polar Plot

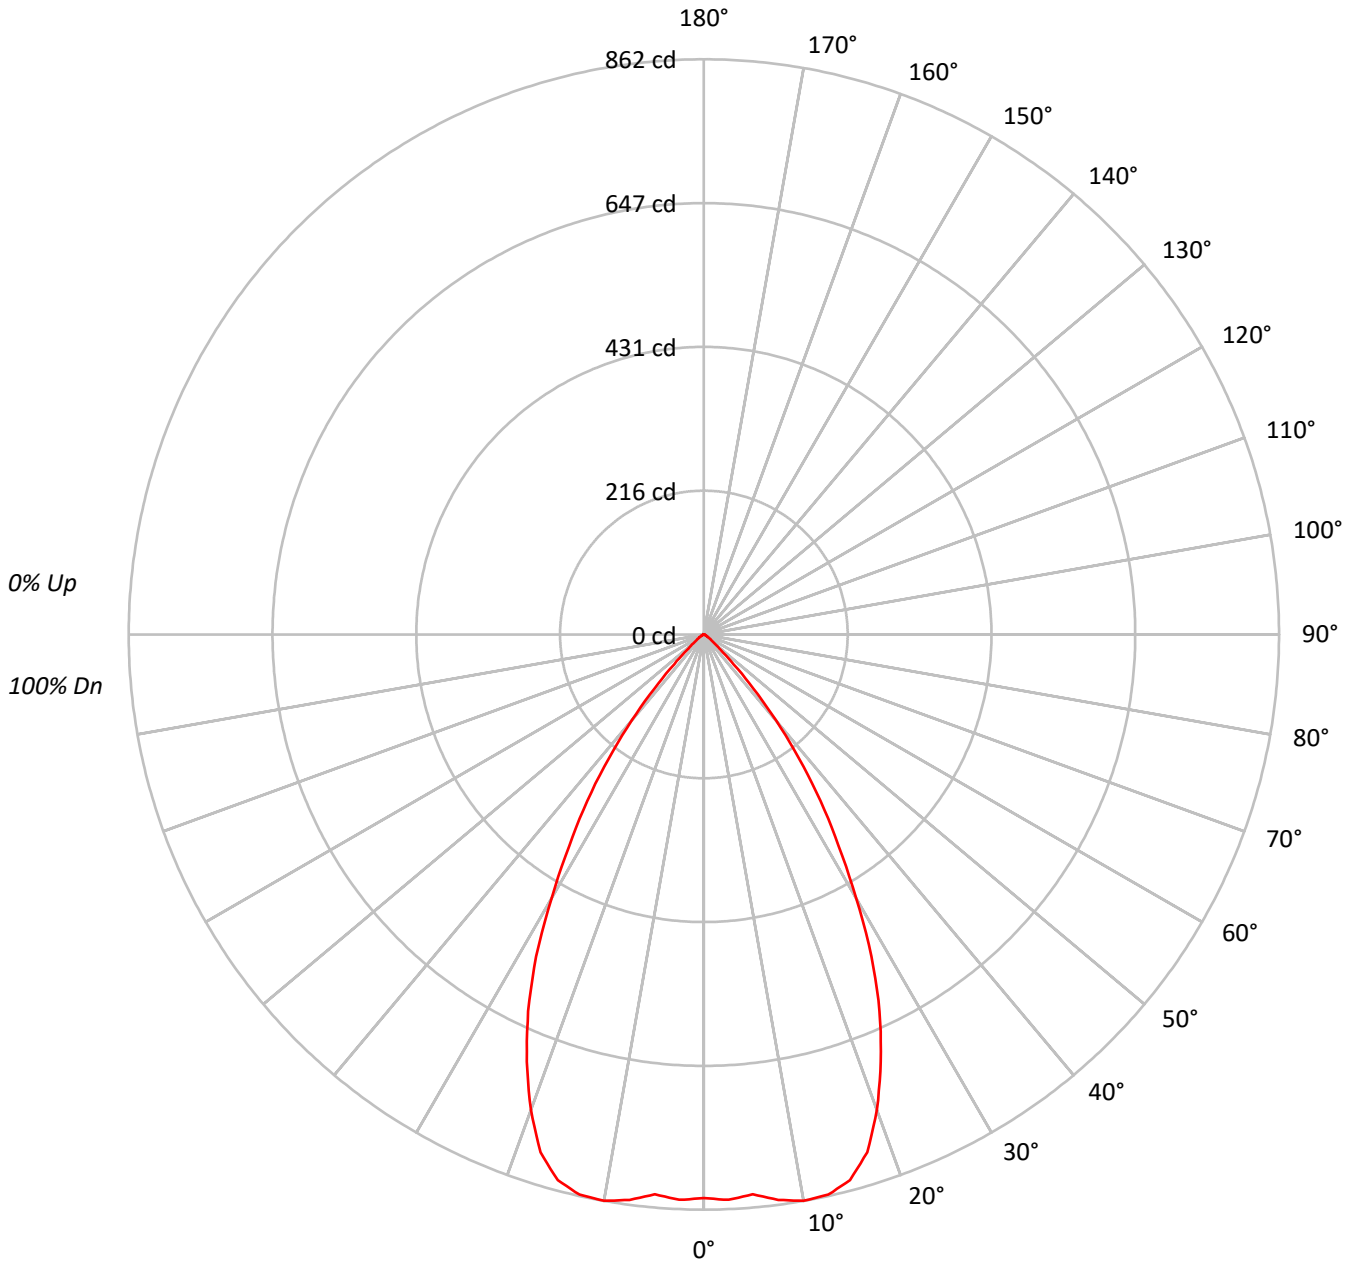



TEST NUMBER: P788663

CATALOG NUMBER: LER6D08D010-EC6DR650210IC9027-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	92271
5°	92349
10°	95602
15°	95752
20°	88158
25°	75118
30°	57505
35°	40628
40°	23976
45°	9735
50°	3536
55°	1962
60°	1136
65°	620
70°	639
75°	507
80°	503
85°	501

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9735 cd/sqm



TEST NUMBER: P788663

CATALOG NUMBER: LER6D08D010-EC6DR650210IC9027-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.3	9.5
10°-20°	234.6	27.3
20°-30°	281.4	32.8
30°-40°	189.1	22.0
40°-50°	56.6	6.6
50°-60°	10.0	1.2
60°-70°	2.9	0.3
70°-80°	1.4	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	597.3	69.6
0°-40°	786.4	91.7
0°-60°	853.1	99.5
0°-90°	857.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	857.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	844	
5°	842	81
15°	846	235
25°	623	281
35°	305	189
45°	63	57
55°	10	10
65°	2	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P788663

CATALOG NUMBER: LER6D08D010-EC6DR650210IC9027-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	844.5
2.5°	848.1
5°	842.0
7.5°	854.7
10°	861.7
12.5°	860.0
15°	846.5
17.5°	813.7
20°	758.2
22.5°	692.9
25°	623.1
27.5°	544.2
30°	455.8
32.5°	375.6
35°	304.6
37.5°	234.4
40°	168.1
42.5°	109.8
45°	63.0
47.5°	33.4
50°	20.8
52.5°	14.4
55°	10.3
57.5°	7.4
60°	5.2
62.5°	3.4
65°	2.4
67.5°	2.2
70°	2.0
72.5°	1.6
75°	1.2
77.5°	1.1
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)