

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788706

Luminaire Tested: LER6D08D010-EC6DR700210IC9024-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P788706
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D08D010-EC6DR700210IC9024-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 933.4 lumens
Efficiency: N/A
Efficacy: 104.9 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P788706

CATALOG NUMBER: LER6D08D010-EC6DR700210IC9024-6LBDP1MW

Luminous Intensity Polar Plot

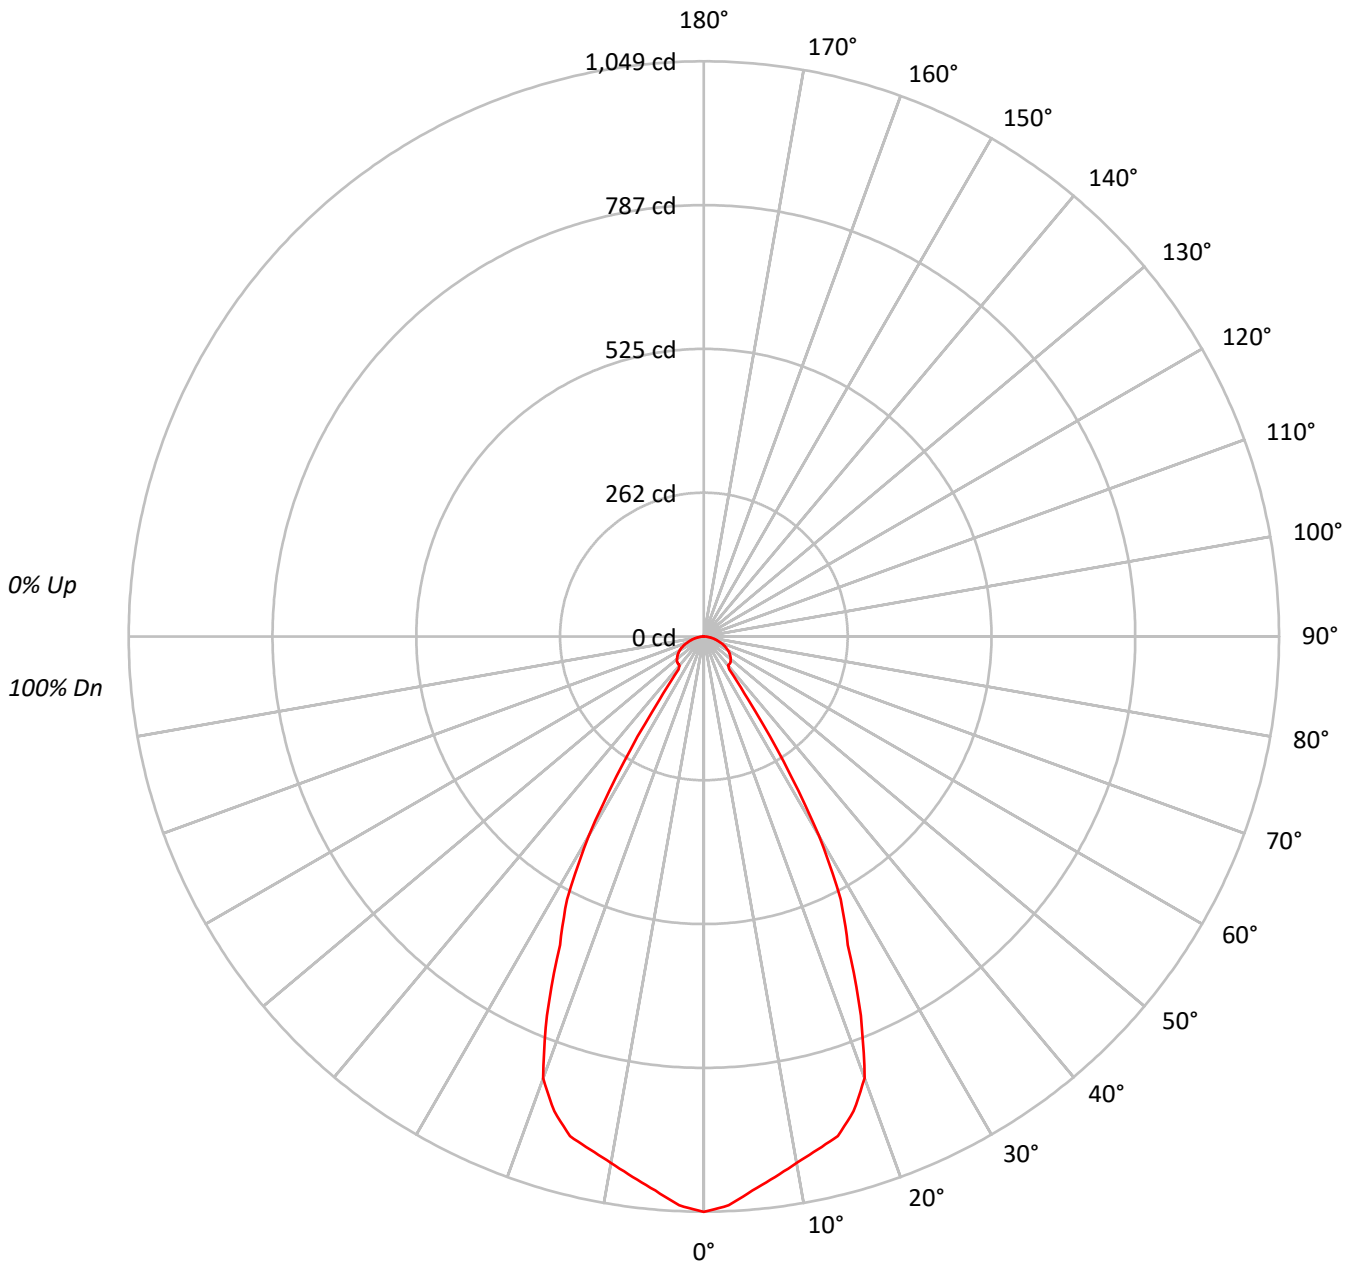



TEST NUMBER: P788706

CATALOG NUMBER: LER6D08D010-EC6DR700210IC9024-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	114658
5°	111247
10°	108150
15°	106724
20°	99657
25°	74865
30°	52926
35°	18754
40°	9856
45°	10507
50°	10879
55°	11087
60°	11145
65°	10910
70°	10287
75°	9541
80°	8494
85°	6895

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 60°
 Luminance: 11145 cd/sqm



TEST NUMBER: P788706

CATALOG NUMBER: LER6D08D010-EC6DR700210IC9024-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.7	10.2
10°-20°	262.4	28.1
20°-30°	289.0	31.0
30°-40°	110.4	11.8
40°-50°	52.2	5.6
50°-60°	51.8	5.6
60°-70°	41.5	4.4
70°-80°	23.8	2.6
80°-90°	6.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	647.1	69.3
0°-40°	757.5	81.2
0°-60°	861.5	92.3
0°-90°	933.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	933.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1049	
5°	1014	96
15°	944	262
25°	621	289
35°	141	110
45°	68	52
55°	58	52
65°	42	41
75°	23	24
85°	6	7
90°	0	



TEST NUMBER: P788706

CATALOG NUMBER: LER6D08D010-EC6DR700210IC9024-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1049.4
2.5°	1038.4
5°	1014.3
7.5°	994.2
10°	974.8
12.5°	958.3
15°	943.5
17.5°	907.8
20°	857.1
22.5°	747.8
25°	621.0
27.5°	540.6
30°	419.5
32.5°	271.0
35°	140.6
37.5°	75.9
40°	69.1
42.5°	68.6
45°	68.0
47.5°	66.5
50°	64.0
52.5°	61.1
55°	58.2
57.5°	54.8
60°	51.0
62.5°	46.7
65°	42.2
67.5°	37.2
70°	32.2
72.5°	27.2
75°	22.6
77.5°	17.8
80°	13.5
82.5°	9.5
85°	5.5
87.5°	2.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)