

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788825

Luminaire Tested: LER6D10D010-EC6DR150210IC9035-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P788825  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D10D010-EC6DR150210IC9035-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1163.5 lumens  
Efficiency: N/A  
Efficacy: 99.4 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct


Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P788825  
CATALOG NUMBER: LER6D10D010-EC6DR150210IC9035-6LBDP1LI

### Luminous Intensity Polar Plot

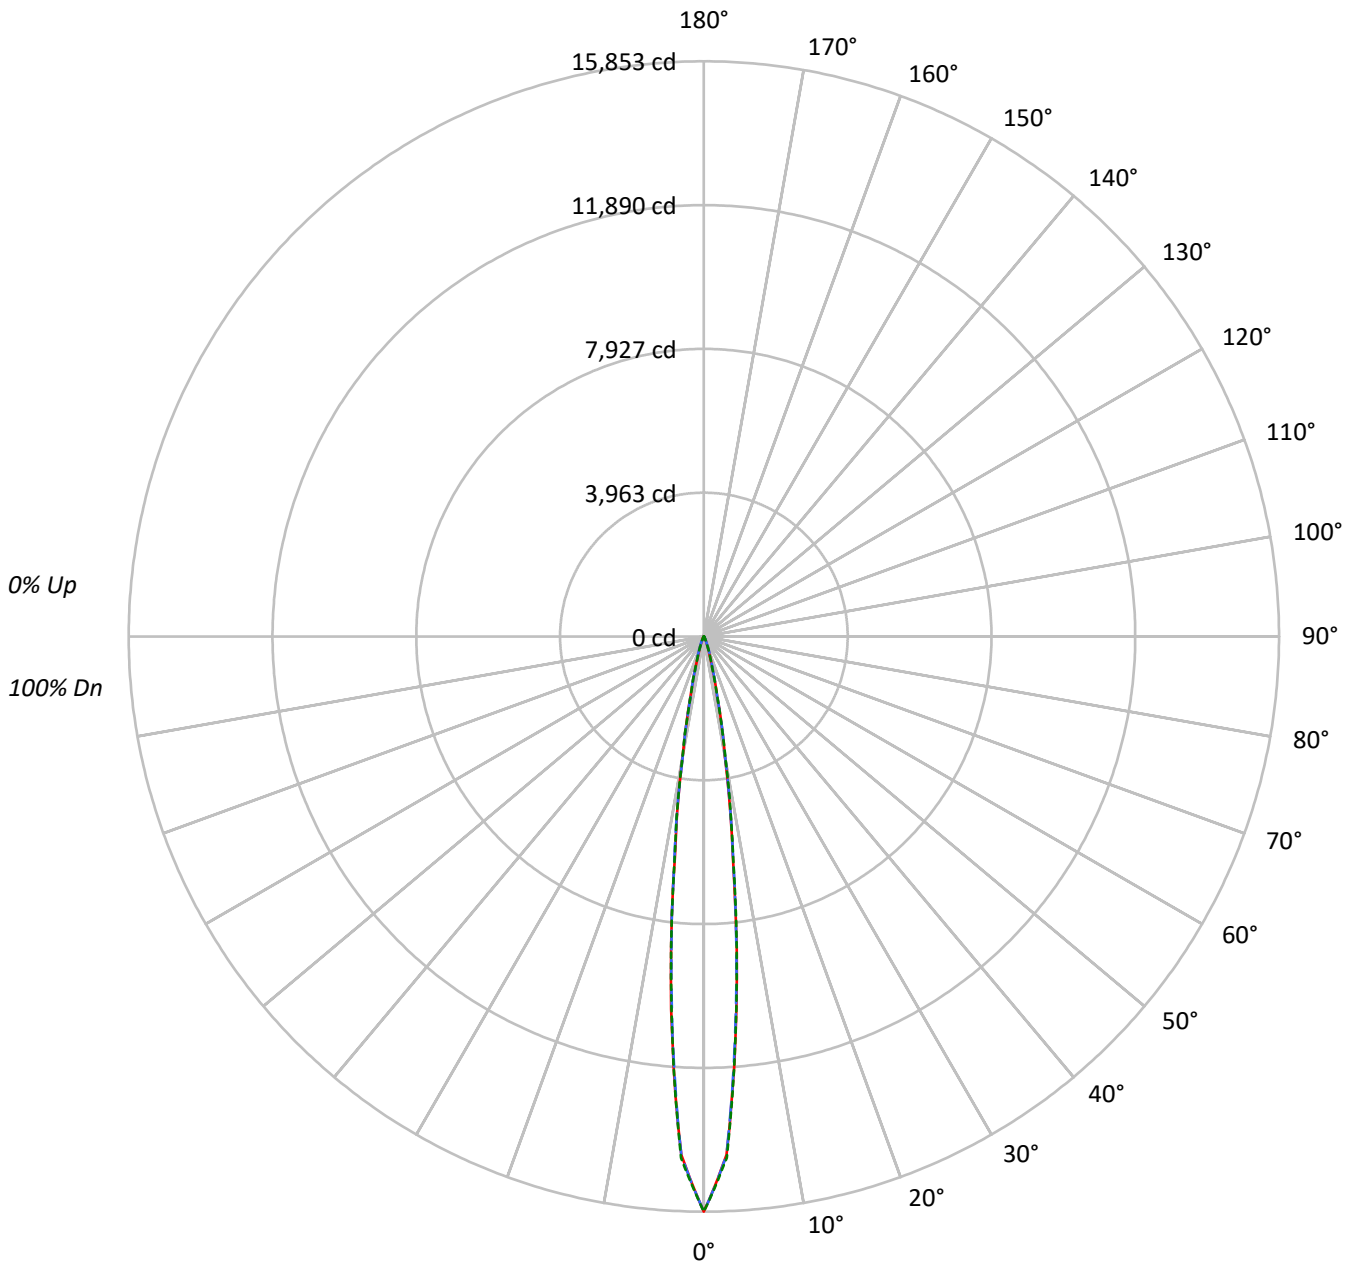



TEST NUMBER: P788825

CATALOG NUMBER: LER6D10D010-EC6DR150210IC9035-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98			98																
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96			96																
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94			94																
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93			93																
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92			92																
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90			90																
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89			89																
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88			88																
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87			87																
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86			86																

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1783756	1783756	1783756
5°	1048221	1034643	1042835
10°	312842	315034	319858
15°	77815	79335	76886
20°	23279	26961	23778
25°	8211	10454	8312
30°	3018	3969	3063
35°	1510	1707	1460
40°	952	1051	952
45°	707	749	707
50°	563	563	563
55°	466	466	466
60°	379	379	379
65°	285	285	285
70°	249	249	249
75°	151	151	204
80°	102	102	102
85°	58	58	58

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 749 cd/sqm



TEST NUMBER: P788825

CATALOG NUMBER: LER6D10D010-EC6DR150210IC9035-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	754.6	64.9
10°-20°	310.4	26.7
20°-30°	61.7	5.3
30°-40°	15.4	1.3
40°-50°	8.1	0.7
50°-60°	6.0	0.5
60°-70°	4.2	0.4
70°-80°	2.4	0.2
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1126.7	96.8
0°-40°	1142.1	98.2
0°-60°	1156.2	99.4
0°-90°	1163.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1163.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	15853	15853	15853	15853	15853	
5°	10314	10208	10181	10251	10261	753
15°	896	913	913	897	885	307
25°	105	120	134	119	107	55
35°	21	22	24	22	20	14
45°	10	10	11	10	10	8
55°	7	7	7	7	7	6
65°	4	4	4	4	4	4
75°	2	2	2	2	3	2
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P788825

CATALOG NUMBER: LER6D10D010-EC6DR150210IC9035-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	15852.8	15852.8	15852.8	15852.8	15852.8
2.5°	14299.9	14311.9	14316.6	14330.7	14383.1
5°	10314.2	10208.1	10180.6	10251.1	10261.2
7.5°	6109.7	6131.2	6209.7	6227.2	6164.1
10°	3352.8	3380.3	3376.3	3400.5	3428.0
12.5°	1714.7	1693.2	1686.5	1714.0	1675.7
15°	895.9	912.7	913.4	897.3	885.2
17.5°	481.9	501.3	533.5	507.4	467.1
20°	284.5	302.0	329.5	308.0	290.6
22.5°	175.8	189.9	209.4	192.6	178.5
25°	105.4	119.5	134.2	118.8	106.7
27.5°	62.4	74.5	83.9	73.8	61.7
30°	40.3	47.0	53.0	46.3	40.9
32.5°	28.2	30.9	33.6	30.9	28.2
35°	20.8	22.1	23.5	22.1	20.1
37.5°	16.1	17.4	18.1	16.8	15.4
40°	13.4	14.1	14.8	14.1	13.4
42.5°	11.4	12.1	12.1	12.1	11.4
45°	10.1	10.1	10.7	10.1	10.1
47.5°	8.7	8.7	9.4	8.7	8.7
50°	8.1	8.1	8.1	8.1	8.1
52.5°	7.4	7.4	7.4	7.4	7.4
55°	6.7	6.7	6.7	6.7	6.7
57.5°	6.0	6.0	6.0	6.0	6.0
60°	5.4	5.4	5.4	5.4	5.4
62.5°	4.7	4.7	4.7	4.7	4.7
65°	4.0	4.0	4.0	4.0	4.0
67.5°	4.0	4.0	4.0	4.0	4.0
70°	3.4	3.4	3.4	3.4	3.4
72.5°	2.7	2.7	2.7	2.7	2.7
75°	2.0	2.0	2.0	2.0	2.7
77.5°	2.0	2.0	2.0	2.0	2.0
80°	1.3	1.3	1.3	1.3	1.3
82.5°	1.3	1.3	1.3	1.3	1.3
85°	0.7	0.7	0.7	0.7	0.7
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)