

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788886

Luminaire Tested: LER6D10D010-EC6DR200210IC9040-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P788886
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D10D010-EC6DR200210IC9040-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1194.8 lumens
Efficiency: N/A
Efficacy: 102.1 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P788886

CATALOG NUMBER: LER6D10D010-EC6DR200210IC9040-6LBS1MW

Luminous Intensity Polar Plot

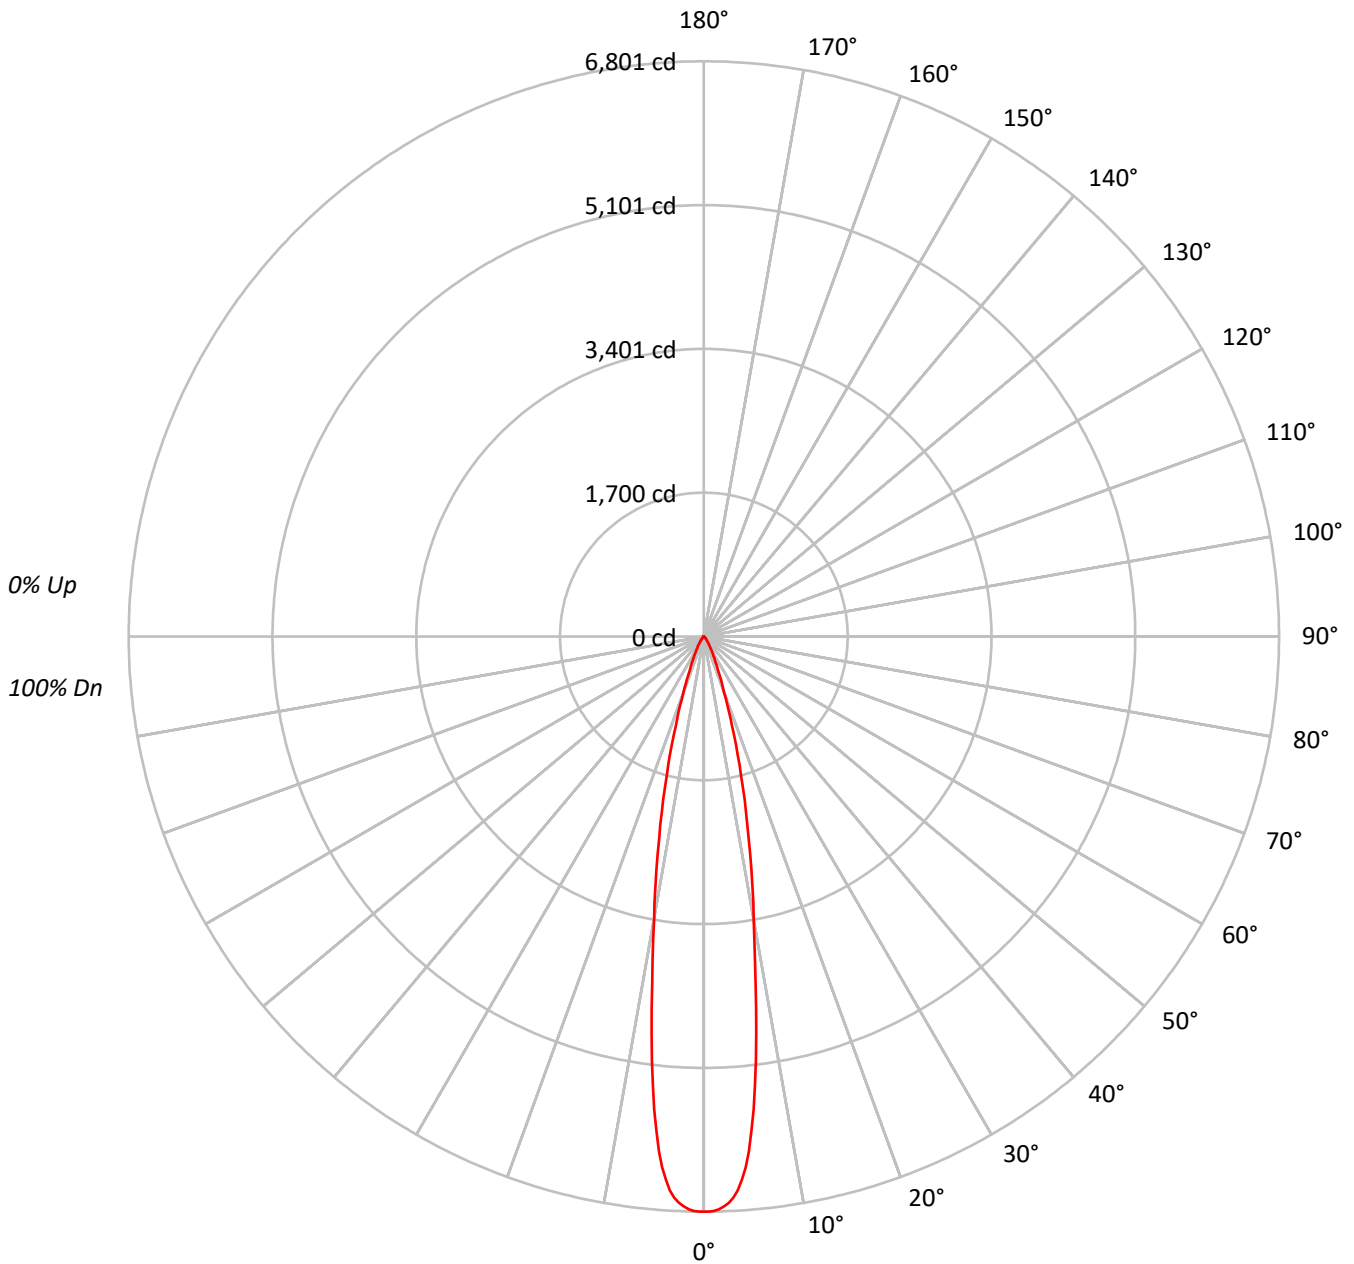



TEST NUMBER: P788886

CATALOG NUMBER: LER6D10D010-EC6DR200210IC9040-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|-----|----|----|----|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 | | | | | | | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | 100 | | | | | | | | | | | | | | | | | | |
| 1 | 115 | 113 | 111 | 109 | 113 | 111 | 109 | 108 | 107 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 98 | 96 | 95 | 94 | 94 | 92 | 91 | 91 | 89 | 88 | 86 | 85 | | | | | | | | | | | | | | | |
| 2 | 111 | 108 | 105 | 102 | 109 | 106 | 104 | 101 | 103 | 101 | 99 | 100 | 99 | 97 | 98 | 96 | 95 | 94 | 94 | 92 | 91 | 89 | 88 | 86 | 85 | 85 | 83 | 82 | 81 | | | | | | | | | | | | | | | | |
| 3 | 108 | 103 | 100 | 97 | 106 | 102 | 99 | 96 | 100 | 97 | 95 | 97 | 95 | 93 | 95 | 93 | 92 | 91 | 91 | 89 | 88 | 86 | 85 | 85 | 83 | 82 | 81 | 80 | 79 | | | | | | | | | | | | | | | | |
| 4 | 105 | 99 | 96 | 93 | 103 | 98 | 95 | 92 | 96 | 93 | 91 | 95 | 92 | 90 | 93 | 91 | 89 | 88 | 88 | 86 | 84 | 83 | 82 | 81 | 80 | 79 | 78 | 77 | | | | | | | | | | | | | | | | | |
| 5 | 102 | 96 | 92 | 89 | 100 | 95 | 91 | 89 | 94 | 90 | 88 | 92 | 89 | 87 | 91 | 88 | 86 | 85 | 85 | 83 | 82 | 81 | 80 | 79 | 78 | 77 | 76 | | | | | | | | | | | | | | | | | | |
| 6 | 99 | 93 | 89 | 86 | 98 | 92 | 88 | 86 | 91 | 87 | 85 | 90 | 87 | 84 | 88 | 86 | 84 | 83 | 83 | 81 | 80 | 79 | 78 | 77 | 76 | | | | | | | | | | | | | | | | | | | | |
| 7 | 96 | 90 | 86 | 83 | 95 | 89 | 86 | 83 | 88 | 85 | 82 | 87 | 84 | 82 | 86 | 84 | 82 | 81 | 81 | 79 | 78 | 77 | 76 | | | | | | | | | | | | | | | | | | | | | | |
| 8 | 94 | 87 | 83 | 81 | 93 | 87 | 83 | 80 | 86 | 83 | 80 | 85 | 82 | 80 | 84 | 82 | 80 | 79 | 79 | 77 | 76 | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | 91 | 85 | 81 | 78 | 91 | 85 | 81 | 78 | 84 | 80 | 78 | 83 | 80 | 78 | 82 | 80 | 78 | 77 | 77 | 75 | 74 | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | 89 | 83 | 79 | 76 | 88 | 82 | 79 | 76 | 82 | 78 | 76 | 81 | 78 | 76 | 81 | 78 | 76 | 75 | 75 | 73 | 72 | | | | | | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 743050 |
| 5° | 670364 |
| 10° | 376241 |
| 15° | 191255 |
| 20° | 80972 |
| 25° | 37384 |
| 30° | 19782 |
| 35° | 10657 |
| 40° | 5705 |
| 45° | 3368 |
| 50° | 1955 |
| 55° | 1048 |
| 60° | 656 |
| 65° | 465 |
| 70° | 192 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3368 cd/sqm



TEST NUMBER: P788886

CATALOG NUMBER: LER6D10D010-EC6DR200210IC9040-6LBS1MW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 484.2 | 40.5 |
| 10°-20° | 476.8 | 39.9 |
| 20°-30° | 155.8 | 13.0 |
| 30°-40° | 53.0 | 4.4 |
| 40°-50° | 17.8 | 1.5 |
| 50°-60° | 5.4 | 0.4 |
| 60°-70° | 1.8 | 0.1 |
| 70°-80° | 0.1 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1116.7 | 93.5 |
| 0°-40° | 1169.8 | 97.9 |
| 0°-60° | 1193.0 | 99.8 |
| 0°-90° | 1194.8 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1194.8 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 6801 | |
| 5° | 6112 | 484 |
| 15° | 1691 | 477 |
| 25° | 310 | 156 |
| 35° | 80 | 53 |
| 45° | 22 | 18 |
| 55° | 6 | 5 |
| 65° | 2 | 2 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P788886

CATALOG NUMBER: LER6D10D010-EC6DR200210IC9040-6LBS1MW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 6800.7 |
| 0.5° | 6800.7 |
| 1° | 6792.2 |
| 1.5° | 6775.2 |
| 2° | 6744.3 |
| 2.5° | 6703.2 |
| 3° | 6645.0 |
| 3.5° | 6563.9 |
| 4° | 6443.4 |
| 4.5° | 6296.8 |
| 5° | 6112.1 |
| 5.5° | 5869.3 |
| 6° | 5620.4 |
| 6.5° | 5335.2 |
| 7° | 5056.0 |
| 7.5° | 4729.0 |
| 8° | 4437.1 |
| 8.5° | 4143.4 |
| 9° | 3872.1 |
| 9.5° | 3623.2 |
| 10° | 3391.2 |
| 12.5° | 2435.0 |
| 15° | 1690.8 |
| 17.5° | 1104.6 |
| 20° | 696.4 |
| 22.5° | 451.2 |
| 25° | 310.1 |
| 27.5° | 218.0 |
| 30° | 156.8 |
| 32.5° | 112.6 |
| 35° | 79.9 |
| 37.5° | 55.7 |
| 40° | 40.0 |
| 42.5° | 29.1 |
| 45° | 21.8 |
| 47.5° | 17.0 |
| 50° | 11.5 |
| 52.5° | 7.3 |
| 55° | 5.5 |
| 57.5° | 4.2 |
| 60° | 3.0 |
| 62.5° | 2.4 |
| 65° | 1.8 |



TEST NUMBER: P788886
CATALOG NUMBER: LER6D10D010-EC6DR200210IC9040-6LBS1MW

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|-----|
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



| | | |
|-------|--|-----|
| 67.5° | | 1.2 |
| 70° | | 0.6 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)