

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P788895

Luminaire Tested: LER6D10D010-EC6DR250210IC9024-6LBDP1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P788895
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D10D010-EC6DR250210IC9024-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 25° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1114.3 lumens
Efficiency: N/A
Efficacy: 95.2 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P788895

CATALOG NUMBER: LER6D10D010-EC6DR250210IC9024-6LBDP1B

Luminous Intensity Polar Plot

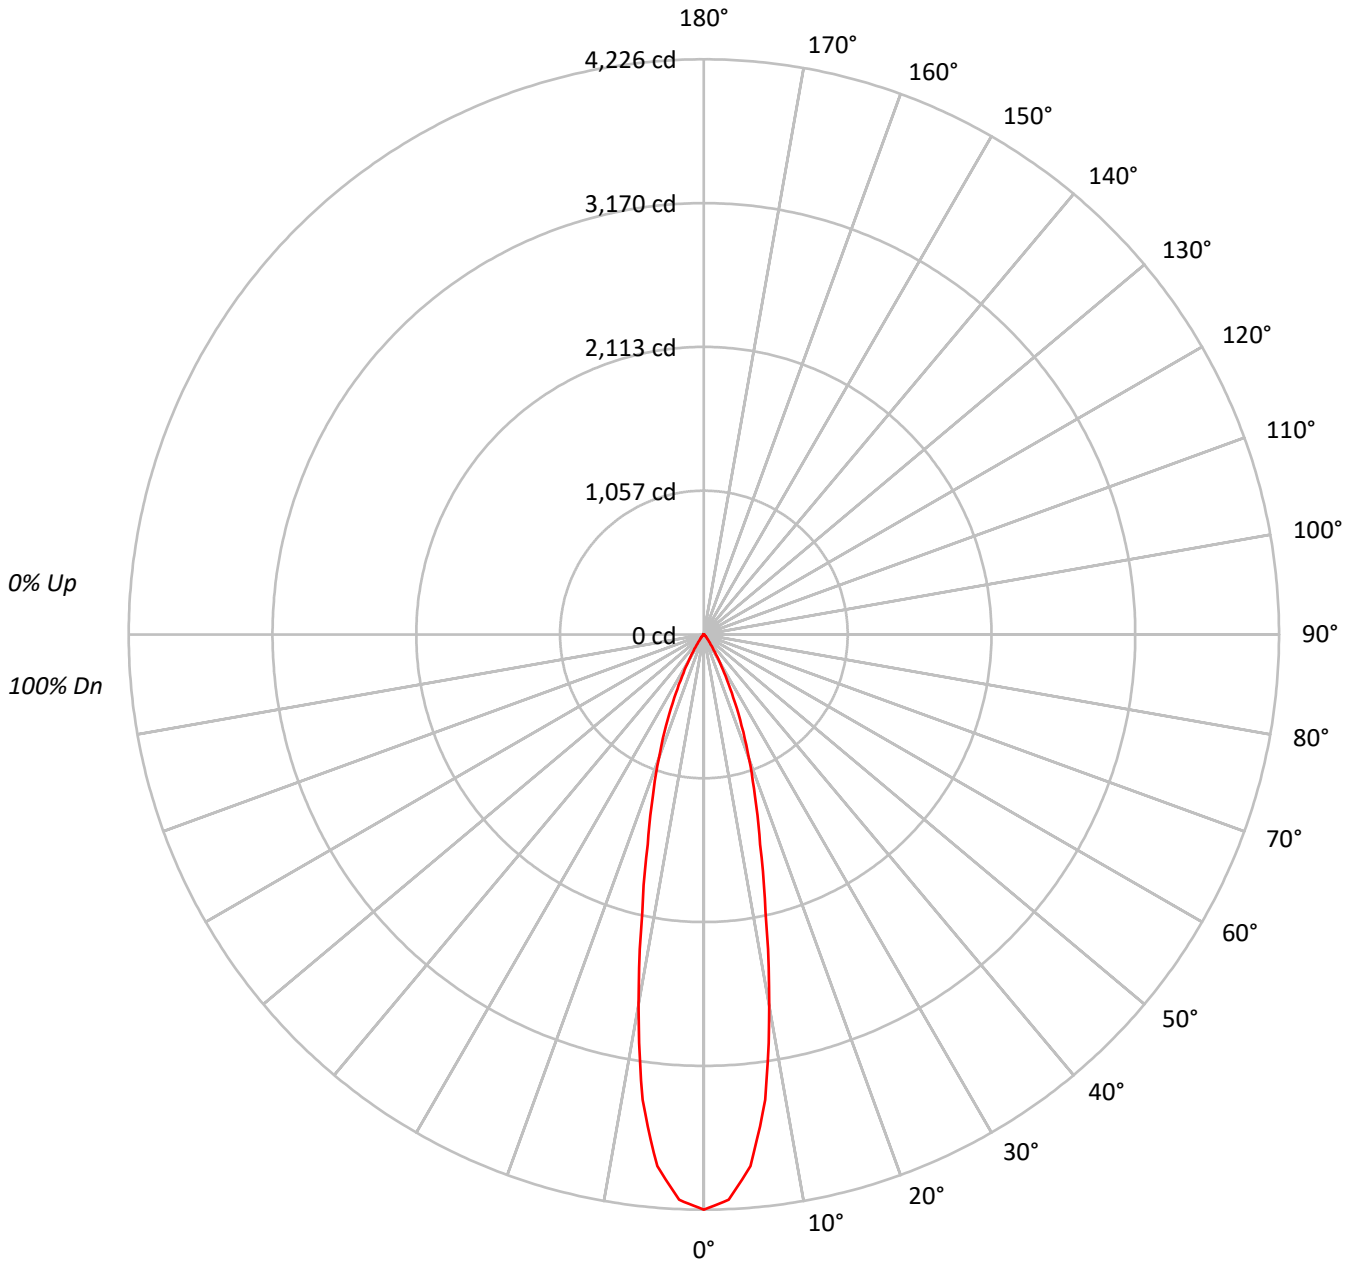



TEST NUMBER: P788895

CATALOG NUMBER: LER6D10D010-EC6DR250210IC9024-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																
	1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96	96	96	96	96	96	96	96	96	96	96																
	2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92	92	92	92	92	92	92	92	92	92	92	92															
	3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89	89	89	89	89	89	89	89	89	89	89	89															
	4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85	85	85	85	85	85	85	85	85	85	85	85															
	5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82	82	82	82	82	82	82	82	82	82	82	82															
	6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79	79	79	79	79	79	79	79	79	79	79	79															
	7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77	77	77	77	77	77	77	77	77	77	77	77															
	8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74	74	74	74	74	74	74	74	74	74	74	74															
	9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72	72	72	72	72	72	72	72	72	72	72	72															
	10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69	69	69	69	69	69	69	69	69	69	69	69															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	461758
5°	430070
10°	306778
15°	180679
20°	112424
25°	61701
30°	28210
35°	10684
40°	4835
45°	2905
50°	1207
55°	781
60°	546
65°	362
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2905 cd/sqm



TEST NUMBER: P788895

CATALOG NUMBER: LER6D10D010-EC6DR250210IC9024-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	337.0	30.2
10°-20°	456.4	41.0
20°-30°	241.5	21.7
30°-40°	59.6	5.4
40°-50°	14.5	1.3
50°-60°	3.8	0.3
60°-70°	1.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1035.0	92.9
0°-40°	1094.6	98.2
0°-60°	1113.0	99.9
0°-90°	1114.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1114.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4226	
5°	3921	337
15°	1597	456
25°	512	242
35°	80	60
45°	19	15
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P788895

CATALOG NUMBER: LER6D10D010-EC6DR250210IC9024-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	4226.2
2.5°	4156.8
5°	3921.2
7.5°	3448.0
10°	2765.1
12.5°	2090.3
15°	1597.3
17.5°	1244.9
20°	966.9
22.5°	725.1
25°	511.8
27.5°	343.2
30°	223.6
32.5°	136.1
35°	80.1
37.5°	49.0
40°	33.9
42.5°	25.9
45°	18.8
47.5°	11.4
50°	7.1
52.5°	5.2
55°	4.1
57.5°	3.2
60°	2.5
62.5°	2.0
65°	1.4
67.5°	0.5
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)