

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789261

Luminaire Tested: LER6D10D010-EC6DR600210IC9035-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P789261  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-60)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER6D10D010-EC6DR600210IC9035-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2122.6 lumens  
Efficiency: N/A  
Efficacy: 181.4 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P789261  
CATALOG NUMBER: LER6D10D010-EC6DR600210IC9035-6LBS1LI

### Luminous Intensity Polar Plot

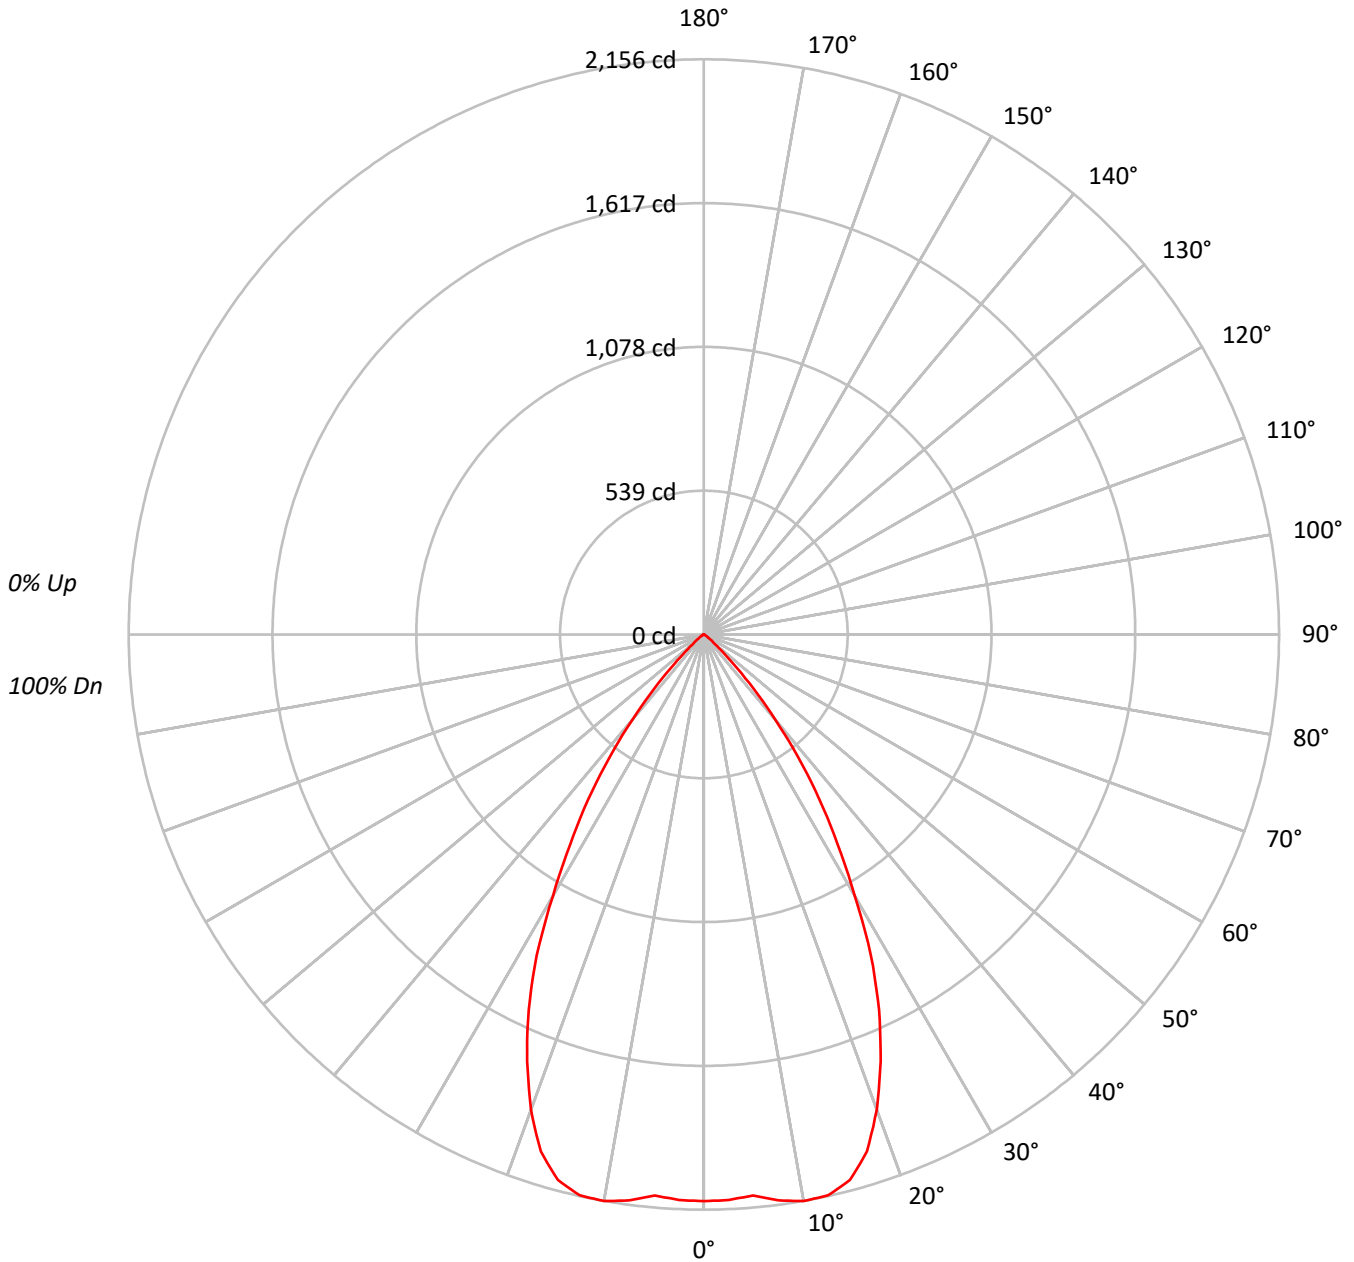



TEST NUMBER: P789261

CATALOG NUMBER: LER6D10D010-EC6DR600210IC9035-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 114 | 111 | 108 | 106 | 111 | 109 | 106 | 104 | 105 | 103 | 101 | 101 | 99  | 98  | 97  | 96  | 95  | 94  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 108 | 103 | 99  | 96  | 106 | 101 | 98  | 95  | 98  | 95  | 92  | 95  | 93  | 90  | 92  | 90  | 89  | 87  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 102 | 96  | 91  | 87  | 100 | 95  | 90  | 86  | 92  | 88  | 85  | 90  | 86  | 84  | 87  | 85  | 82  | 81  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 97  | 90  | 84  | 80  | 95  | 88  | 83  | 79  | 86  | 82  | 78  | 84  | 81  | 78  | 82  | 79  | 77  | 75  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 92  | 84  | 78  | 74  | 91  | 83  | 77  | 73  | 81  | 76  | 73  | 79  | 75  | 72  | 78  | 74  | 71  | 70  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 87  | 79  | 73  | 68  | 86  | 78  | 72  | 68  | 76  | 71  | 68  | 75  | 70  | 67  | 74  | 70  | 67  | 65  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 83  | 74  | 68  | 63  | 82  | 73  | 67  | 63  | 72  | 67  | 63  | 71  | 66  | 63  | 69  | 65  | 62  | 61  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 79  | 69  | 63  | 59  | 78  | 69  | 63  | 59  | 68  | 63  | 59  | 67  | 62  | 59  | 66  | 61  | 58  | 57  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 75  | 65  | 59  | 55  | 74  | 65  | 59  | 55  | 64  | 59  | 55  | 63  | 58  | 55  | 62  | 58  | 55  | 53  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 72  | 62  | 56  | 52  | 71  | 61  | 56  | 52  | 61  | 55  | 52  | 60  | 55  | 52  | 59  | 55  | 52  | 50  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°     |
|-----|--------|
| 0°  | 232081 |
| 5°  | 231520 |
| 10° | 239211 |
| 15° | 239453 |
| 20° | 220325 |
| 25° | 187404 |
| 30° | 142792 |
| 35° | 100984 |
| 40° | 59291  |
| 45° | 23919  |
| 50° | 7989   |
| 55° | 3848   |
| 60° | 1573   |
| 65° | 233    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23919 cd/sqm



TEST NUMBER: P789261

CATALOG NUMBER: LER6D10D010-EC6DR600210IC9035-6LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 203.6  | 9.6       |
| 10°-20°   | 586.5  | 27.6      |
| 20°-30°   | 701.9  | 33.1      |
| 30°-40°   | 469.5  | 22.1      |
| 40°-50°   | 139.2  | 6.6       |
| 50°-60°   | 20.0   | 0.9       |
| 60°-70°   | 1.9    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1492.0 | 70.3      |
| 0°-40°    | 1961.5 | 92.4      |
| 0°-60°    | 2120.7 | 99.9      |
| 0°-90°    | 2122.6 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2122.6 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2124 |      |
| 5°  | 2111 | 204  |
| 15° | 2117 | 586  |
| 25° | 1554 | 702  |
| 35° | 757  | 469  |
| 45° | 155  | 139  |
| 55° | 20   | 20   |
| 65° | 1    | 2    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P789261

CATALOG NUMBER: LER6D10D010-EC6DR600210IC9035-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 2124.1 |
| 2.5°  | 2121.4 |
| 5°    | 2110.9 |
| 7.5°  | 2139.5 |
| 10°   | 2156.1 |
| 12.5° | 2153.1 |
| 15°   | 2116.9 |
| 17.5° | 2031.7 |
| 20°   | 1894.9 |
| 22.5° | 1730.7 |
| 25°   | 1554.5 |
| 27.5° | 1355.9 |
| 30°   | 1131.8 |
| 32.5° | 931.8  |
| 35°   | 757.1  |
| 37.5° | 582.0  |
| 40°   | 415.7  |
| 42.5° | 274.1  |
| 45°   | 154.8  |
| 47.5° | 79.2   |
| 50°   | 47.0   |
| 52.5° | 30.4   |
| 55°   | 20.2   |
| 57.5° | 13.0   |
| 60°   | 7.2    |
| 62.5° | 3.0    |
| 65°   | 0.9    |
| 67.5° | 0.3    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)