

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789432

Luminaire Tested: LER6D15D010-EC6DR1515309027-6LBDP1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789432
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR1515309027-6LBDDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1434.3 lumens
Efficiency: N/A
Efficacy: 90.8 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct


Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P789432
CATALOG NUMBER: LER6D15D010-EC6DR1515309027-6LBDP1LI

Luminous Intensity Polar Plot

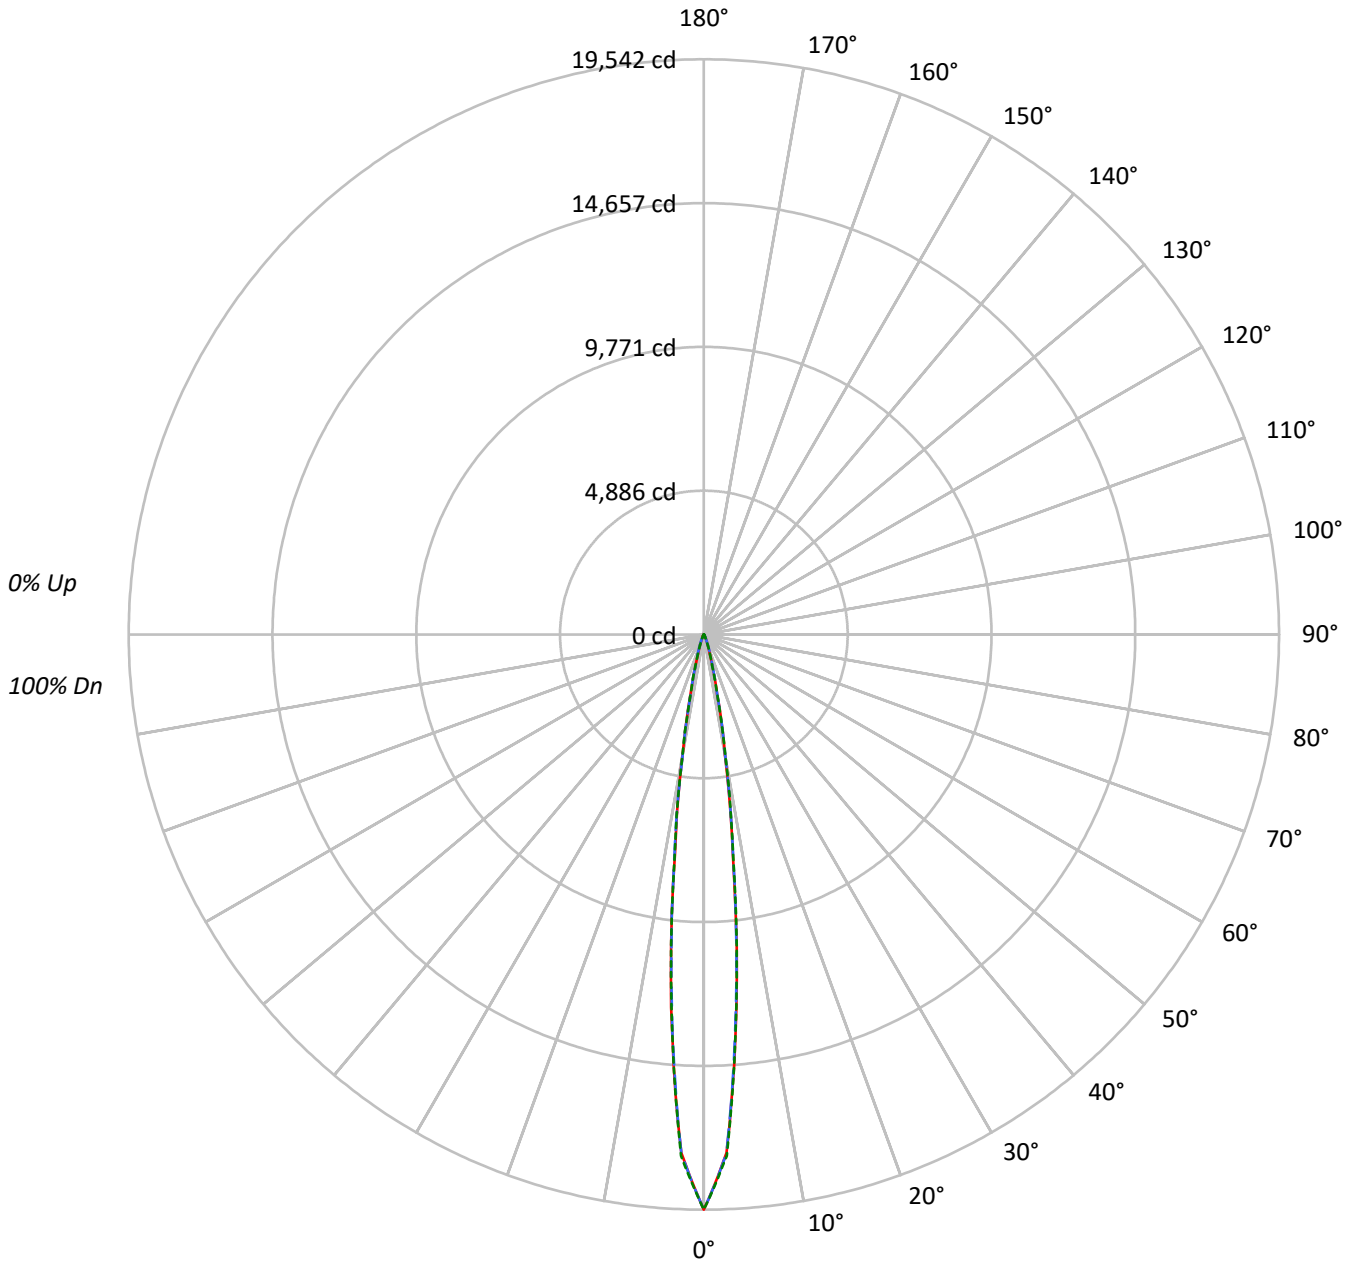



TEST NUMBER: P789432

CATALOG NUMBER: LER6D15D010-EC6DR1515309027-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2198865	2198865	2198865
5°	1292161	1275422	1285514
10°	385650	388346	394290
15°	95925	97792	94778
20°	28703	33236	29309
25°	10119	12893	10244
30°	3714	4897	3782
35°	1859	2106	1801
40°	1172	1292	1172
45°	868	924	868
50°	688	688	688
55°	578	578	578
60°	463	463	463
65°	357	357	357
70°	300	300	300
75°	189	189	249
80°	134	134	134
85°	66	66	66

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 924 cd/sqm



TEST NUMBER: P789432

CATALOG NUMBER: LER6D15D010-EC6DR1515309027-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	930.2	64.9
10°-20°	382.6	26.7
20°-30°	76.0	5.3
30°-40°	19.0	1.3
40°-50°	10.0	0.7
50°-60°	7.4	0.5
60°-70°	5.2	0.4
70°-80°	3.0	0.2
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1388.9	96.8
0°-40°	1407.8	98.2
0°-60°	1425.2	99.4
0°-90°	1434.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1434.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	19542	19542	19542	19542	19542	
5°	12714	12584	12550	12637	12649	928
15°	1104	1125	1126	1106	1091	379
25°	130	147	166	146	132	68
35°	26	27	29	27	25	17
45°	12	12	13	12	12	10
55°	8	8	8	8	8	7
65°	5	5	5	5	5	5
75°	2	2	2	2	3	3
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P789432

CATALOG NUMBER: LER6D15D010-EC6DR1515309027-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	19542.0	19542.0	19542.0	19542.0	19542.0
2.5°	17627.7	17642.6	17648.4	17665.8	17730.3
5°	12714.5	12583.8	12549.8	12636.7	12649.1
7.5°	7531.6	7558.0	7654.8	7676.3	7598.6
10°	4133.1	4167.0	4162.0	4191.8	4225.7
12.5°	2113.7	2087.2	2079.0	2112.9	2065.7
15°	1104.4	1125.1	1125.9	1106.1	1091.2
17.5°	594.0	618.0	657.7	625.4	575.8
20°	350.8	372.3	406.2	379.7	358.2
22.5°	216.7	234.1	258.1	237.4	220.1
25°	129.9	147.3	165.5	146.4	131.5
27.5°	76.9	91.8	103.4	91.0	76.1
30°	49.6	57.9	65.4	57.1	50.5
32.5°	34.7	38.1	41.4	38.1	34.7
35°	25.6	27.3	29.0	27.3	24.8
37.5°	19.9	21.5	22.3	20.7	19.0
40°	16.5	17.4	18.2	17.4	16.5
42.5°	14.1	14.9	14.9	14.9	14.1
45°	12.4	12.4	13.2	12.4	12.4
47.5°	10.8	10.8	11.6	10.8	10.8
50°	9.9	9.9	9.9	9.9	9.9
52.5°	9.1	9.1	9.1	9.1	9.1
55°	8.3	8.3	8.3	8.3	8.3
57.5°	7.4	7.4	7.4	7.4	7.4
60°	6.6	6.6	6.6	6.6	6.6
62.5°	5.8	5.8	5.8	5.8	5.8
65°	5.0	5.0	5.0	5.0	5.0
67.5°	5.0	5.0	5.0	5.0	5.0
70°	4.1	4.1	4.1	4.1	4.1
72.5°	3.3	3.3	3.3	3.3	3.3
75°	2.5	2.5	2.5	2.5	3.3
77.5°	2.5	2.5	2.5	2.5	2.5
80°	1.7	1.7	1.7	1.7	1.7
82.5°	1.7	1.7	1.7	1.7	1.7
85°	0.8	0.8	0.8	0.8	0.8
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)