

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P789459

Luminaire Tested: LER6D15D010-EC6DR1515309040-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P789459
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER6D15D010-EC6DR1515309040-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1691.3 lumens
Efficiency: N/A
Efficacy: 107.0 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P789459

CATALOG NUMBER: LER6D15D010-EC6DR1515309040-6LBS1LI

Luminous Intensity Polar Plot

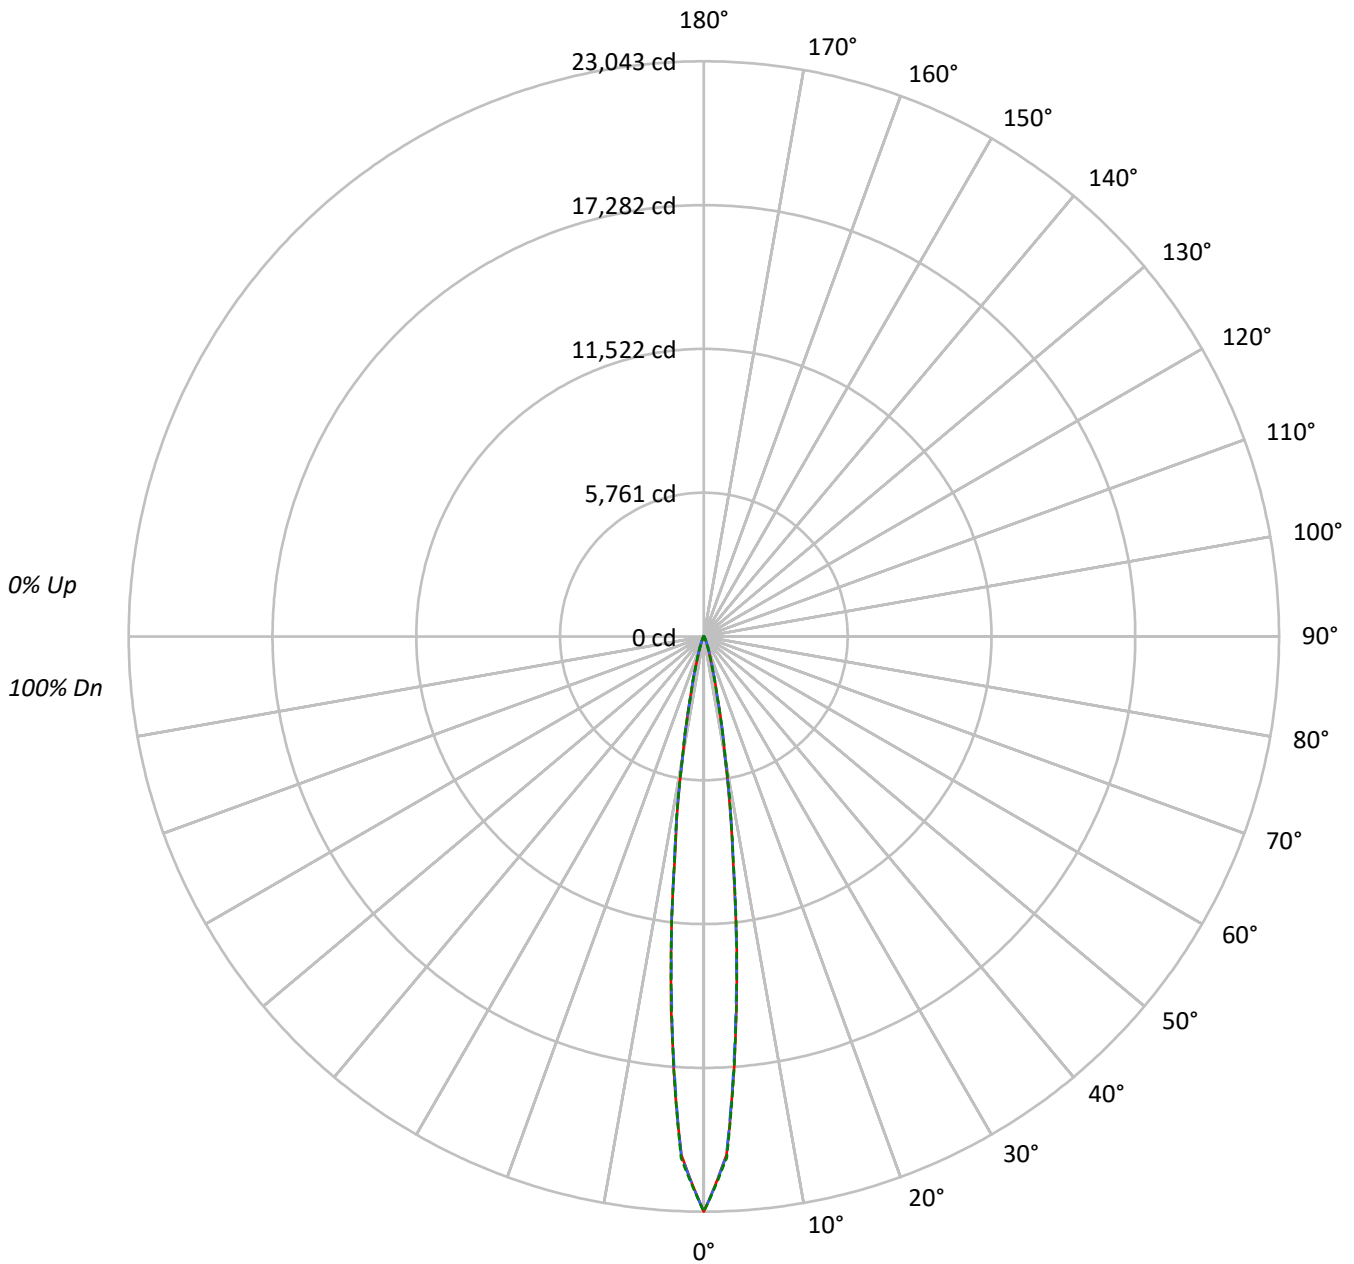



TEST NUMBER: P789459

CATALOG NUMBER: LER6D15D010-EC6DR1515309040-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2592775	2592775	2592775
5°	1523641	1503915	1515805
10°	454735	457926	464933
15°	113114	115311	111759
20°	33842	39193	34562
25°	11934	15198	12082
30°	4381	5773	4455
35°	2193	2476	2128
40°	1385	1527	1385
45°	1022	1092	1022
50°	814	814	814
55°	682	682	682
60°	548	548	548
65°	421	421	421
70°	358	358	358
75°	219	219	295
80°	158	158	158
85°	83	83	83

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 1092 cd/sqm



TEST NUMBER: P789459

CATALOG NUMBER: LER6D15D010-EC6DR1515309040-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1096.9	64.9
10°-20°	451.2	26.7
20°-30°	89.6	5.3
30°-40°	22.4	1.3
40°-50°	11.8	0.7
50°-60°	8.7	0.5
60°-70°	6.2	0.4
70°-80°	3.5	0.2
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1637.7	96.8
0°-40°	1660.1	98.2
0°-60°	1680.5	99.4
0°-90°	1691.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1691.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	23043	23043	23043	23043	23043	
5°	14992	14838	14798	14900	14915	1095
15°	1302	1327	1328	1304	1287	446
25°	153	174	195	173	155	80
35°	30	32	34	32	29	21
45°	15	15	16	15	15	11
55°	10	10	10	10	10	9
65°	6	6	6	6	6	6
75°	3	3	3	3	4	3
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P789459

CATALOG NUMBER: LER6D15D010-EC6DR1515309040-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	23042.8	23042.8	23042.8	23042.8	23042.8
2.5°	20785.6	20803.1	20810.0	20830.5	20906.5
5°	14992.2	14838.1	14798.1	14900.5	14915.1
7.5°	8880.8	8912.0	9026.1	9051.5	8959.8
10°	4873.5	4913.5	4907.7	4942.8	4982.8
12.5°	2492.4	2461.1	2451.4	2491.4	2435.8
15°	1302.3	1326.7	1327.6	1304.2	1286.7
17.5°	700.4	728.7	775.5	737.5	678.9
20°	413.6	439.0	479.0	447.7	422.4
22.5°	255.6	276.1	304.4	280.0	259.5
25°	153.2	173.6	195.1	172.7	155.1
27.5°	90.7	108.3	121.9	107.3	89.7
30°	58.5	68.3	77.1	67.3	59.5
32.5°	41.0	44.9	48.8	44.9	41.0
35°	30.2	32.2	34.1	32.2	29.3
37.5°	23.4	25.4	26.3	24.4	22.4
40°	19.5	20.5	21.5	20.5	19.5
42.5°	16.6	17.6	17.6	17.6	16.6
45°	14.6	14.6	15.6	14.6	14.6
47.5°	12.7	12.7	13.7	12.7	12.7
50°	11.7	11.7	11.7	11.7	11.7
52.5°	10.7	10.7	10.7	10.7	10.7
55°	9.8	9.8	9.8	9.8	9.8
57.5°	8.8	8.8	8.8	8.8	8.8
60°	7.8	7.8	7.8	7.8	7.8
62.5°	6.8	6.8	6.8	6.8	6.8
65°	5.9	5.9	5.9	5.9	5.9
67.5°	5.9	5.9	5.9	5.9	5.9
70°	4.9	4.9	4.9	4.9	4.9
72.5°	3.9	3.9	3.9	3.9	3.9
75°	2.9	2.9	2.9	2.9	2.9
77.5°	2.9	2.9	2.9	2.9	2.9
80°	2.0	2.0	2.0	2.0	2.0
82.5°	2.0	2.0	2.0	2.0	2.0
85°	1.0	1.0	1.0	1.0	1.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)